



64-Ball Ultra Thin Fine Pitch Land Grid Array (BZB) - 6x6 mm Body [UFBGA]
Atmel Legacy Global Package code CIQ

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

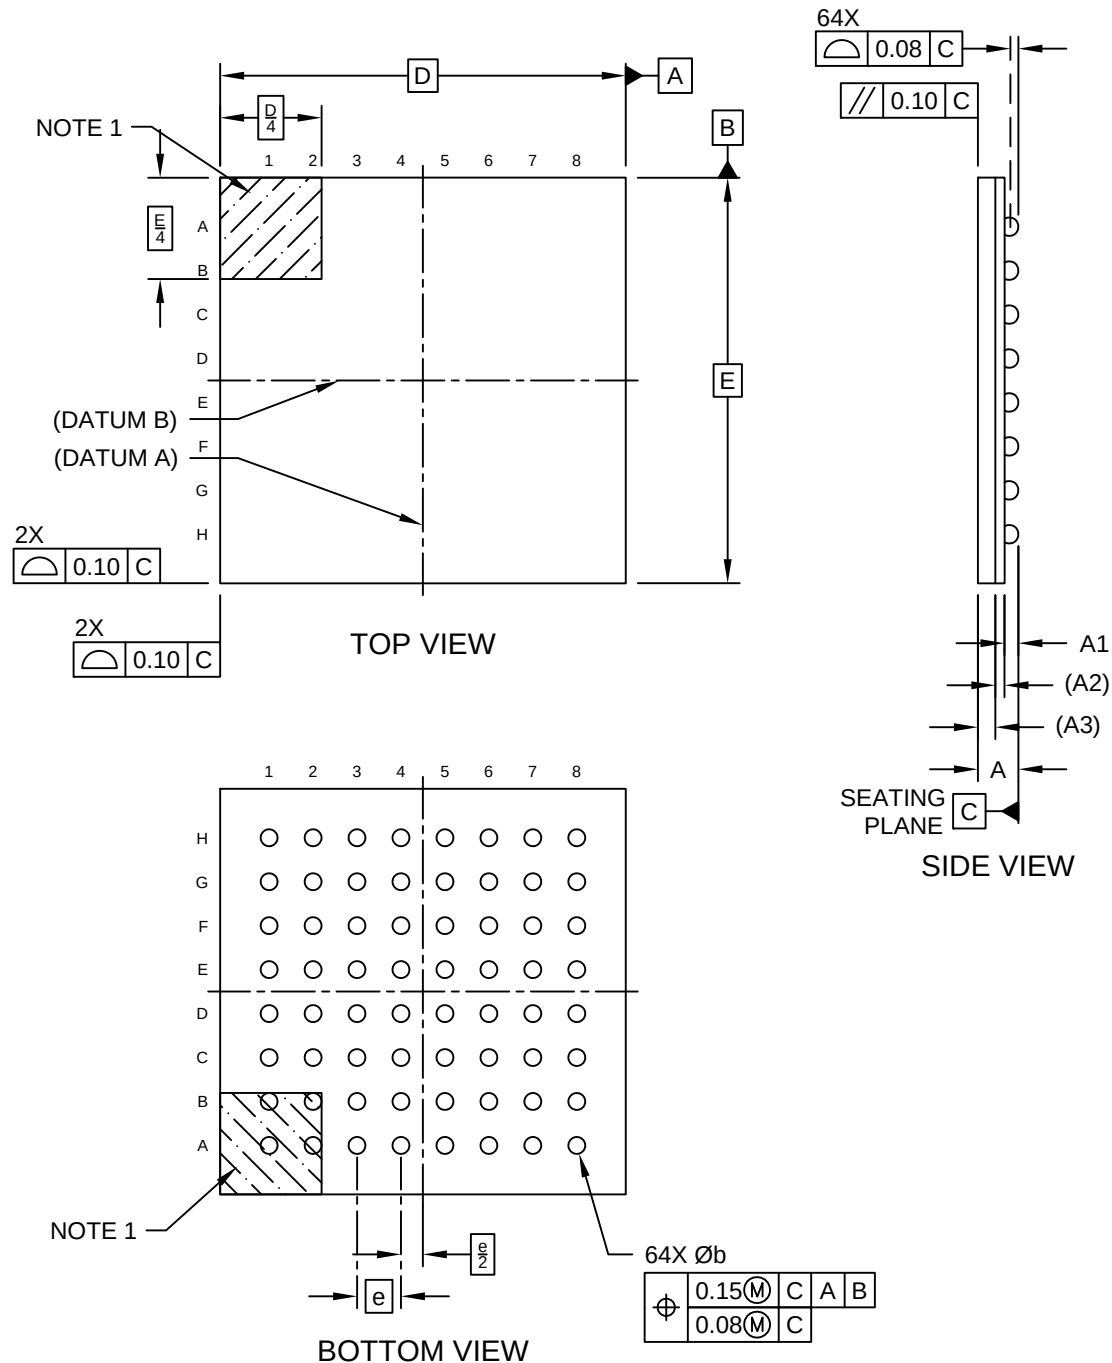

64-Ball Ultra Thin Fine Pitch Land Grid Array (BZB) - 6x6 mm Body [UFBGA] Atmel Legacy Global Package code CIQ

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

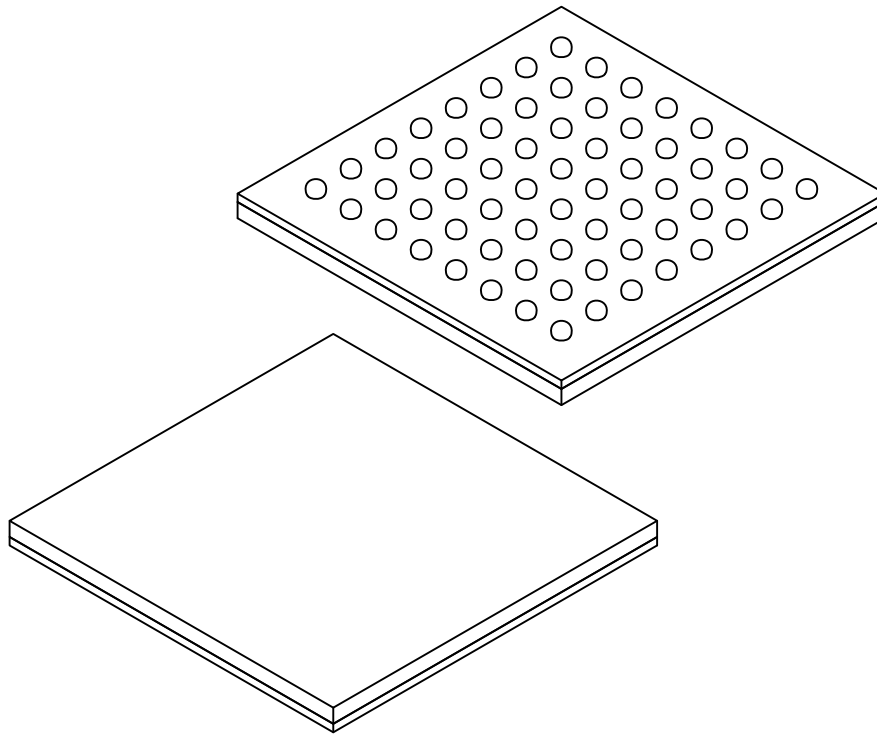


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	64		
Pitch	e	0.65 BSC		
Overall Height	A	-	-	0.60
Ball Height	A1	0.105	0.155	0.205
Substrate Thickness	A2	0.136 REF		
Mold Cap Thickness	A3	0.250 REF		
Overall Length	D	6.00 BSC		
Overall Width	E	6.00 BSC		
Ball Diameter	b	-	0.25	-

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

64-Ball Ultra Thin Fine Pitch Land Grid Array (BZB) - 6x6 mm Body [UFBGA] Atmel Legacy Global Package code CIQ

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

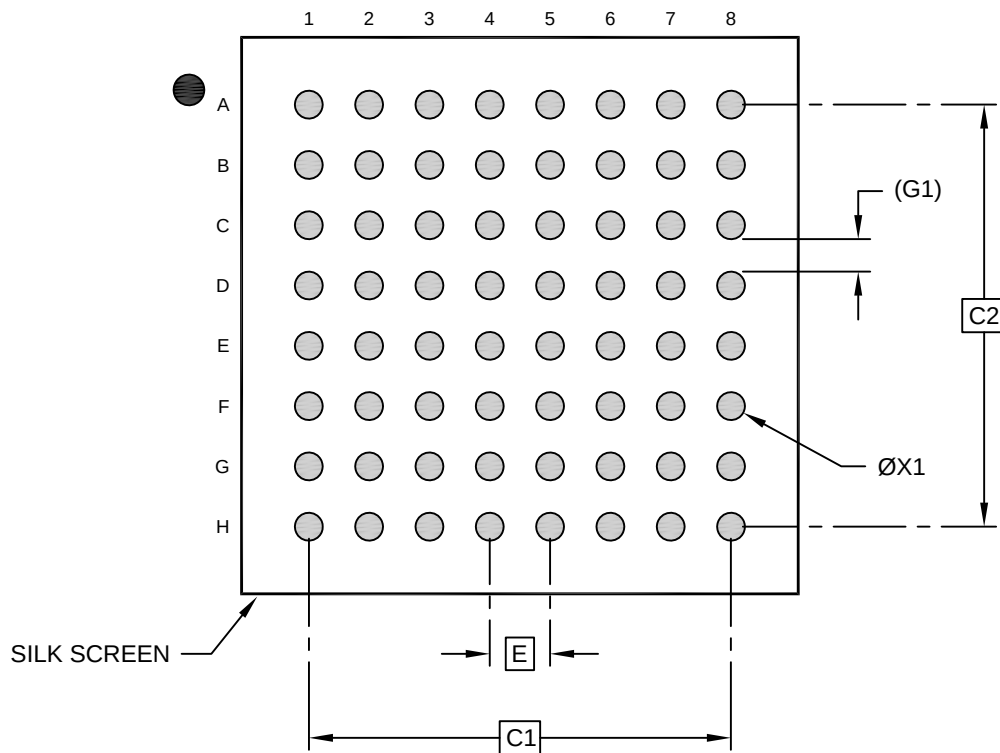

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.65 BSC		
Contact Pad Spacing	C1	4.55 BSC		
Contact Pad Spacing	C2	4.55 BSC		
Contact Pad Diameter (X64)	X1			0.30
Contact Pad to Contact Pad	G1	0.35 REF		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.