



162-Ball Ultra Thin Fine Pitch Ball Grid Array (C6B) - 10x5x0.6 mm Body [UFBGA] **Atmel Legacy Global Package Code CAK**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

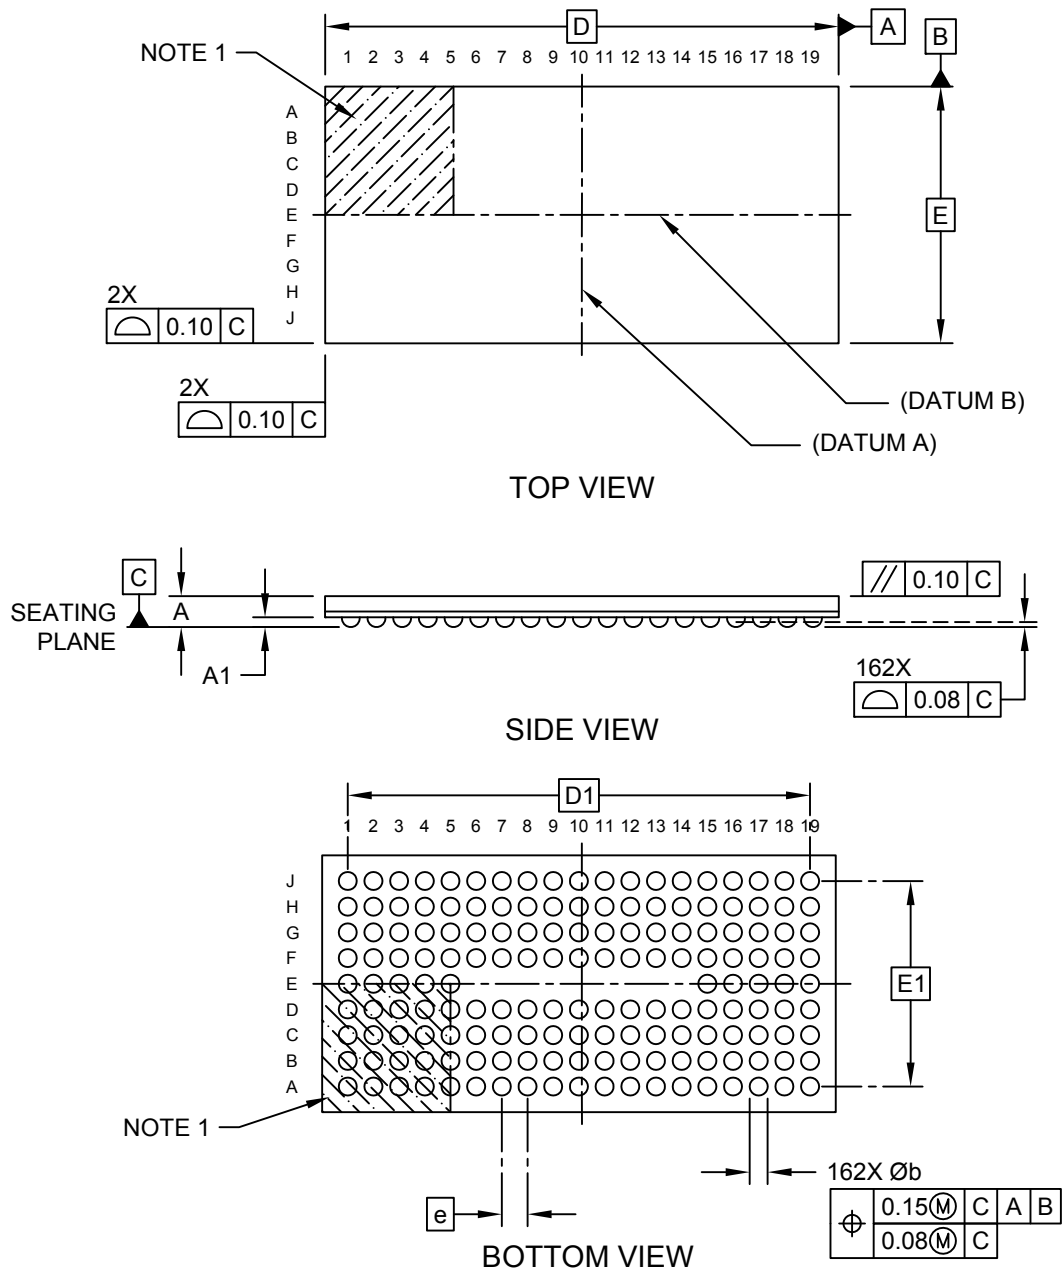

**162-Ball Ultra Thin Fine Pitch Ball Grid Array (C6B) - 10x5x0.6 mm Body [UFBGA]
Atmel Legacy Global Package Code CAK**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

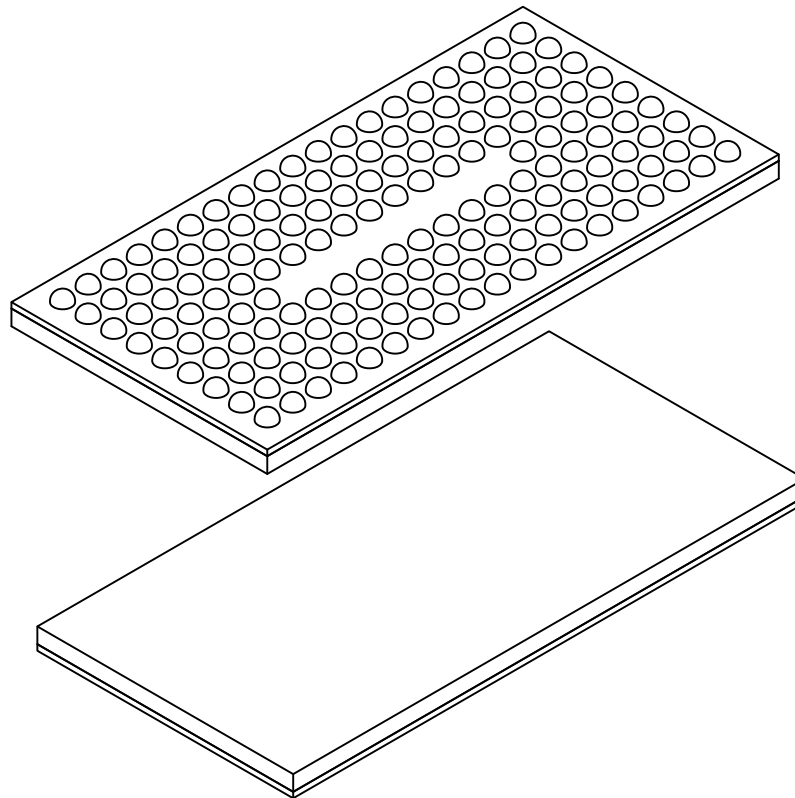


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	162		
Pitch	e	0.50 BSC		
Overall Height	A	0.488	0.546	0.60
Standoff	A1	0.120	0.155	0.190
Overall Length	D	10.00 BSC		
Overall Ball Spacing	D1	9.00 BSC		
Overall Width	E	5.00 BSC		
Exposed Pad Width	E1	4.00 BSC		
Ball Diameter	b	0.20	0.25	0.30

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

162-Ball Ultra Thin Fine Pitch Ball Grid Array (C6B) - 10x5x0.6 mm Body [UFBGA] Atmel Legacy Global Package Code CAK

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

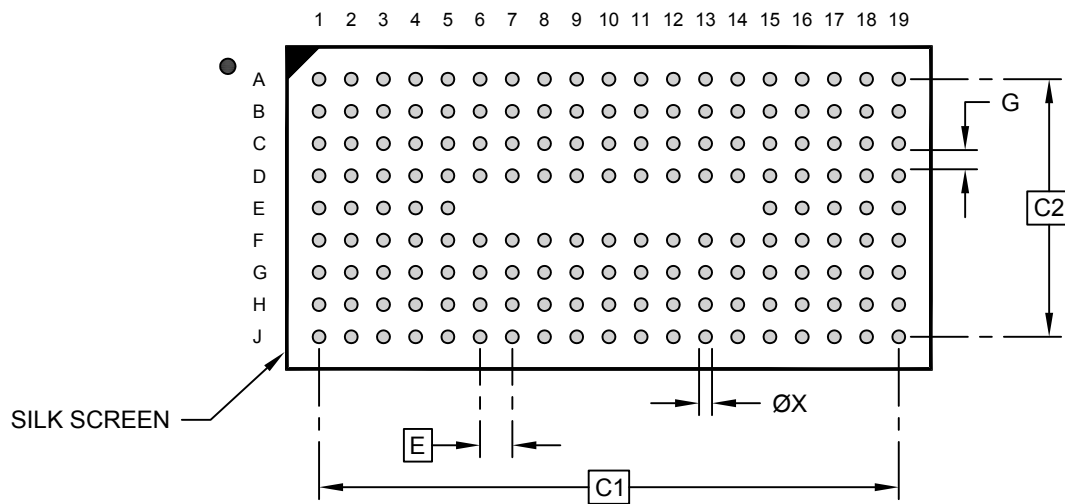

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Contact Pad Spacing	C1	9.00 BSC		
Contact Pad Spacing	C2	4.00 BSC		
Contact Pad Diameter (X162)	X1			0.20
Contact Pad to Contact Pad	G	0.30		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-23167 Rev A