



96-Ball Very Thin Fine-Pitch Ball Grid Array (CAB) - 6x6x1.0 mm Body [VFBGA] **Atmel Legacy Global Package Code CXZ**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

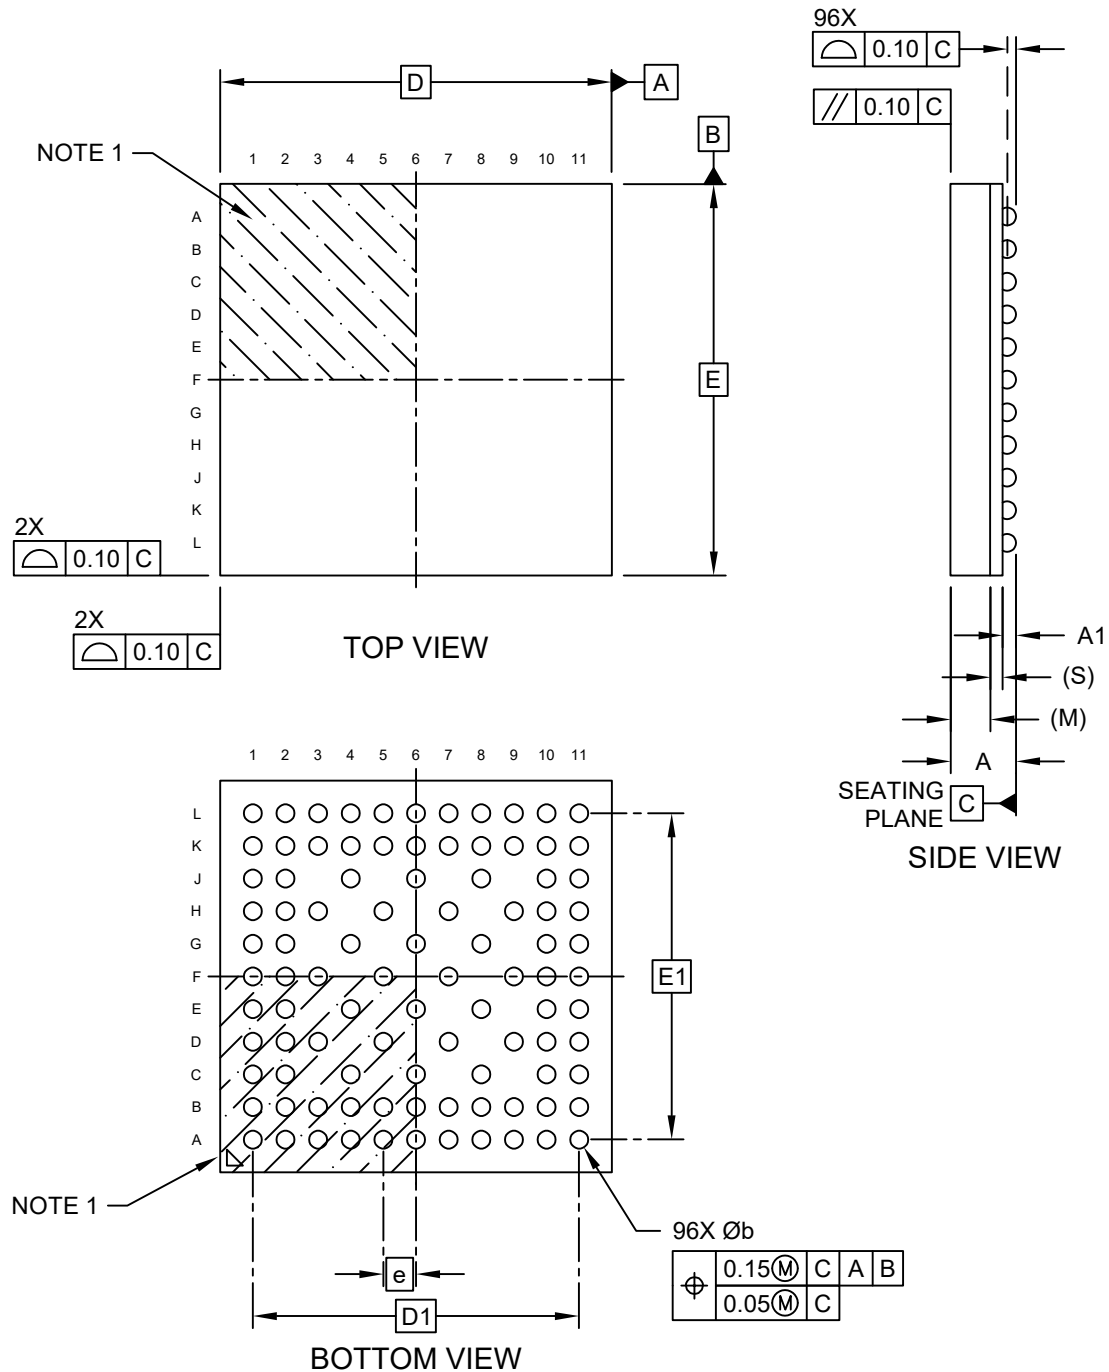

**96-Ball Very Thin Fine-Pitch Ball Grid Array (CAB) - 6x6x1.0 mm Body [VFBGA]
Atmel Legacy Global Package Code CXZ**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

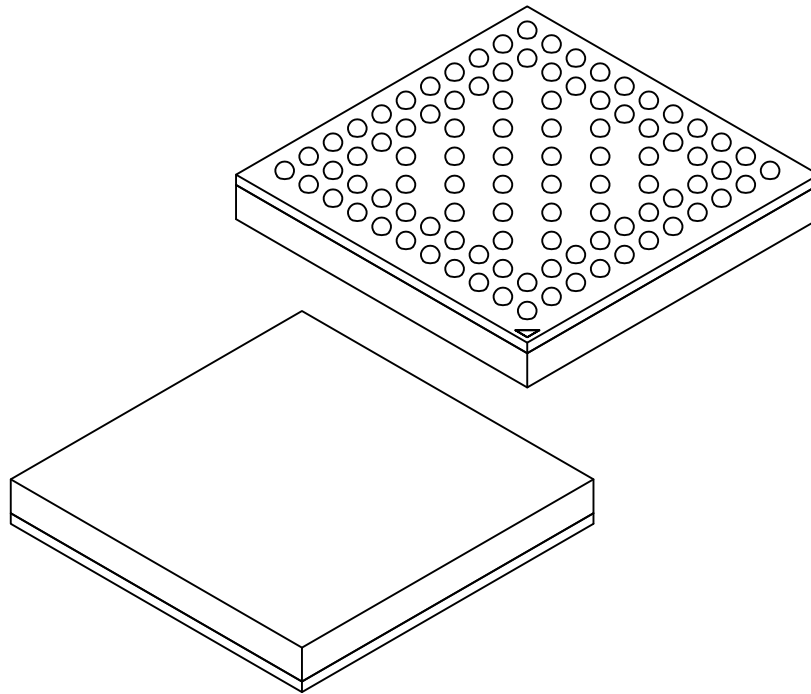


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	96		
Pitch	e	0.50 BSC		
Overall Height	A	–	–	1.00
Ball Height	A1	0.105	–	0.205
Mold Thickness	M	0.53 REF		
Substrate Thickness	S	0.11 REF		
Overall Length	D	6.00 BSC		
Ball Array Length	D1	5.00 BSC		
Overall Width	E	6.00 BSC		
Ball Array Width	E1	5.00 BSC		
Ball Diameter	b	0.225	0.25	0.325

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

**96-Ball Very Thin Fine-Pitch Ball Grid Array (CAB) - 6x6x1.0 mm Body [VFBGA]
Atmel Legacy Global Package Code CXZ**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

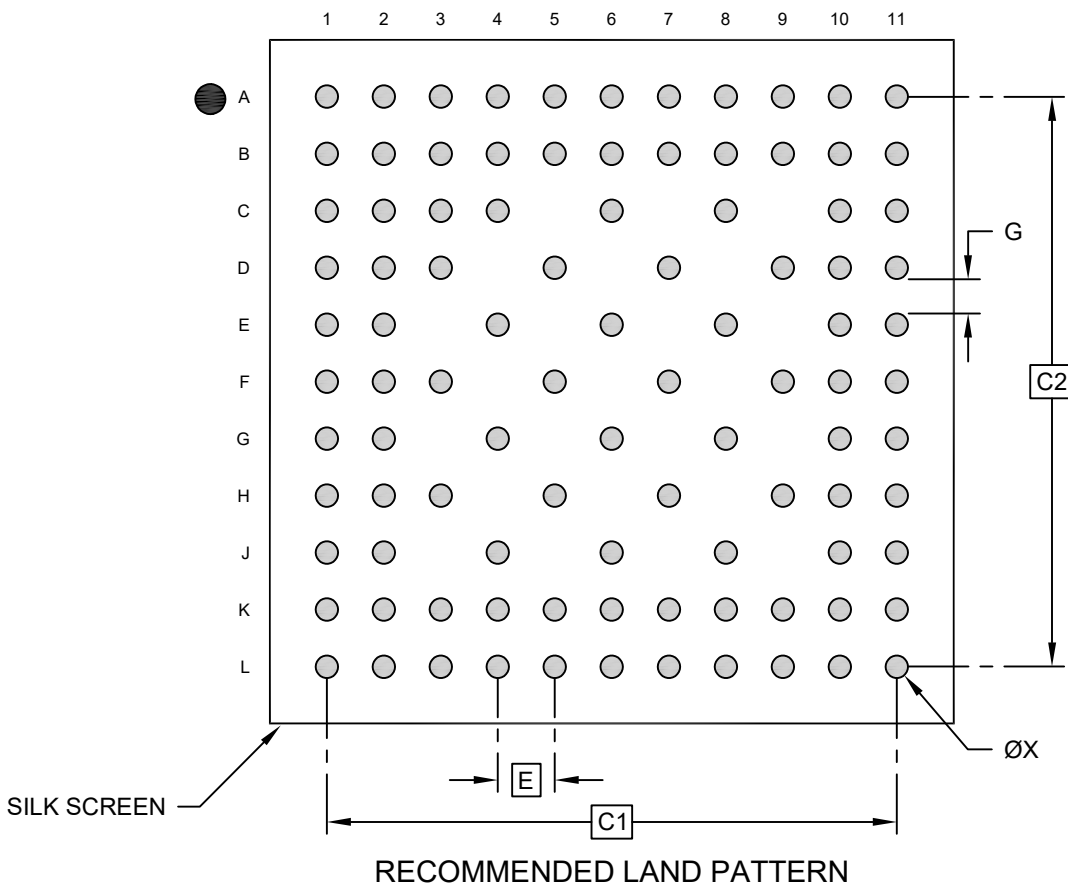

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Contact Pad Spacing	C1	5.00 BSC		
Contact Pad Spacing	C2	5.00 BSC		
Contact Pad Diameter	X			0.20
Contact Pad to Contact Pad (Xnn)	G	0.30		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-23171 Rev A