



100-Ball Very Thin Fine Pitch Ball Grid Array (CBB) - 7x7 mm Body [VFBGA] Atmel Legacy Global Package Code CIF

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

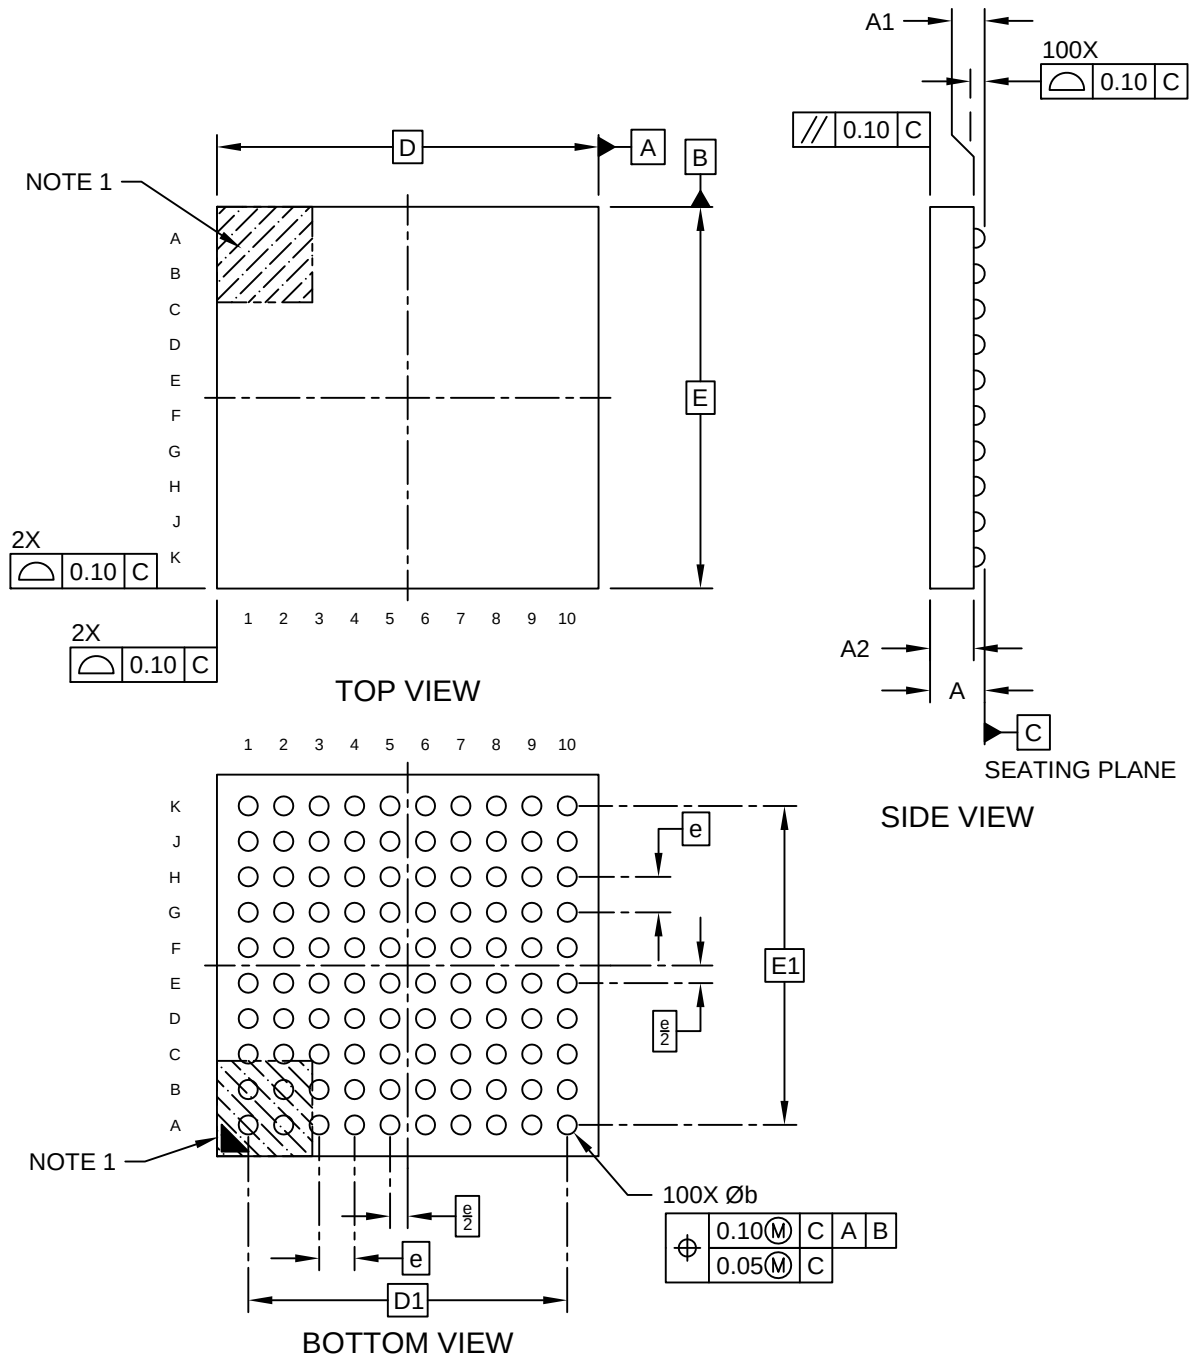

**100-Ball Very Thin Fine Pitch Ball Grid Array (CBB) - 7x7 mm Body [VFBGA]
Atmel Legacy Global Package Code CIF**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

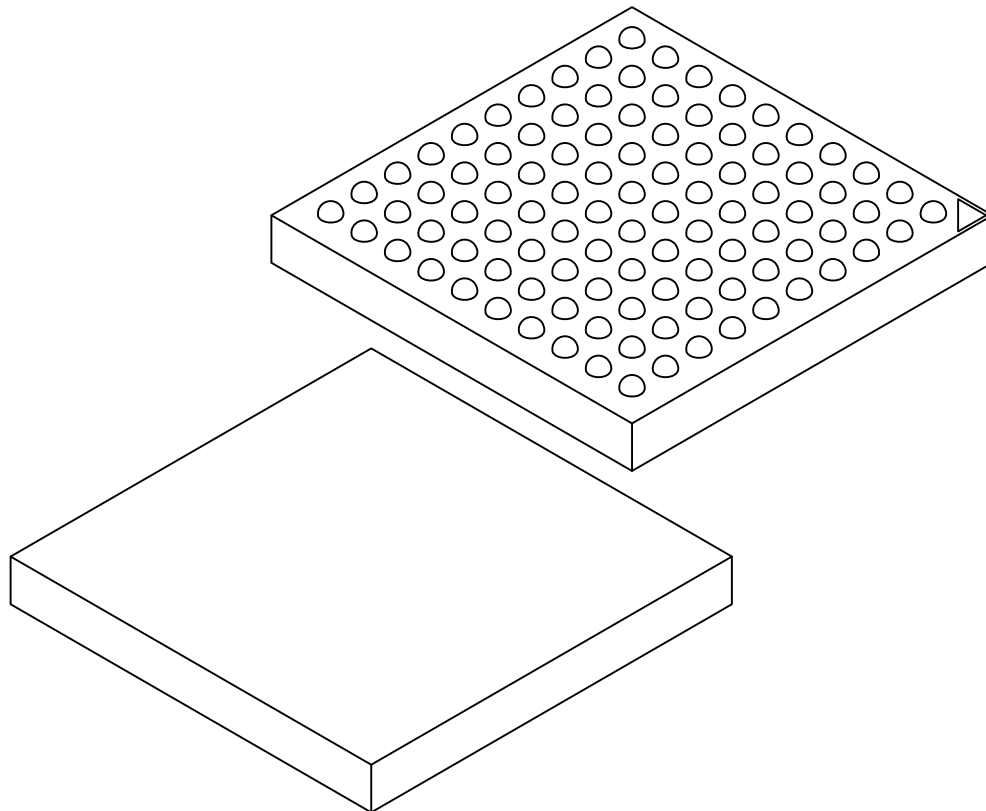


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	100		
Pitch	e	0.65 BSC		
Overall Height	A	-	-	1.00
Ball Height	A1	0.20	-	-
Molded Package Thickness	A2	0.65	-	-
Overall Length	D	7.00 BSC		
Overall Pitch	D1	5.85 BSC		
Overall Width	E	7.00 BSC		
Overall Pitch	E1	5.85 BSC		
Terminal Width	b	0.30	0.35	0.40

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

100-Ball Very Thin Fine Pitch Ball Grid Array (CBB) - 7x7 mm Body [VFBGA] Atmel Legacy Global Package Code CIF

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

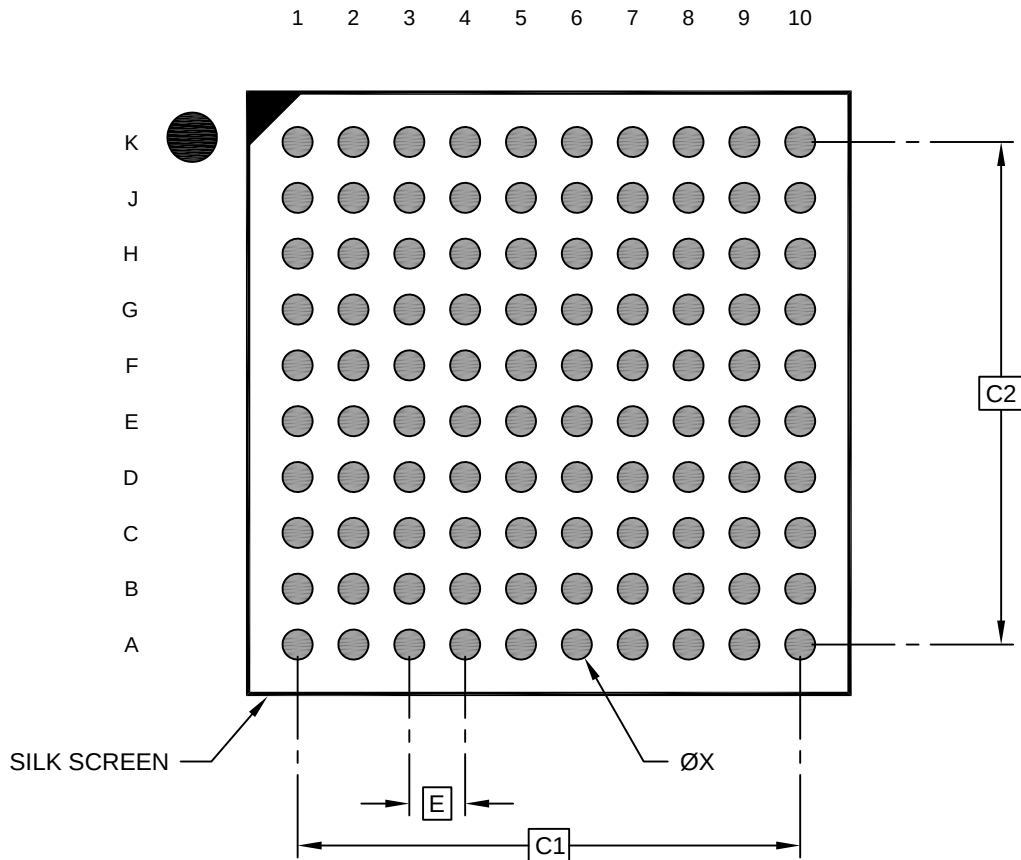

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.65 BSC		
Contact Pad Spacing	C1	5.85 BSC		
Contact Pad Spacing	C2	5.85 BSC		
Contact Pad Width (X100)	X1			0.35

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-23172 Rev A