



49-Ball Wafer Lever Chip Scale Package (FRB) - 2.84x2.84x0.53 mm Body [WLCSP]
Atmel Legacy Global Package Code GBR

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

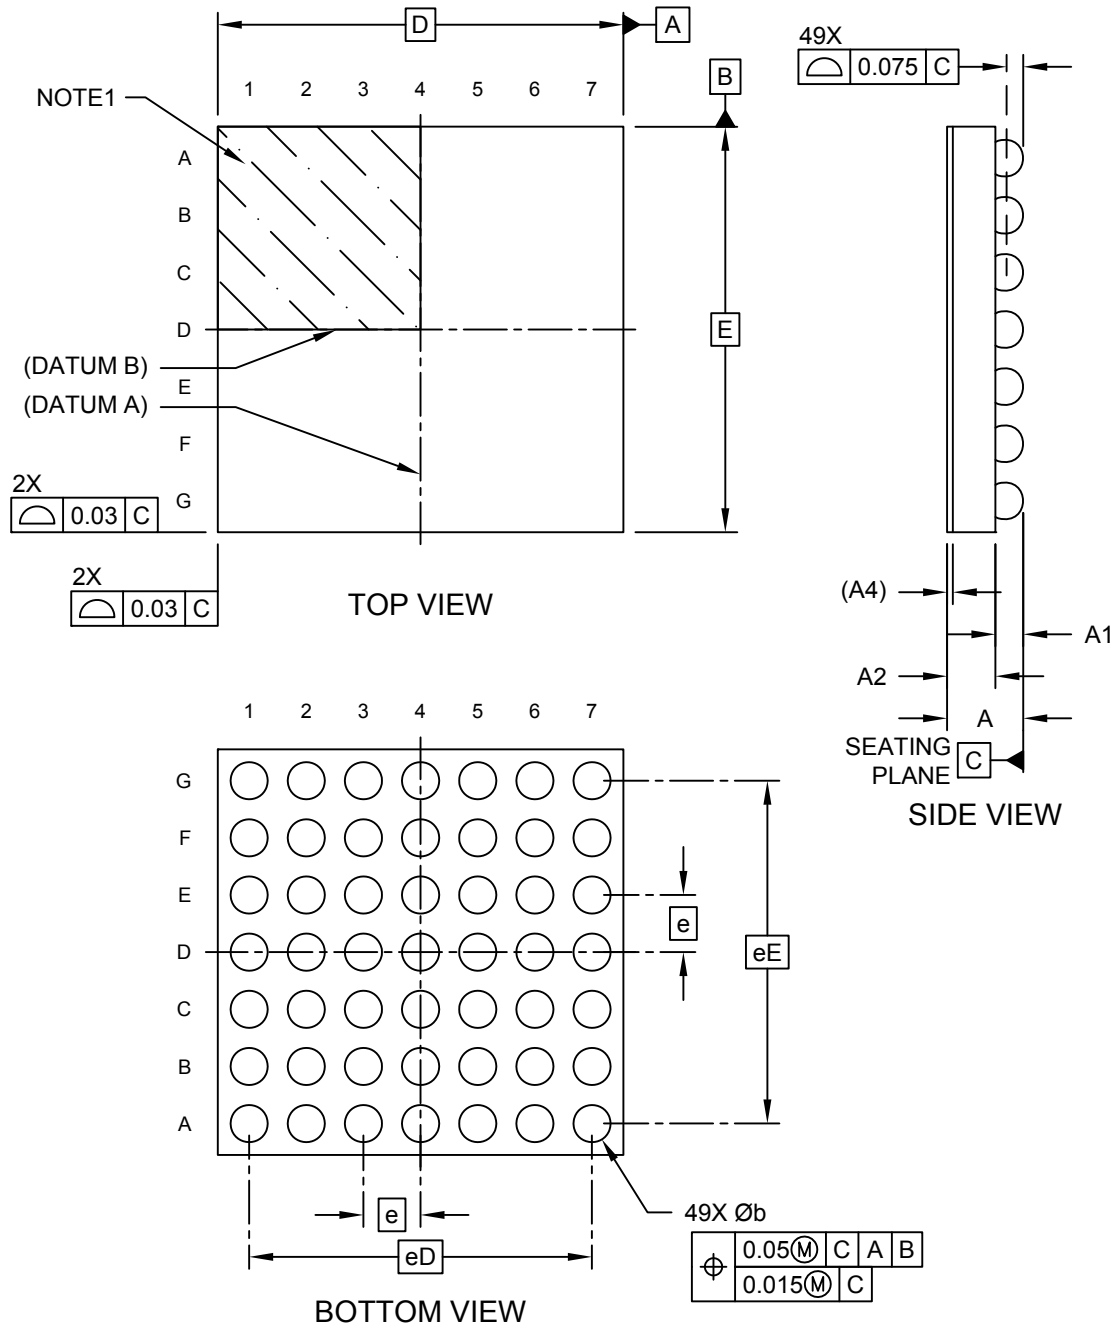

**49-Ball Wafer Lever Chip Scale Package (FRB) - 2.84x2.84x0.53 mm Body [WLCSP]
Atmel Legacy Global Package Code GBR**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

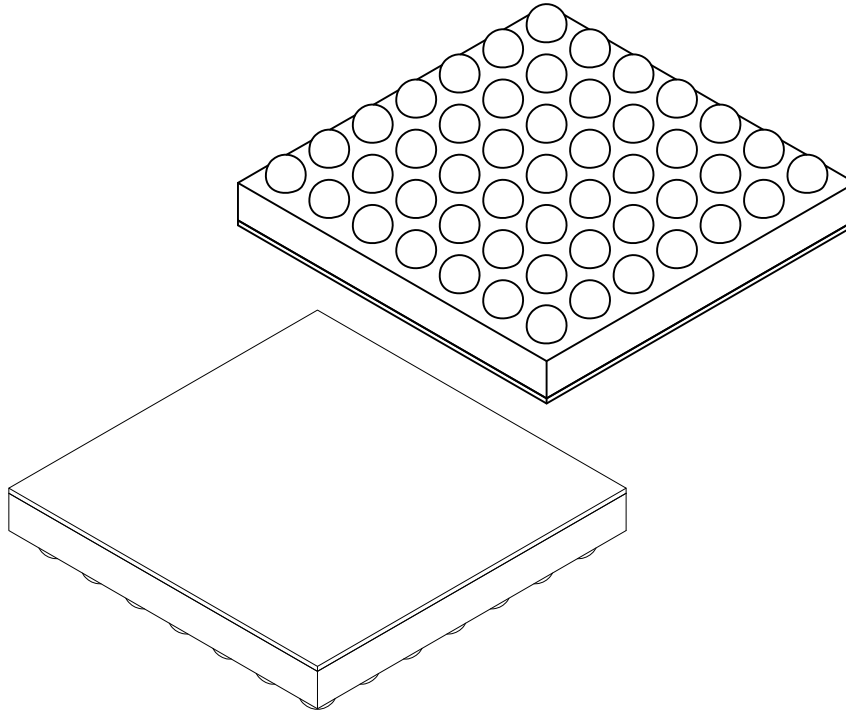


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	49		
Pitch	e	0.40 BSC		
Overall Terminal Spacing	eD	2.40 BSC		
Overall Terminal Spacing	eE	2.40 BSC		
Overall Height	A	0.455	0.494	0.533
Standoff	A1	0.17	0.20	0.23
Package Thickness	A2	0.229	0.254	0.279
Backside Coating Thickness	A4	0.04 REF		
Overall Length	D	2.84 BSC		
Overall Width	E	2.84 BSC		
Terminal Width	b	0.23	0.26	0.29

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

**49-Ball Wafer Lever Chip Scale Package (FRB) - 2.84x2.84x0.53 mm Body [WLCSP]
Atmel Legacy Global Package Code GBR**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

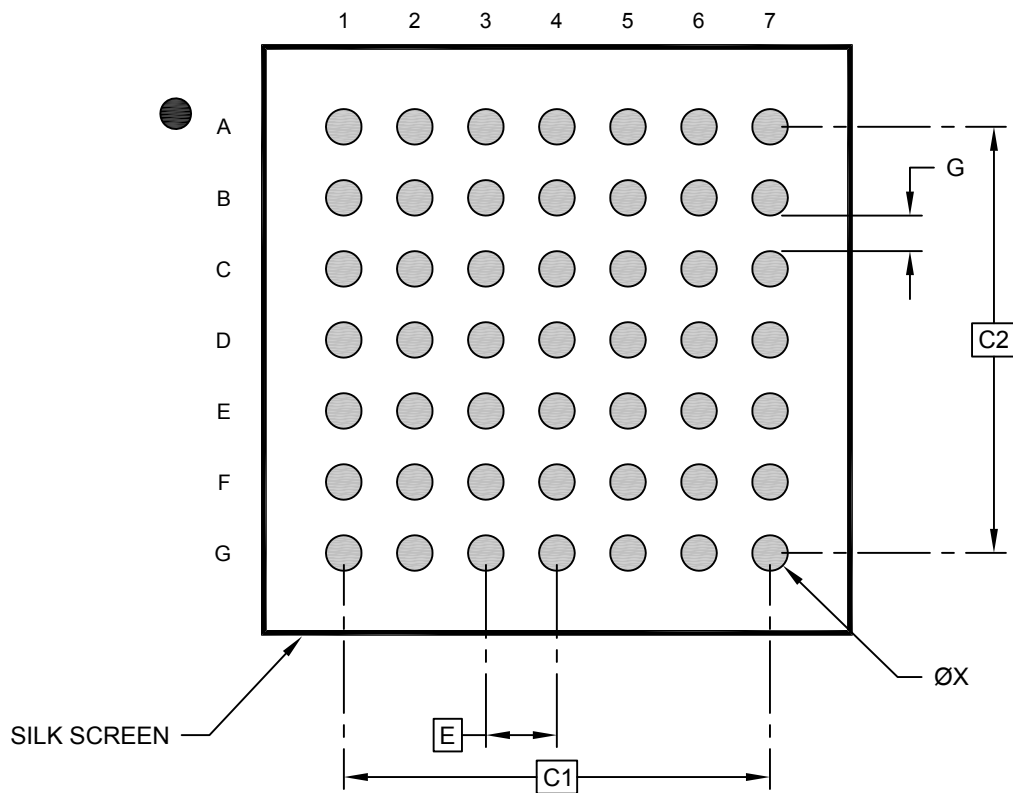

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.40 BSC		
Contact Pad Spacing	C1	2.40 BSC		
Contact Pad Spacing	C2	2.40 BSC		
Contact Pad Diameter (X49)	X			0.20
Contact Pad to Contact Pad (Xnn)	G	0.20		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.