


Packaging Diagrams and Parameters

55-Ball Wafer Level Chip Scale Package - (FWB) [WLCSP]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

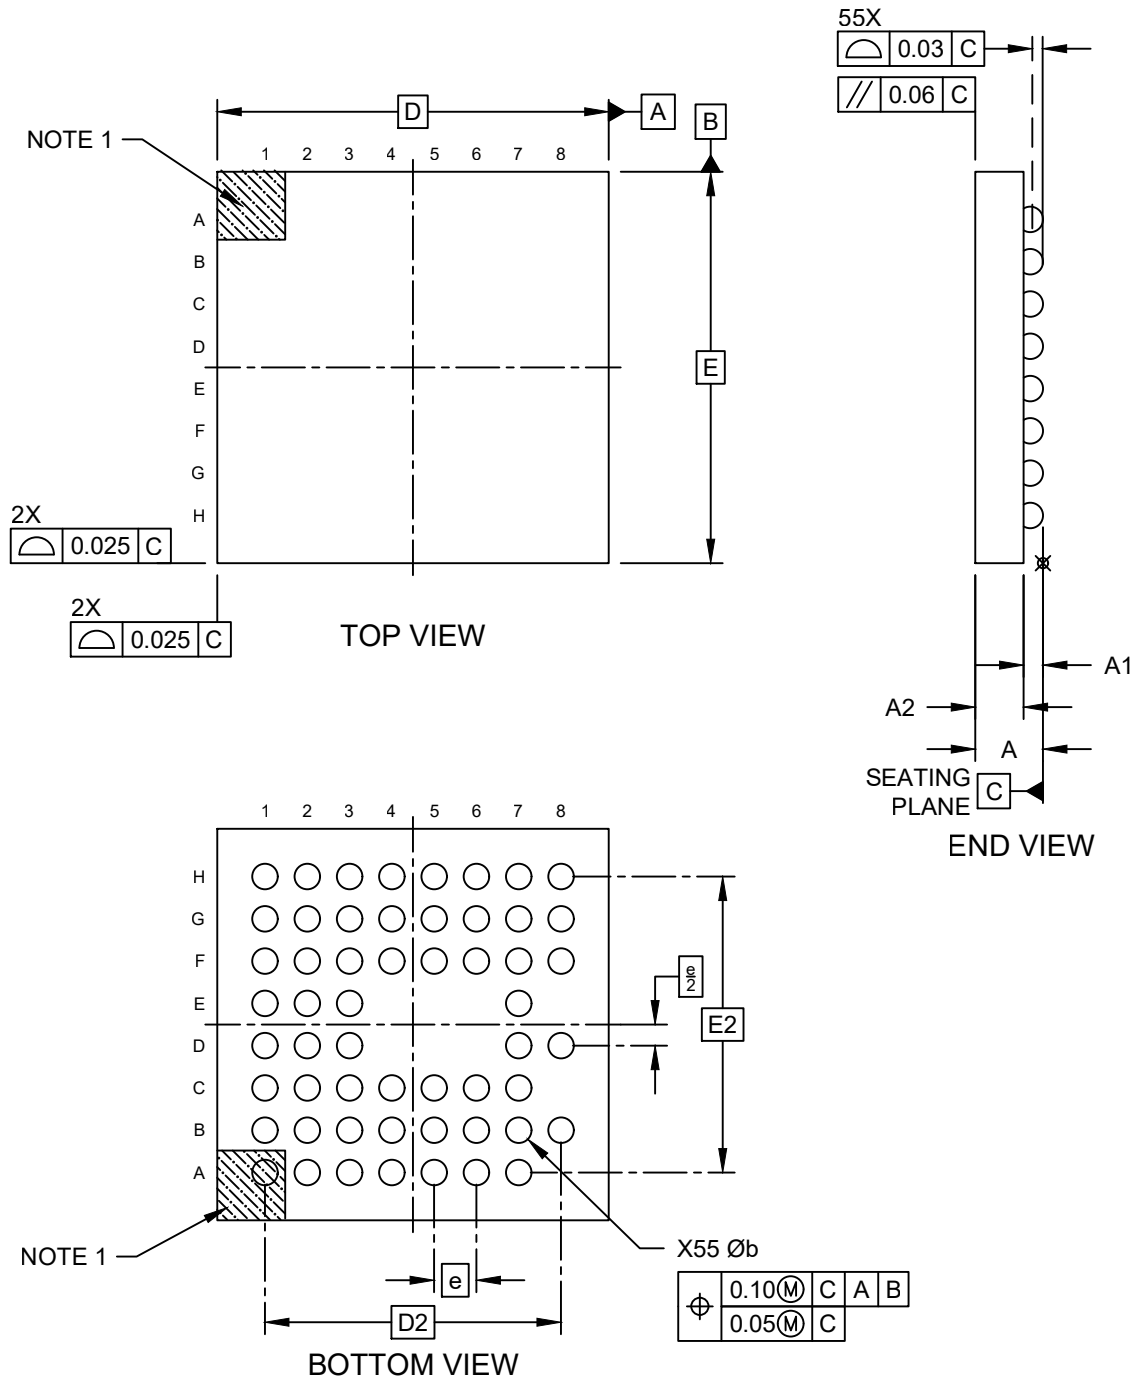

Packaging Diagrams and Parameters

55-Ball Wafer Level Chip Scale Package - (FWB) [WLCSP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

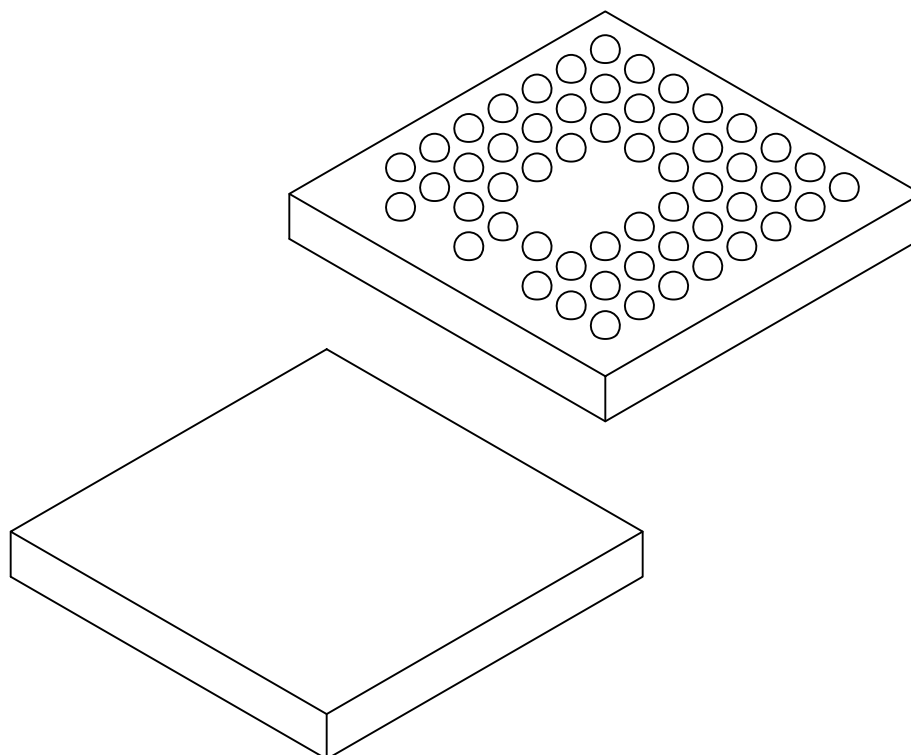

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	105		
Pitch	e	0.350 BSC		
Overall Height	A	0.531	0.560	0.589
Ball Height	A1	0.136	0.160	0.184
Die Thickness	A2	0.384	0.400	0.416
Overall Length	D	See Note 4.		
Ball Array Length	D2	2.450 BSC		
Overall Width	E	See Note 4.		
Ball Array Width	E2	2.450 BSC		
Ball Diameter	b	0.190	0.211	0.253


Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.
- Please contact your local Microchip representative for details.

Land Pattern

55-Ball Wafer Level Chip Scale Package - (FWB) [WLCSP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

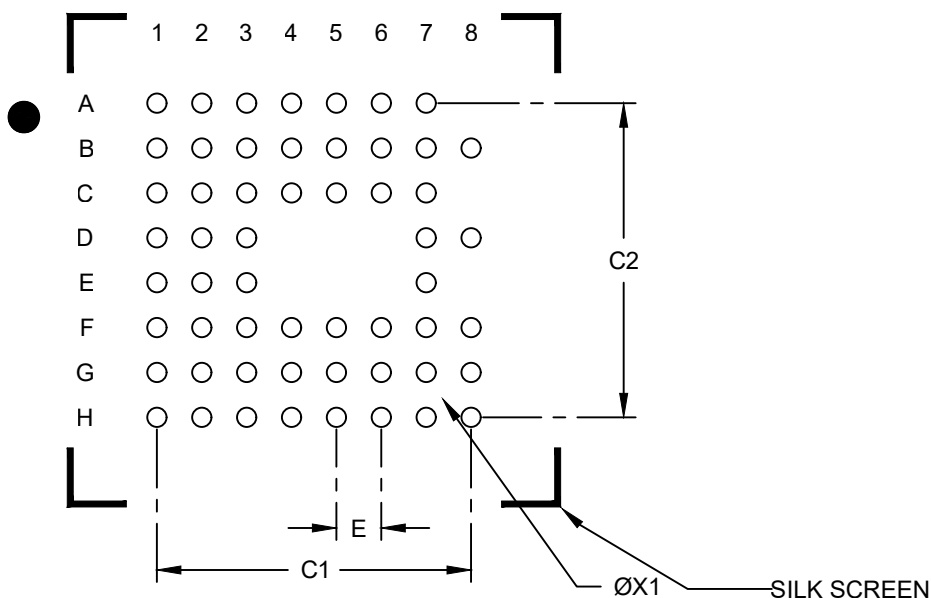

RECOMMENDED LAND PATTERN

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Ball Pitch	E	0.350 BSC		
Contact Pad Spacing	C1		2.460	
Contact Pad Spacing	C2		2.460	
Contact Pad Diameter (X12)	X1			0.150

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-23251 Rev A