
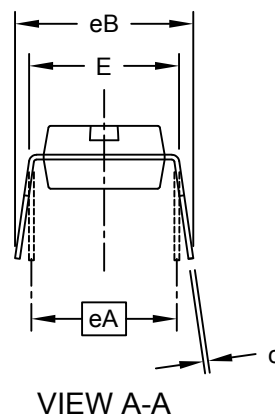
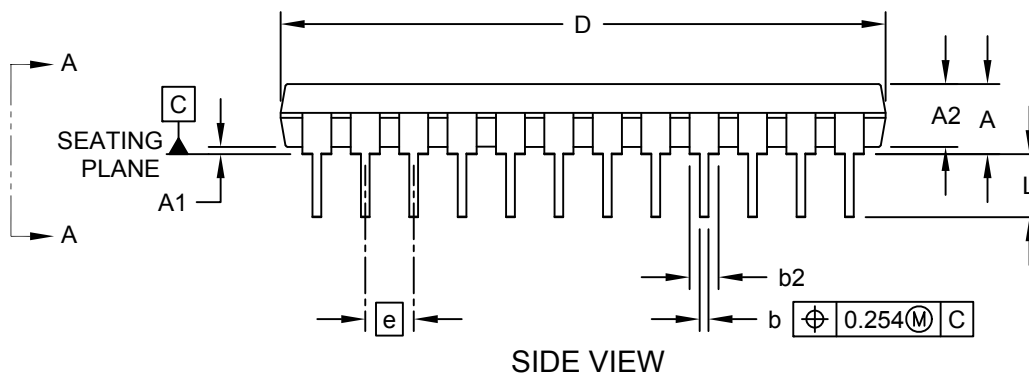



24-Lead Skinny Plastic Dual In-Line (JDB) - 300 mil Body [SPDIP]
Atmel Legacy Global Package Code PHW

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/package3>

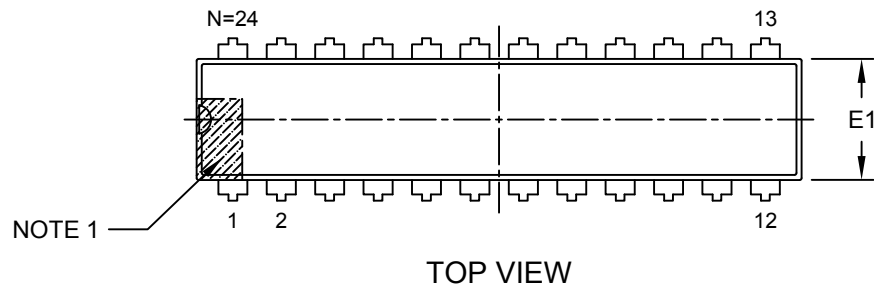

24-Lead Skinny Plastic Dual In-Line (JDB) - 300 mil Body [SPDIP] Atmel Legacy Global Package Code PHW

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

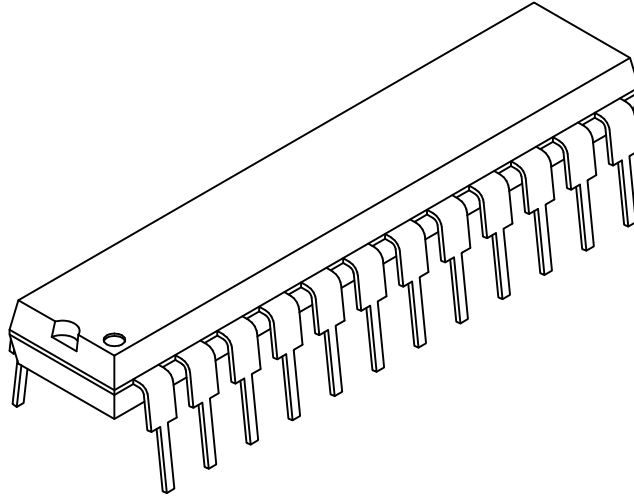

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Pins	N	24		
Pitch	e	2.54 BSC		
Top to Seating Plane	A	-	-	5.334
Molded Package Thickness	A2	2.921	3.302	4.953
Base to Seating Plane	A1	0.381	-	-
Shoulder to Shoulder Width	E	7.620	7.874	8.255
Molded Package Width	E1	6.096	6.350	7.112
Overall Length	D	31.242	31.750	32.512
Tip to Seating Plane	L	2.921	3.302	3.810
Lead Thickness	c	0.203	0.254	0.356
Upper Lead Width	b2	1.143	1.524	1.778
Lower Lead Width	b	0.356	0.457	0.588
Overall Row Spacing	eA	7.62 BSC		
Overall Row Spacing	eB	-	-	10.922

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensions D and E do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .005" per side.
- Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-21286 Rev A Sheet 2 of 2