




52-Lead Plastic Leadless Chip Carrier – Square (KBB) - 19.1x19.1x4.4 mm Body [PLCC]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

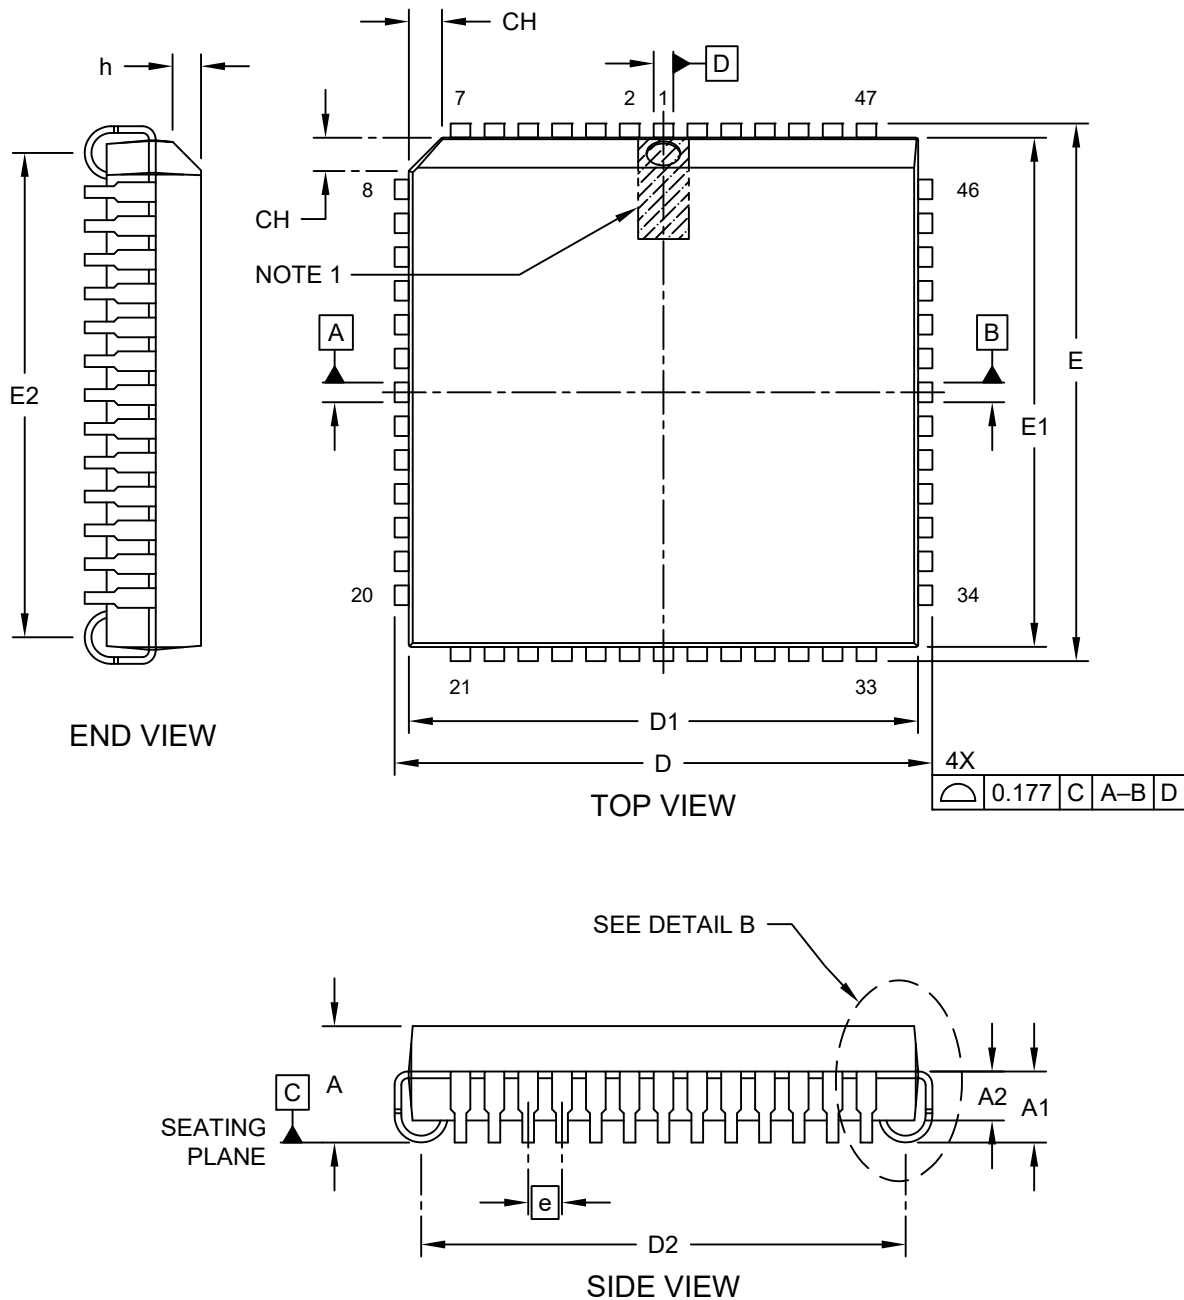

52-Lead Plastic Leadless Chip Carrier – Square (KBB) - 19.1x19.1x4.4 mm Body [PLCC]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

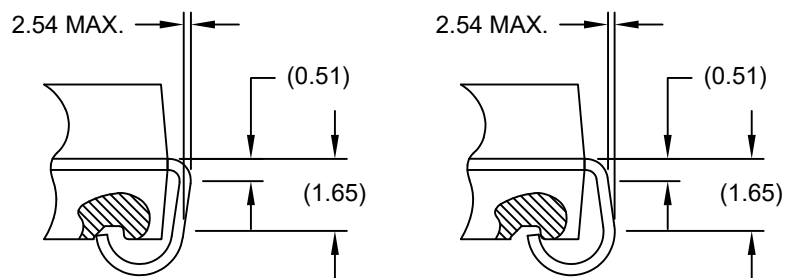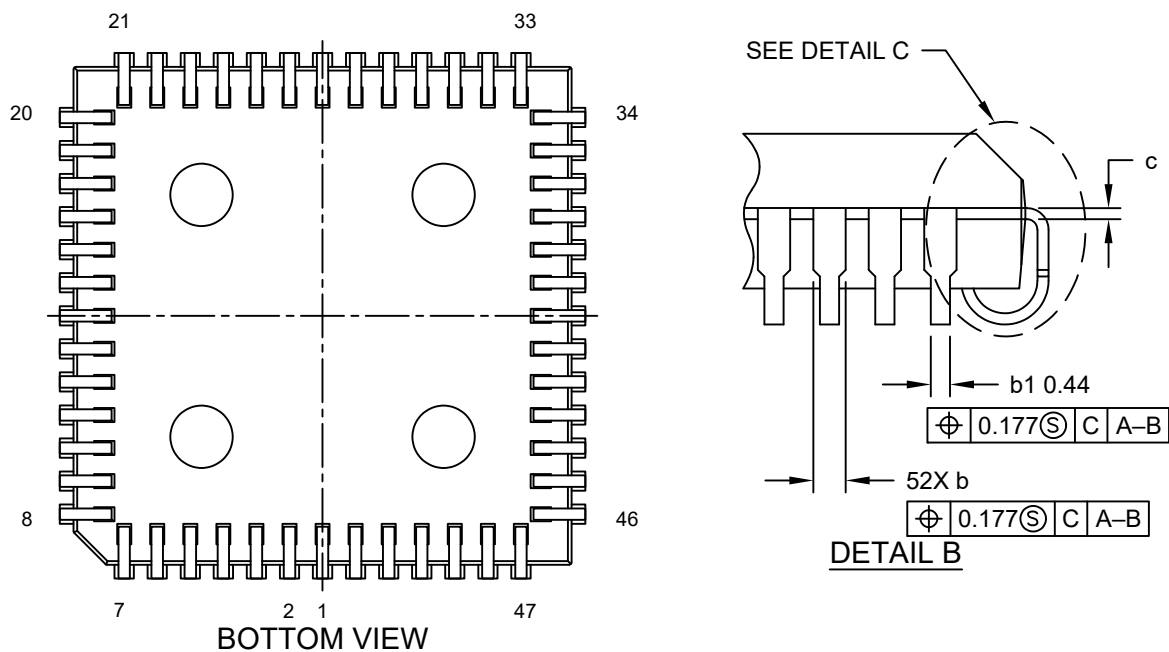

DETAIL C

52-Lead Plastic Leadless Chip Carrier – Square (KBB) - 19.1x19.1x4.4 mm Body [PLCC]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

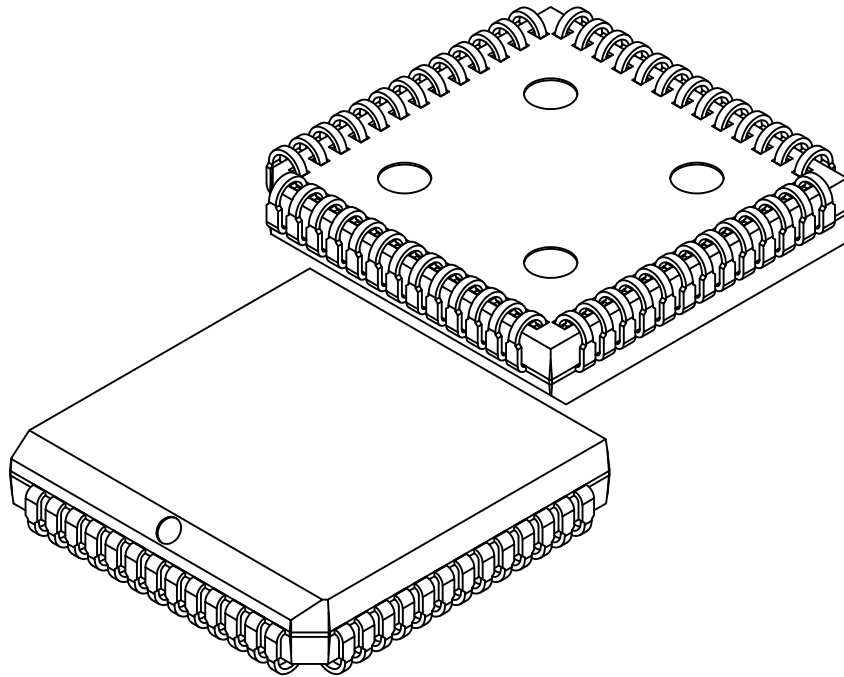


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	52		
Pitch	e	1.27 BSC		
Overall Height	A	4.191	4.369	4.572
Terminal Height	A1	2.286	2.667	3.30
Molded Package Base Thickness	A2	1.575	–	2.108
Overall Length	D	19.939	20.066	20.193
Molded Package Length	D1	19.050	19.126	19.202
Overall Terminal Spacing	D2	17.53	18.035	18.54
Overall Width	E	19.939	20.066	20.193
Molded Package Width	E1	19.050	19.126	19.202
Overall Terminal Spacing	E2	17.53	18.035	18.54
Terminal Width	b	0.660	–	0.813
Terminal Width	b1	0.330	–	0.533
Terminal Thickness	c	0.246	0.254	0.318
Index Corner Chamfer	CH	1.07	–	1.22
Index Corner Chamfer Height	h	1.07	–	1.42

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

52-Lead Plastic Leadless Chip Carrier – Square (KBB) - 19.1x19.1x4.4 mm Body [PLCC]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

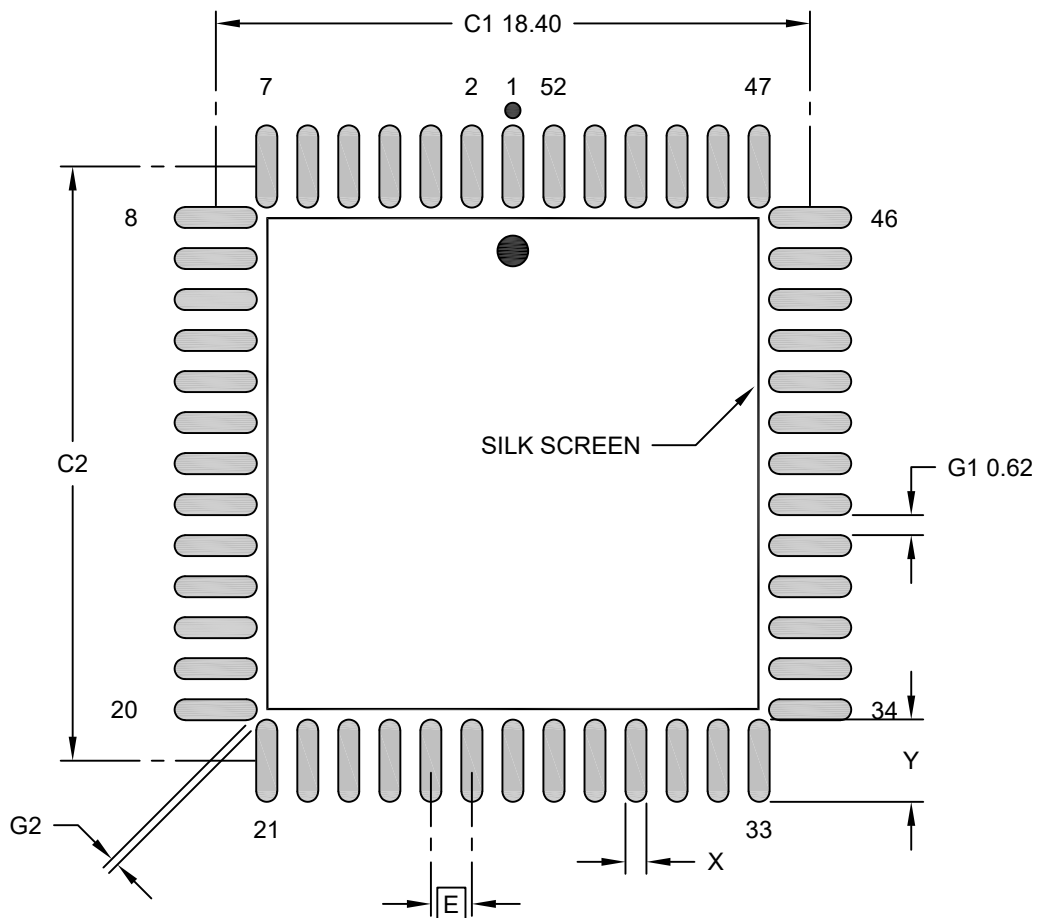

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	1.27 BSC		
Contact Pad Spacing	C1		18.40	
Contact Pad Spacing	C2		18.40	
Contact Pad Width (Xnn)	X			0.65
Contact Pad Length (Xnn)	Y			2.55
Contact Pad to Center Pad (Xnn)	G1	0.62		
Contact Pad to Contact Pad (Xnn)	G2	0.24		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-23289 Rev A