



100-Lead Plastic Quad Flat Pack (KJB) - 14x20 mm Body [PQFP]
Atmel Legacy Global Package Code QCK

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

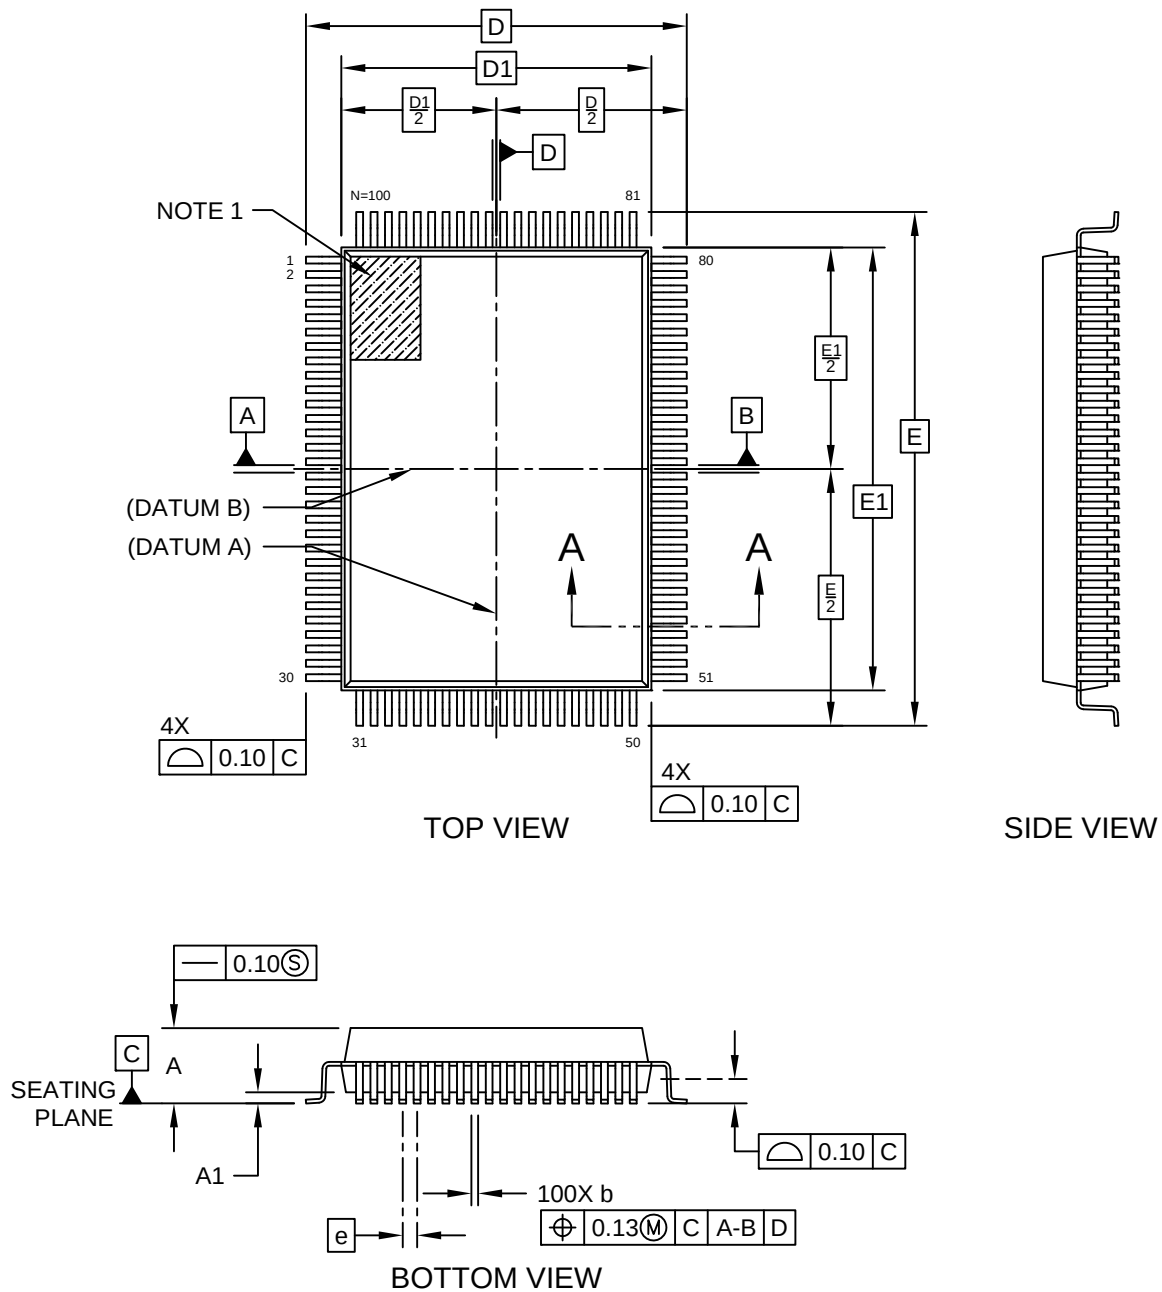

100-Lead Plastic Quad Flat Pack (KJB) - 14x20 mm Body [PQFP]
Atmel Legacy Global Package Code QCK

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

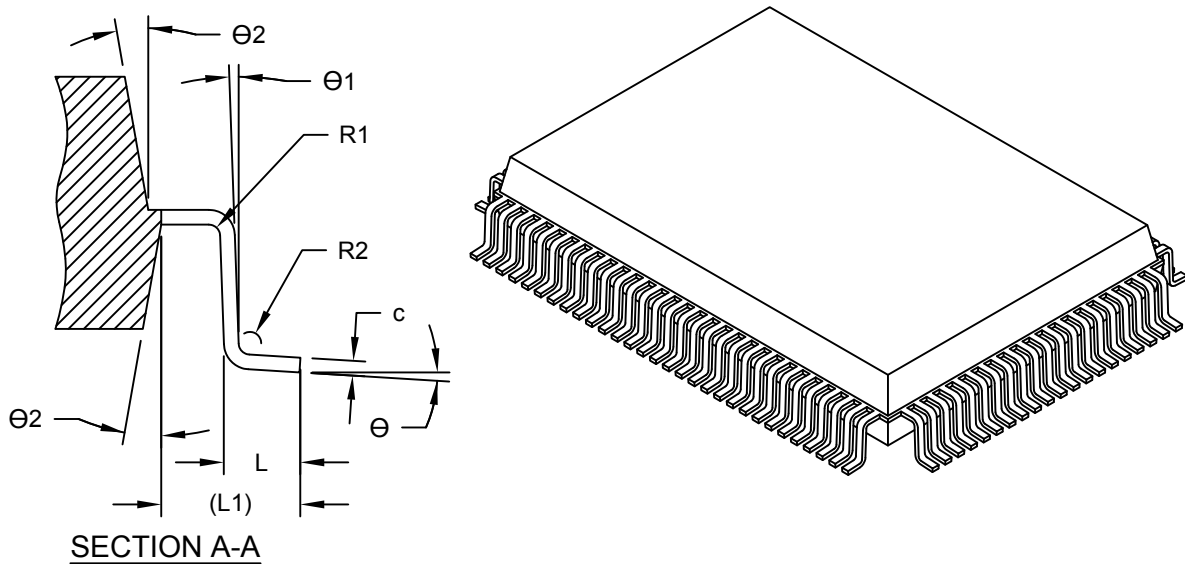


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		100		
Pitch	e		0.65 BSC		
Overall Height	A		-	3.04	3.40
Standoff	A1		0.25	0.33	0.50
Overall Length	D		17.20 BSC		
Molded Package Length	D1		14.00 BSC		
Overall Width	E		23.20 BSC		
Molded Package Width	E1		20.00 BSC		
Terminal Width	b		0.22	-	0.40
Terminal Thickness	c		0.11	-	0.23
Terminal Length	L		0.73	0.88	1.03
Footprint	L1		1.60 REF		
Lead Bend Radius	R1		0.13	-	-
Lead Bend Radius	R2		0.13	-	0.30
Foot Angle	Θ		0°	-	7°
Lead Angle	Θ1		0°	-	-
Mold Draft Angle	Θ2		5°	-	16°

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

100-Lead Plastic Quad Flat Pack (KJB) - 14x20 mm Body [PQFP] Atmel Legacy Global Package Code QCK

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

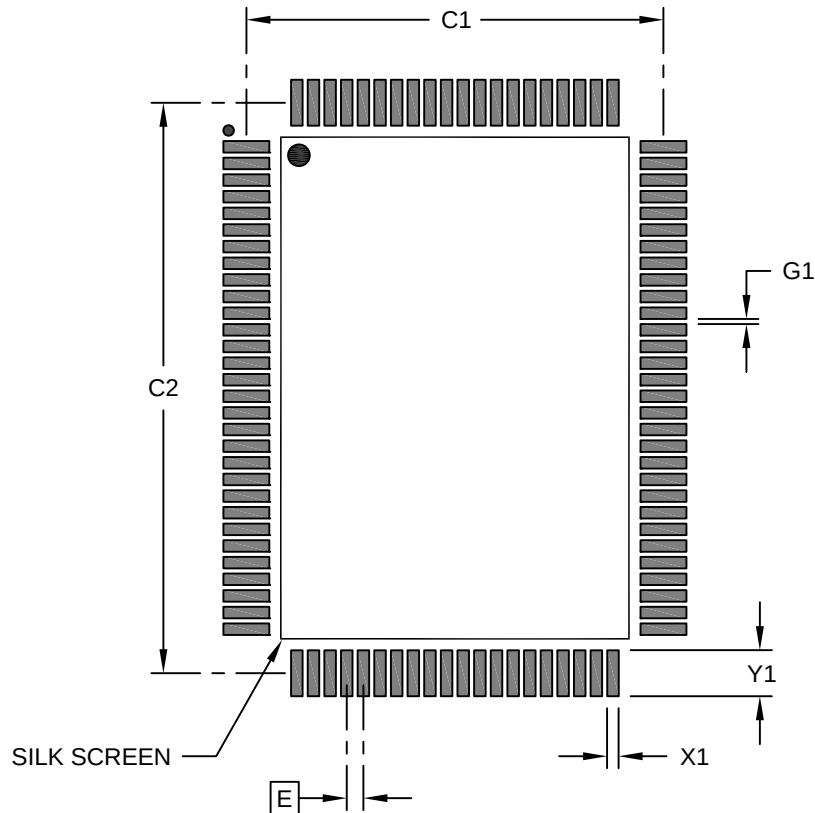

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.65 BSC		
Contact Pad Spacing	C1		16.30	
Contact Pad Spacing	C2		22.30	
Contact Pad Width (X100)	X1			0.45
Contact Pad Length (X100)	Y1			1.80
Contact Pad to Contact Pad (X96)	G1	0.20		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-23292 Rev A