
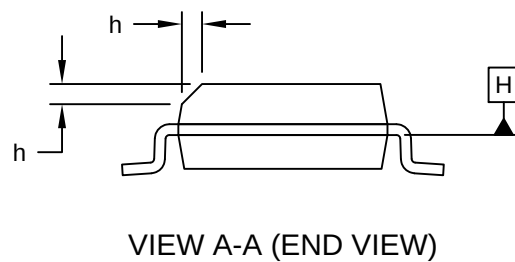
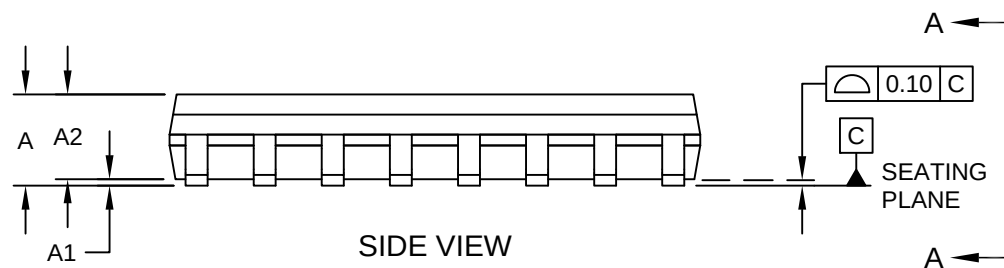



16-Lead Plastic Small Outline Integrated Circuit (M2B) - .150 In. (3.9 mm) Wide [SOIC]
Atmel Legacy Global Package Code SCS

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

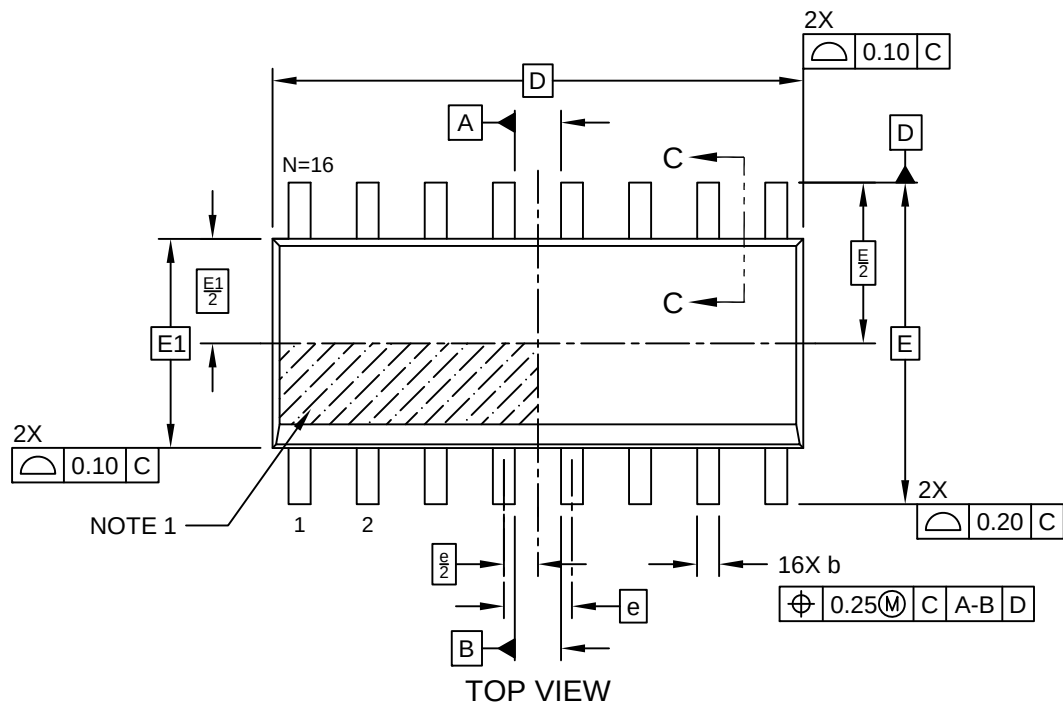

16-Lead Plastic Small Outline Integrated Circuit (M2B) - .150 In. (3.9 mm) Wide [SOIC] Atmel Legacy Global Package Code SCS

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

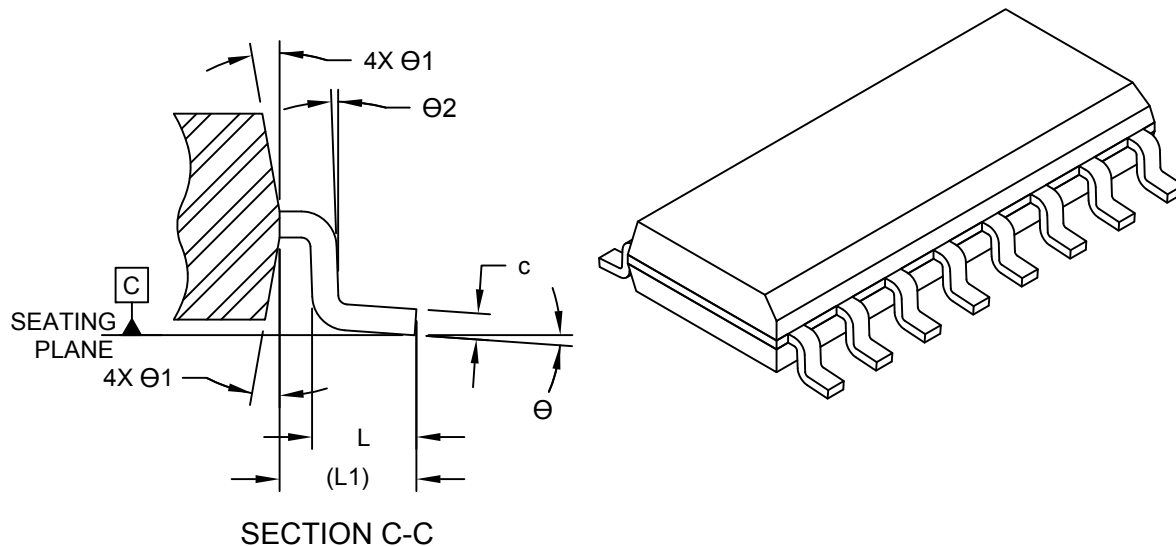


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	16		
Pitch	e	1.27 BSC		
Overall Height	A	-	-	1.70
Standoff	A1	0.10	-	0.25
Molded Package Thickness	A2	1.25	-	-
Overall Length	D	9.90 BSC		
Overall Width	E	6.00 BSC		
Molded Package Width	E1	3.90 BSC		
Terminal Width	b	0.31	-	0.51
Terminal Thickness	c	0.17	-	0.23
Terminal Length	L	0.40	-	1.27
Footprint	L1	1.04 REF		
Chamfer	h	0.25	-	0.50
Terminal Bend Radius	R	0.07	-	-
Terminal Bend Radius	R1	0.07	-	-
Terminal Foot Angle	Θ	0°	-	8°
Mold Draft Angle	Θ1	5°	-	15°
Terminal Angle	Θ2	0°	-	-

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

16-Lead Plastic Small Outline Integrated Circuit (M2B) - .150 In. (3.9 mm) Wide [SOIC] Atmel Legacy Global Package Code SCS

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

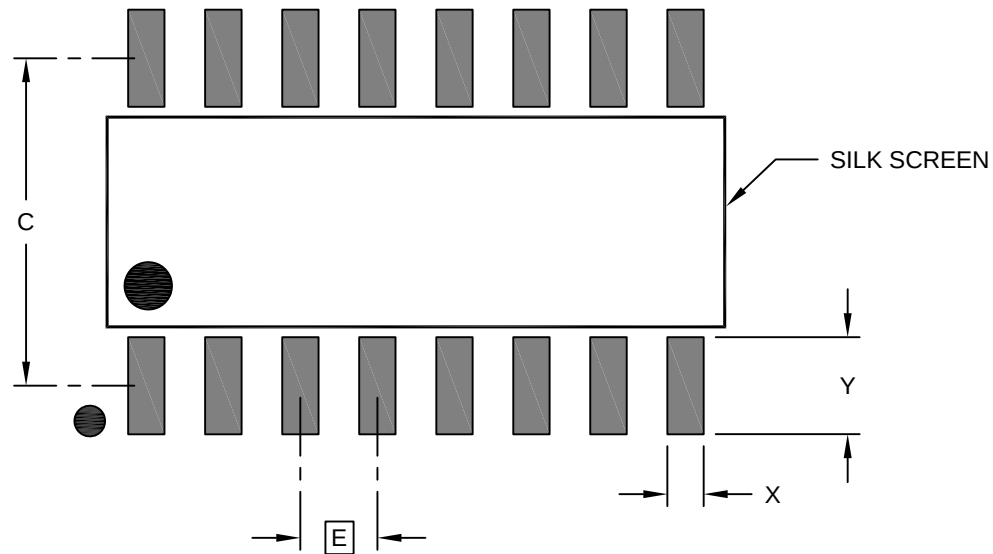

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	1.27 BSC		
Contact Pad Spacing	C		5.40	
Contact Pad Width (X16)	X			0.60
Contact Pad Length (X16)	Y			1.60

Notes:




1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-23317-M2B Rev A


16-Lead Plastic Small Outline Integrated Circuit (MRB) - .150 In. (3.9 mm) Wide [SOIC]
Atmel Legacy Global Package Code SCS

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

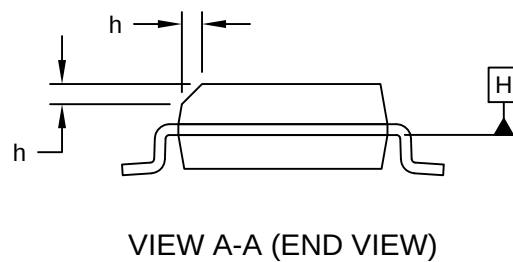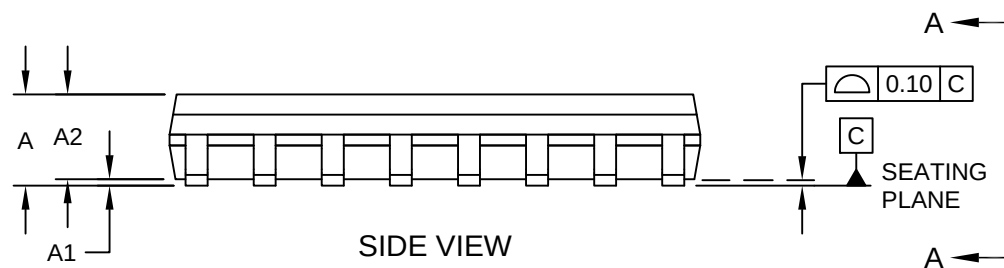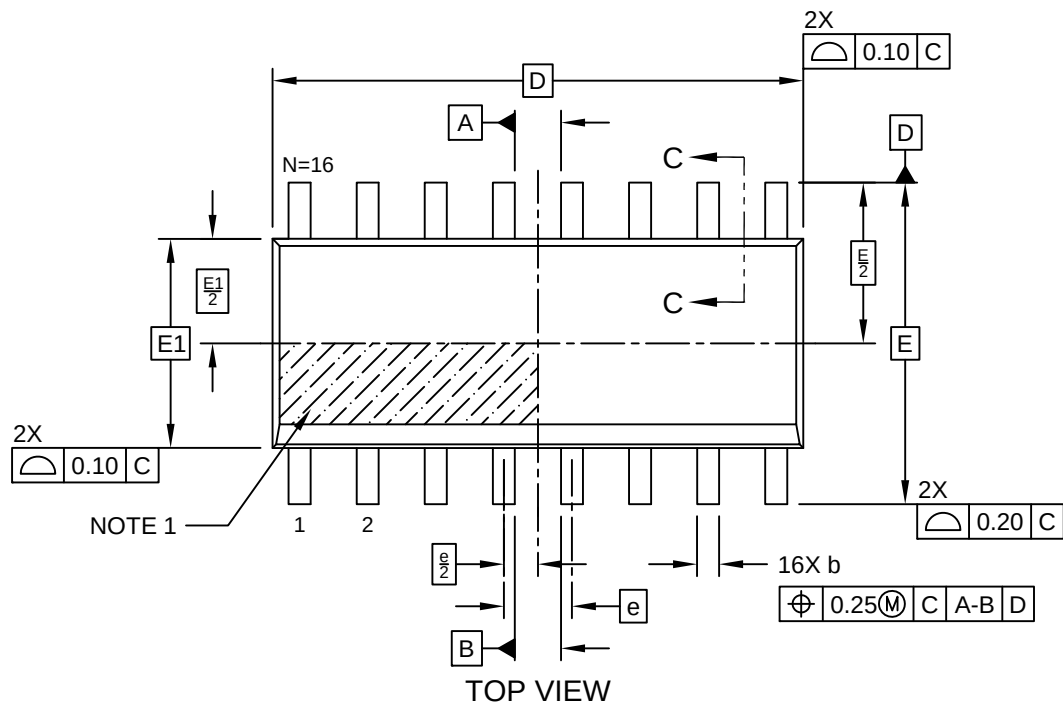

16-Lead Plastic Small Outline Integrated Circuit (MRB) - .150 In. (3.9 mm) Wide [SOIC] Atmel Legacy Global Package Code SCS

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

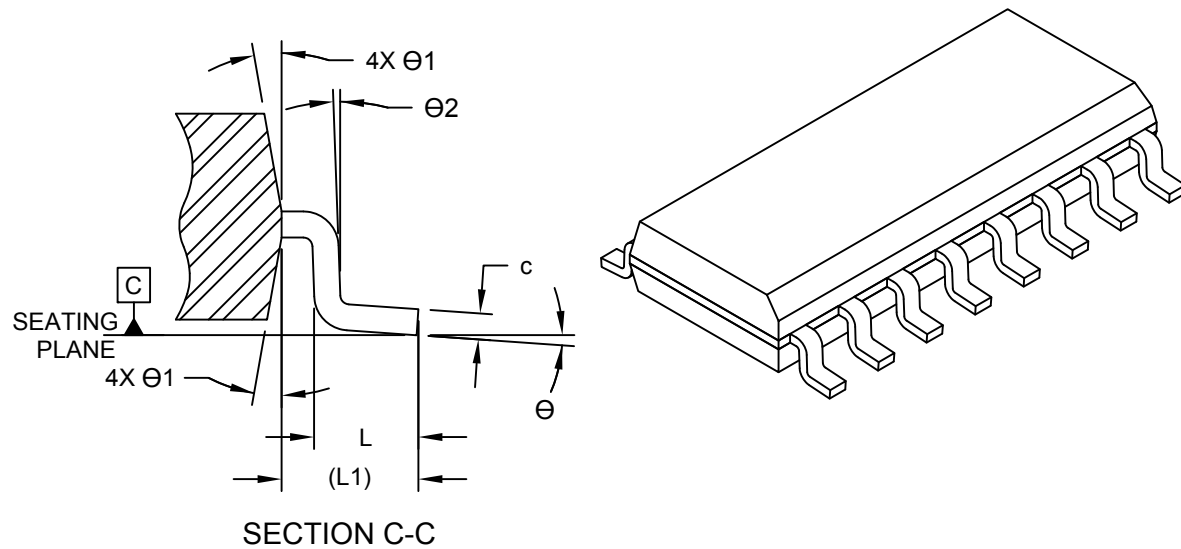


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		16		
Pitch	e		1.27 BSC		
Overall Height	A	-	-	-	1.70
Standoff	A1	0.10	-	-	0.25
Molded Package Thickness	A2	1.25	-	-	-
Overall Length	D		9.90 BSC		
Overall Width	E		6.00 BSC		
Molded Package Width	E1		3.90 BSC		
Terminal Width	b	0.31	-	-	0.51
Terminal Thickness	c	0.17	-	-	0.23
Terminal Length	L	0.40	-	-	1.27
Footprint	L1		1.04 REF		
Chamfer	h	0.25	-	-	0.50
Terminal Bend Radius	R	0.07	-	-	-
Terminal Bend Radius	R1	0.07	-	-	-
Terminal Foot Angle	Θ	0°	-	-	8°
Mold Draft Angle	Θ1	5°	-	-	15°
Terminal Angle	Θ2	0°	-	-	-

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

16-Lead Plastic Small Outline Integrated Circuit (MRB) - .150 In. (3.9 mm) Wide [SOIC] Atmel Legacy Global Package Code SCS

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

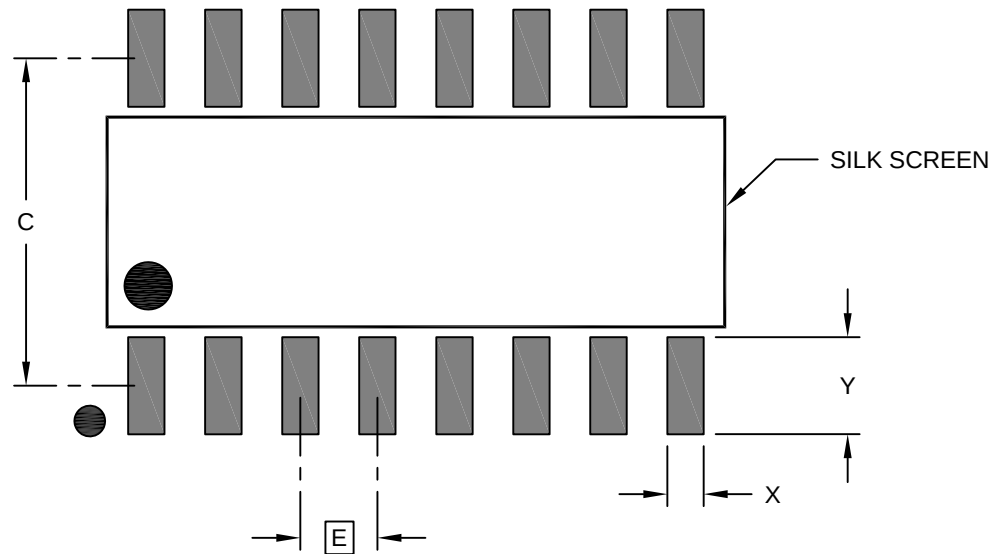

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	1.27 BSC		
Contact Pad Spacing	C		5.40	
Contact Pad Width (X16)	X			0.60
Contact Pad Length (X16)	Y			1.60

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-23317-MRB Rev A