



24-Lead Plastic Small Srink Outline Package (N4B) - .150 In. Body [SSOP] **With .089 x .185 In. Exposed Pad**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

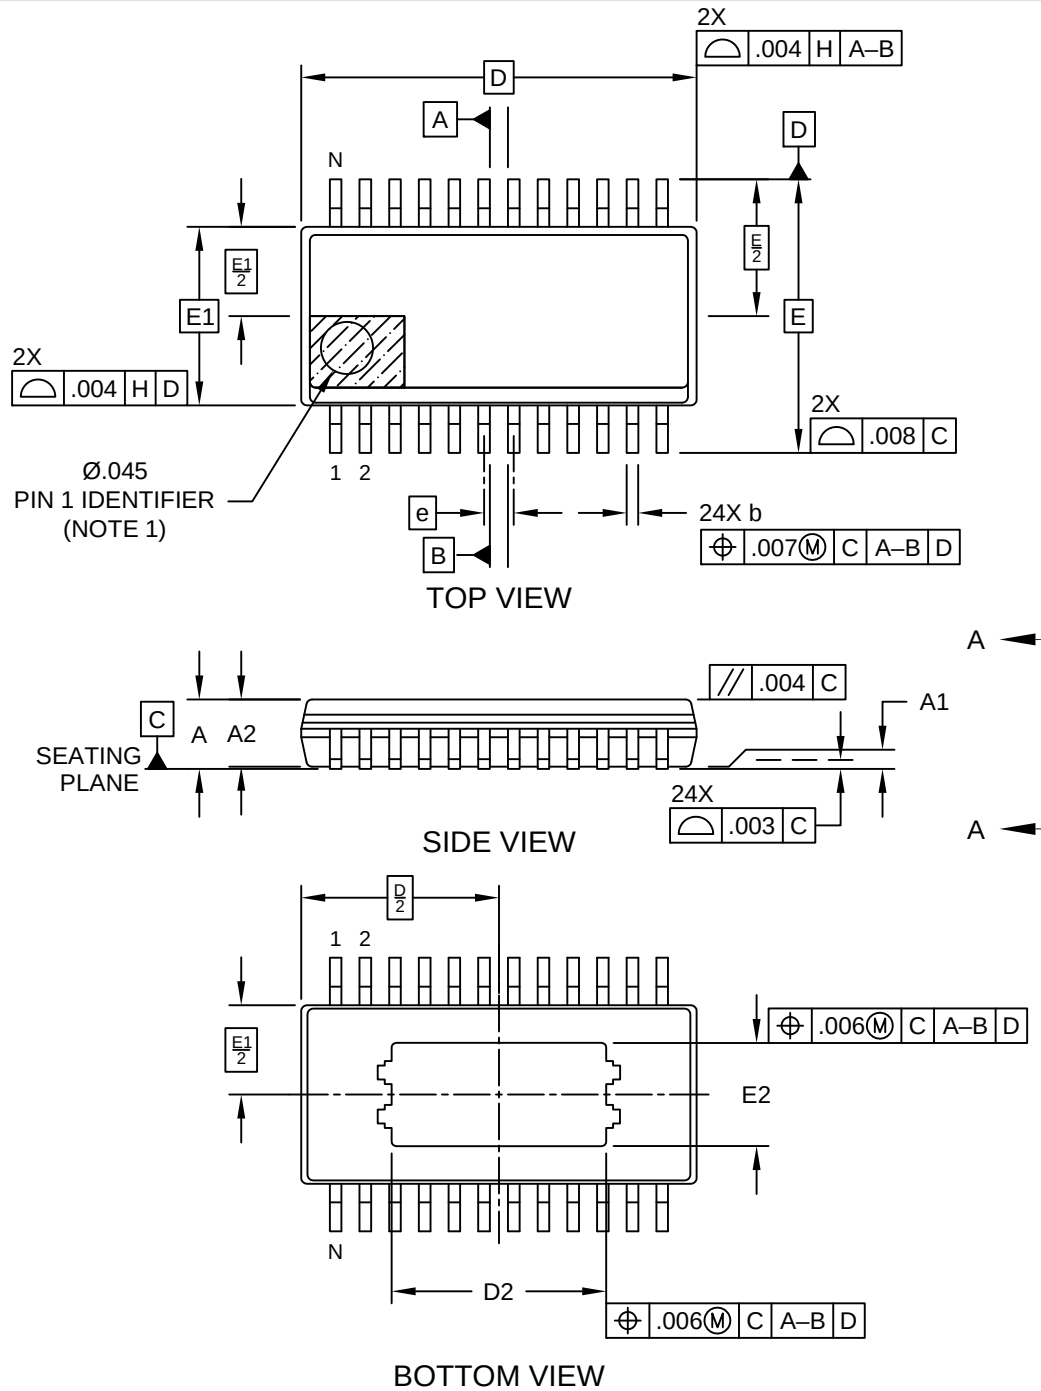

24-Lead Plastic Small Srink Outline Package (N4B) - .150 In. Body [SSOP] With .089 x .185 In. Exposed Pad

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

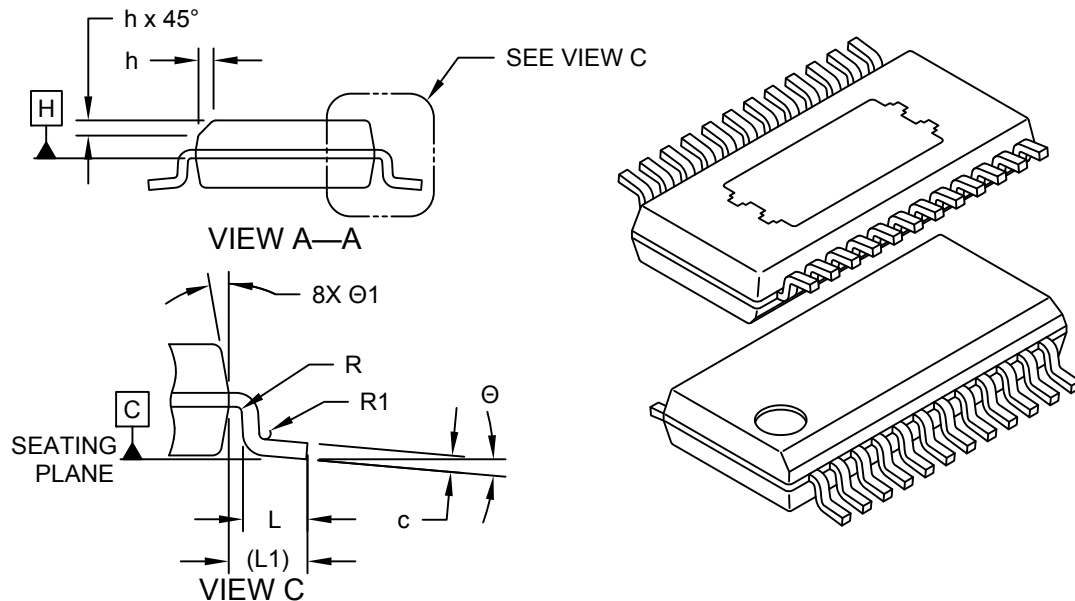


Units		INCHES		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	24		
Pitch	e	.0256 BSC		
Overall Height	A	.055	.060	.065
Standoff	A1	.000	.002	.004
Molded Package Thickness	A2	.055	.058	.061
Overall Length	D	.341 BSC		
Exposed Pad Length	D2	.181	.185	.189
Overall Width	E	.236 BSC		
Molded Package Width	E1	.154 BSC		
Exposed Pad Width	E2	.085	.089	.093
Chamfer (Optional)	h	.010	.013	.016
Terminal Width	b	.008	-	.012
Terminal Height	c	.007	-	.010
Terminal Length	L	.016	.025	.035
Terminal Footprint	L1	.041 REF		
Terminal Bend Radius	R	.003	-	-
Terminal Bend Radius	R1	.003	-	-
Terminal Foot Angle	Ø	0°	5°	8°
Mold Draft Angle	Ø1	5°	-	15°

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

24-Lead Plastic Small Srink Outline Package (N4B) - .150 In. Body [SSOP] With .089 x .185 In. Exposed Pad

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

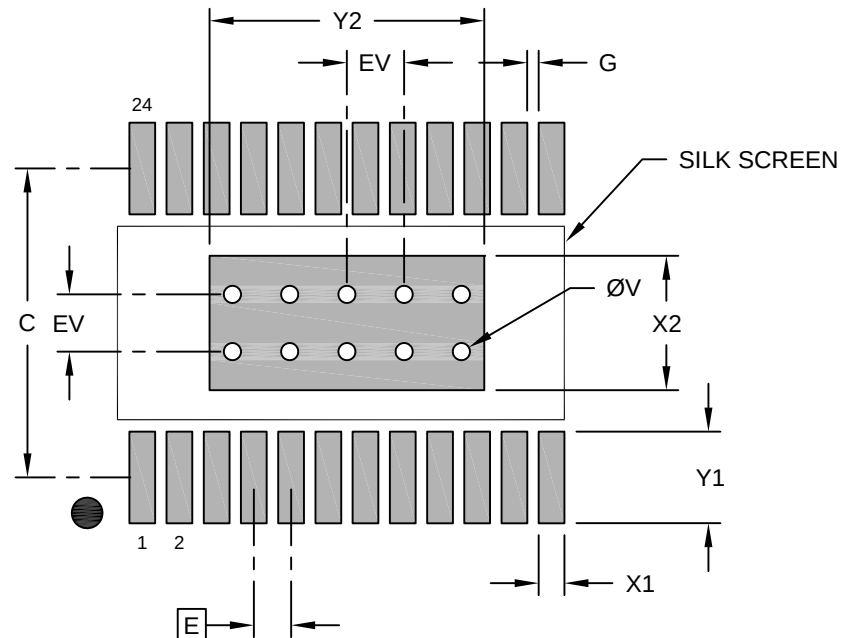

RECOMMENDED LAND PATTERN

Units		INCHES		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	.0256 BSC		
Optional Center Pad Width	X2			.093
Optional Center Pad Length	Y2			.189
Contact Pad Spacing	C		.213	
Contact Pad Width (X24)	X1			.018
Contact Pad Length (X24)	Y1			.063
Contact Pad to Contact Pad (X22)	G	.008		
Thermal Via Diameter	V		.012	
Thermal Via Pitch	EV		.039	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-23331 Rev A