



# **8-Lead Very, Very Thin Dual Flat, No Lead Package (QEB) - 2x3x0.8 mm Body [WDFN]** **Atmel Legacy Global Package Code YDL**

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

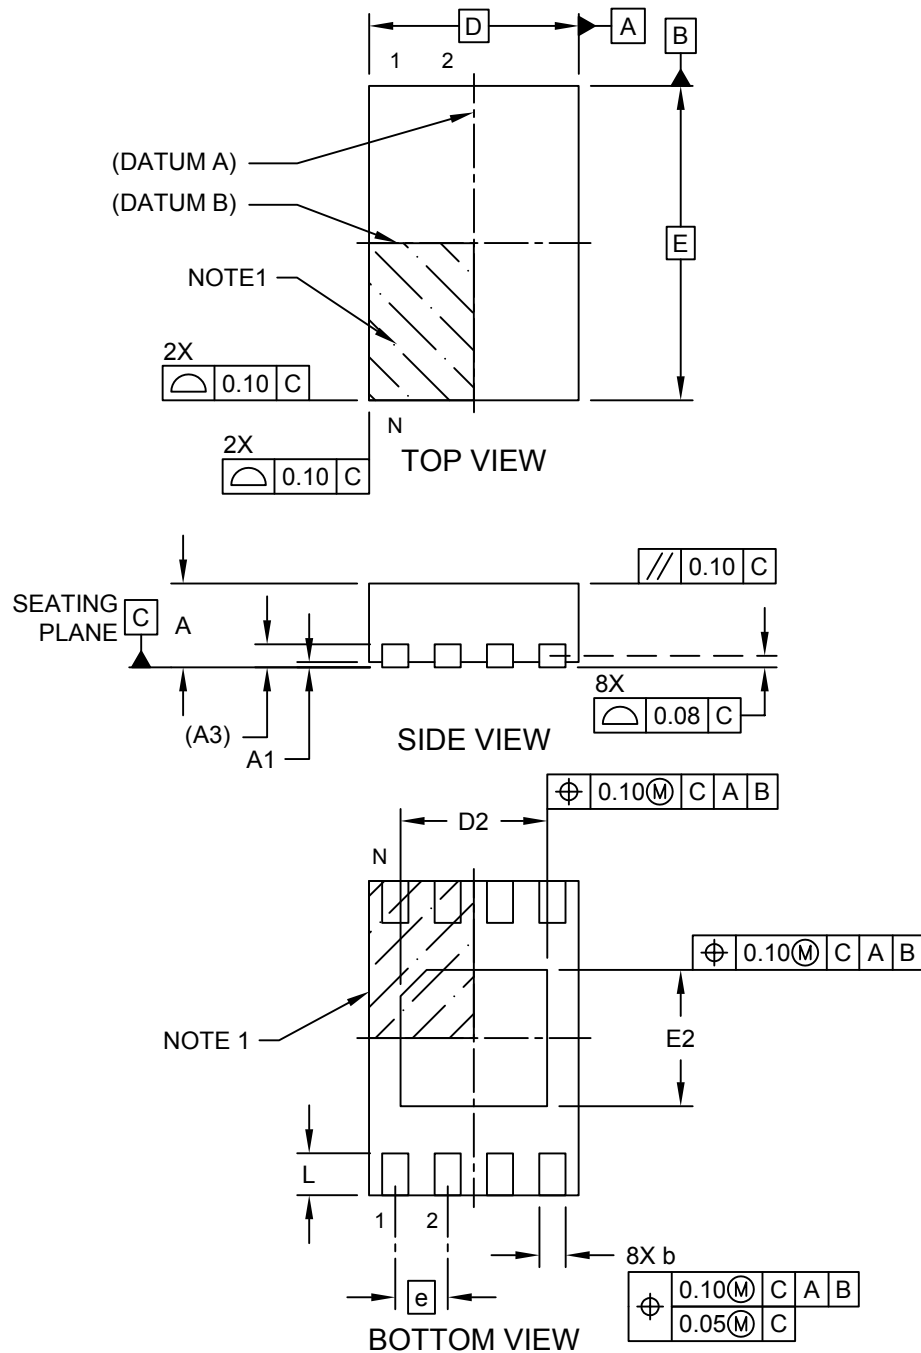

## 8-Lead Very, Very Thin Dual Flat, No Lead Package (QEB) - 2x3x0.8 mm Body [WDFN] Atmel Legacy Global Package Code YDL

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

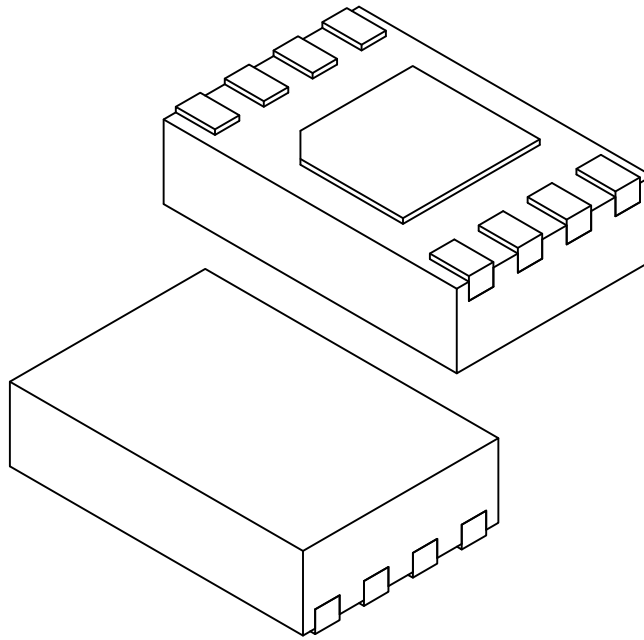


| Dimension Limits    | Units | MILLIMETERS |      |      |
|---------------------|-------|-------------|------|------|
|                     |       | MIN         | NOM  | MAX  |
| Number of Terminals | N     | 8           |      |      |
| Pitch               | e     | 0.50 BSC    |      |      |
| Overall Height      | A     | 0.70        | 0.75 | 0.80 |
| Standoff            | A1    | 0.00        | 0.02 | 0.05 |
| Terminal Thickness  | A3    | 0.20 REF    |      |      |
| Overall Length      | D     | 2.00 BSC    |      |      |
| Exposed Pad Length  | D2    | 1.35        | 1.40 | 1.45 |
| Overall Width       | E     | 3.00 BSC    |      |      |
| Exposed Pad Width   | E2    | 1.25        | 1.30 | 1.35 |
| Terminal Width      | b     | 0.18        | 0.25 | 0.30 |
| Terminal Length     | L     | 0.35        | 0.40 | 0.45 |

**Notes:**

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.  
REF: Reference Dimension, usually without tolerance, for information purposes only.

# 8-Lead Very, Very Thin Dual Flat, No Lead Package (QEB) - 2x3x0.8 mm Body [WDFN] Atmel Legacy Global Package Code YDL

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

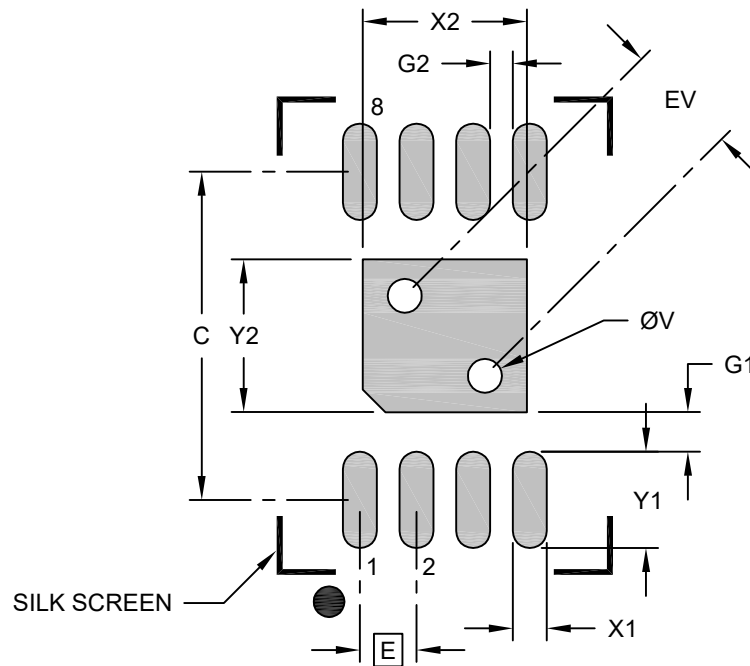

## RECOMMENDED LAND PATTERN

| Units                            |    | MILLIMETERS |      |      |
|----------------------------------|----|-------------|------|------|
| Dimension Limits                 |    | MIN         | NOM  | MAX  |
| Contact Pitch                    | E  | 0.50        |      |      |
| Center Pad Width                 | X2 |             |      | 1.45 |
| Center Pad Length                | Y2 |             |      | 1.35 |
| Contact Pad Spacing              | C  |             | 2.90 |      |
| Contact Pad Width (Xnn)          | X1 |             |      | 0.30 |
| Contact Pad Length (Xnn)         | Y1 |             |      | 0.85 |
| Contact Pad to Center Pad (Xnn)  | G1 | 0.35        |      |      |
| Contact Pad to Contact Pad (Xnn) | G2 | 0.20        |      |      |
| Thermal Via Diameter             | V  |             | 0.30 |      |
| Thermal Via Pitch                | EV |             | 1.00 |      |

### Notes:

- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-23364 Rev A