



# **38-Lead Very Thin Plastic Quad Flat, No Lead Package (SJB) - 5x7x1.0 mm Body [VQFN]** **With Stepped Wettable Flanks**

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

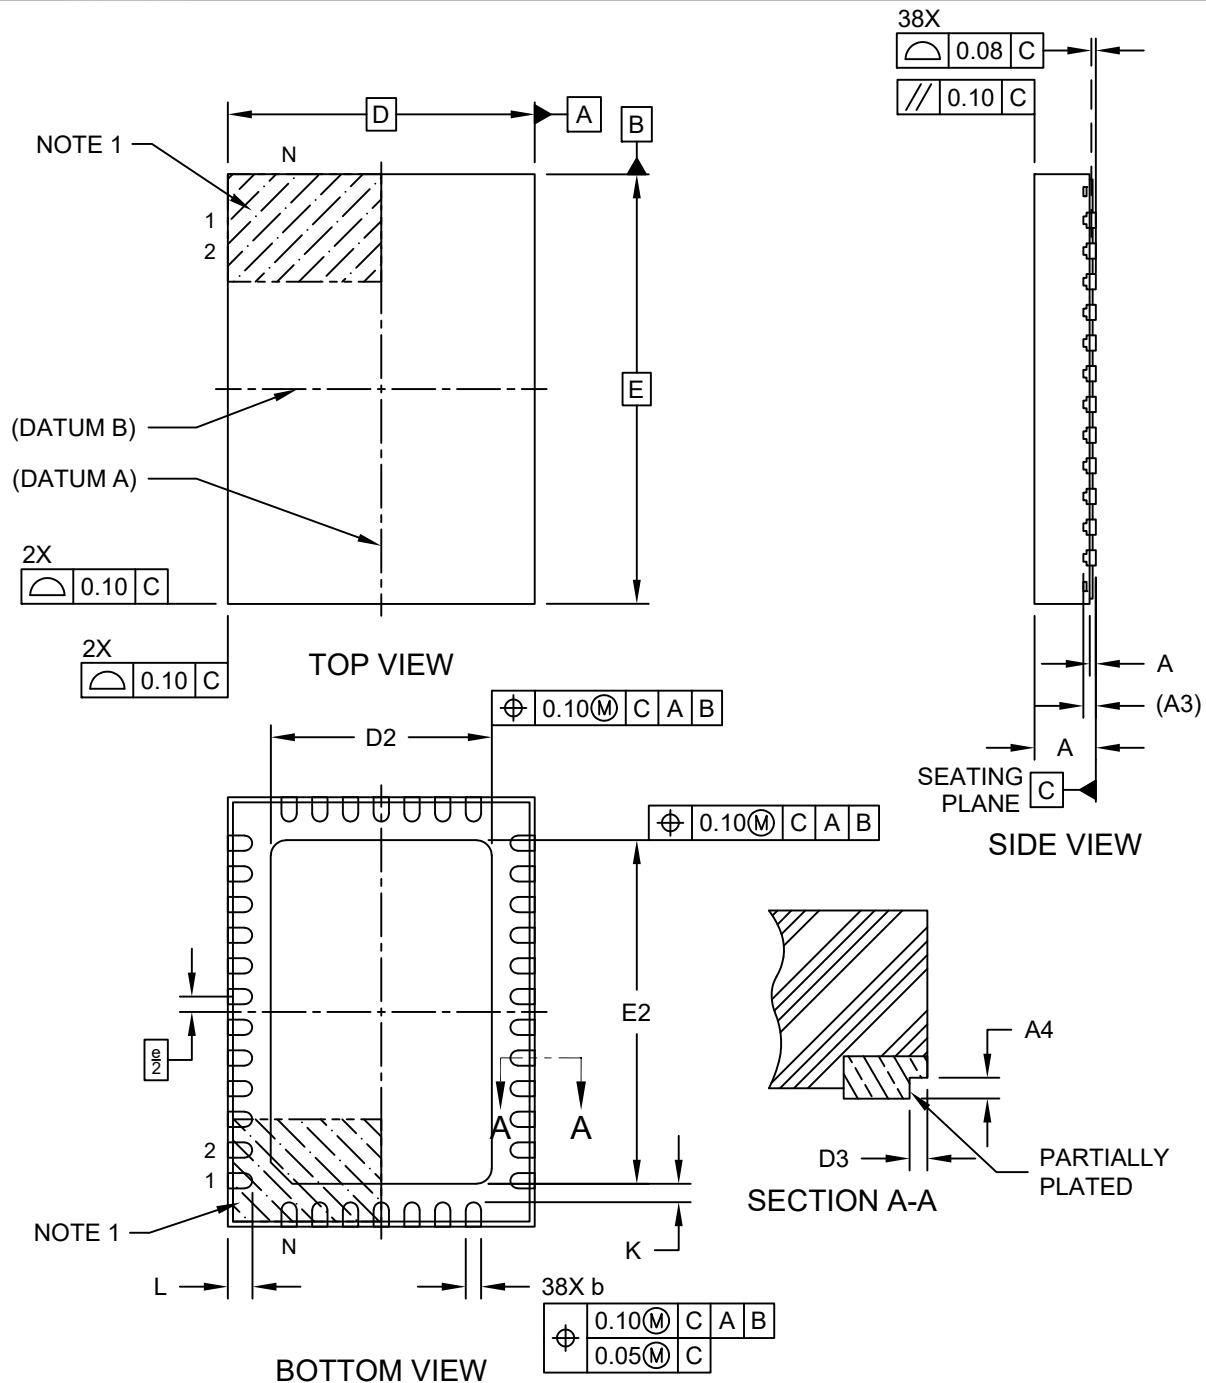

### 38-Lead Very Thin Plastic Quad Flat, No Lead Package (SJB) - 5x7x1.0 mm Body [VQFN] With Stepped Wettable Flanks

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

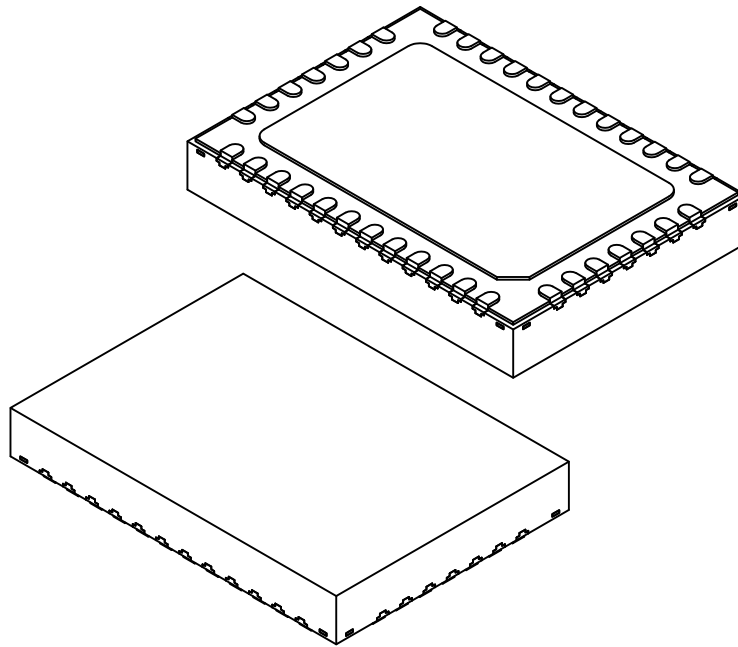


|                            |    | Units | MILLIMETERS |       |       |
|----------------------------|----|-------|-------------|-------|-------|
| Dimension Limits           |    |       | MIN         | NOM   | MAX   |
| Number of Terminals        | N  |       | 38          |       |       |
| Pitch                      | e  |       | 0.50 BSC    |       |       |
| Overall Height             | A  |       | 0.80        | 0.90  | 1.00  |
| Standoff                   | A1 |       | 0.00        | 0.035 | 0.05  |
| Terminal Thickness         | A3 |       | 0.203 REF   |       |       |
| Overall Length             | D  |       | 5.00 BSC    |       |       |
| Exposed Pad Length         | D2 |       | 3.50        | 3.60  | 3.70  |
| Overall Width              | E  |       | 7.00 BSC    |       |       |
| Exposed Pad Width          | E2 |       | 5.50        | 5.60  | 5.70  |
| Terminal Width             | b  |       | 0.20        | 0.25  | 0.30  |
| Terminal Length            | L  |       | 0.35        | 0.40  | 0.45  |
| Terminal-to-Exposed-Pad    | K  |       | 0.20        | -     | -     |
| Wettable Flank Step Length | D3 |       | -           | -     | 0.085 |
| Wettable Flank Step Height | A4 |       | 0.10        | -     | 0.19  |

**Notes:**

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
  - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
  - REF: Reference Dimension, usually without tolerance, for information purposes only.

### 38-Lead Very Thin Plastic Quad Flat, No Lead Package (SJB) - 5x7x1.0 mm Body [VQFN] With Stepped Wettable Flanks

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

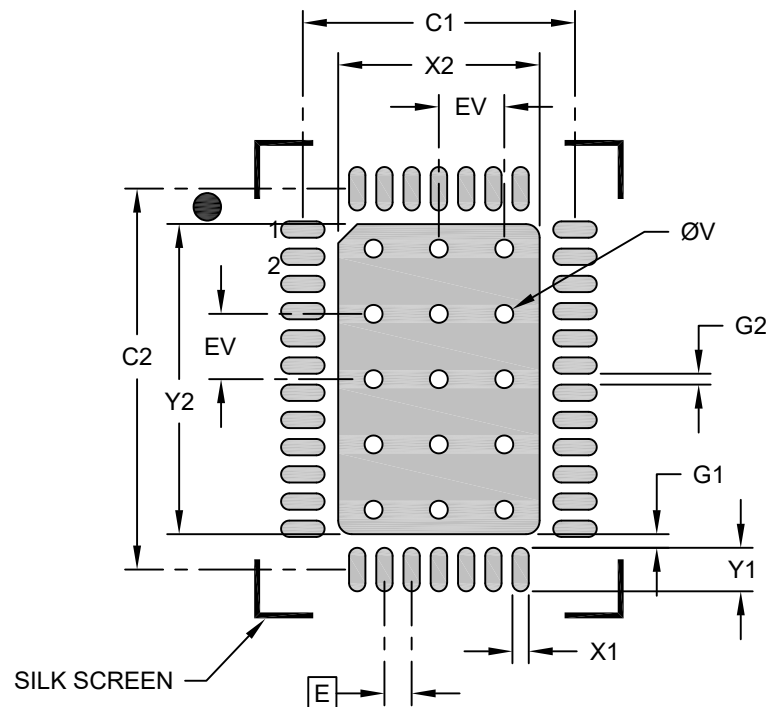

#### RECOMMENDED LAND PATTERN

| Units                            |    | MILLIMETERS |      |      |
|----------------------------------|----|-------------|------|------|
| Dimension Limits                 |    | MIN         | NOM  | MAX  |
| Contact Pitch                    | E  | 0.50 BSC    |      |      |
| Optional Center Pad Width        | X2 |             |      | 3.70 |
| Optional Center Pad Length       | Y2 |             |      | 5.70 |
| Contact Pad Spacing              | C1 |             | 5.00 |      |
| Contact Pad Spacing              | C2 |             | 7.00 |      |
| Contact Pad Width (Xnn)          | X1 |             |      | 0.30 |
| Contact Pad Length (Xnn)         | Y1 |             |      | 0.80 |
| Contact Pad to Center Pad (Xnn)  | G1 | 0.25        |      |      |
| Contact Pad to Contact Pad (Xnn) | G2 | 0.20        |      |      |
| Thermal Via Diameter             | V  |             | 0.33 |      |
| Thermal Via Pitch                | EV |             | 1.20 |      |

**Notes:**

- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-23411 Rev B