



**32-Lead Very Thin Plastic Quad Flat, No Lead Package (SQB) - 7x7x0.9 mm Body [VQFN]
With 4.7x4.7 mm Exposed Pad, Dimpled Wettable Flank; Atmel Legacy GPC ZQK**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

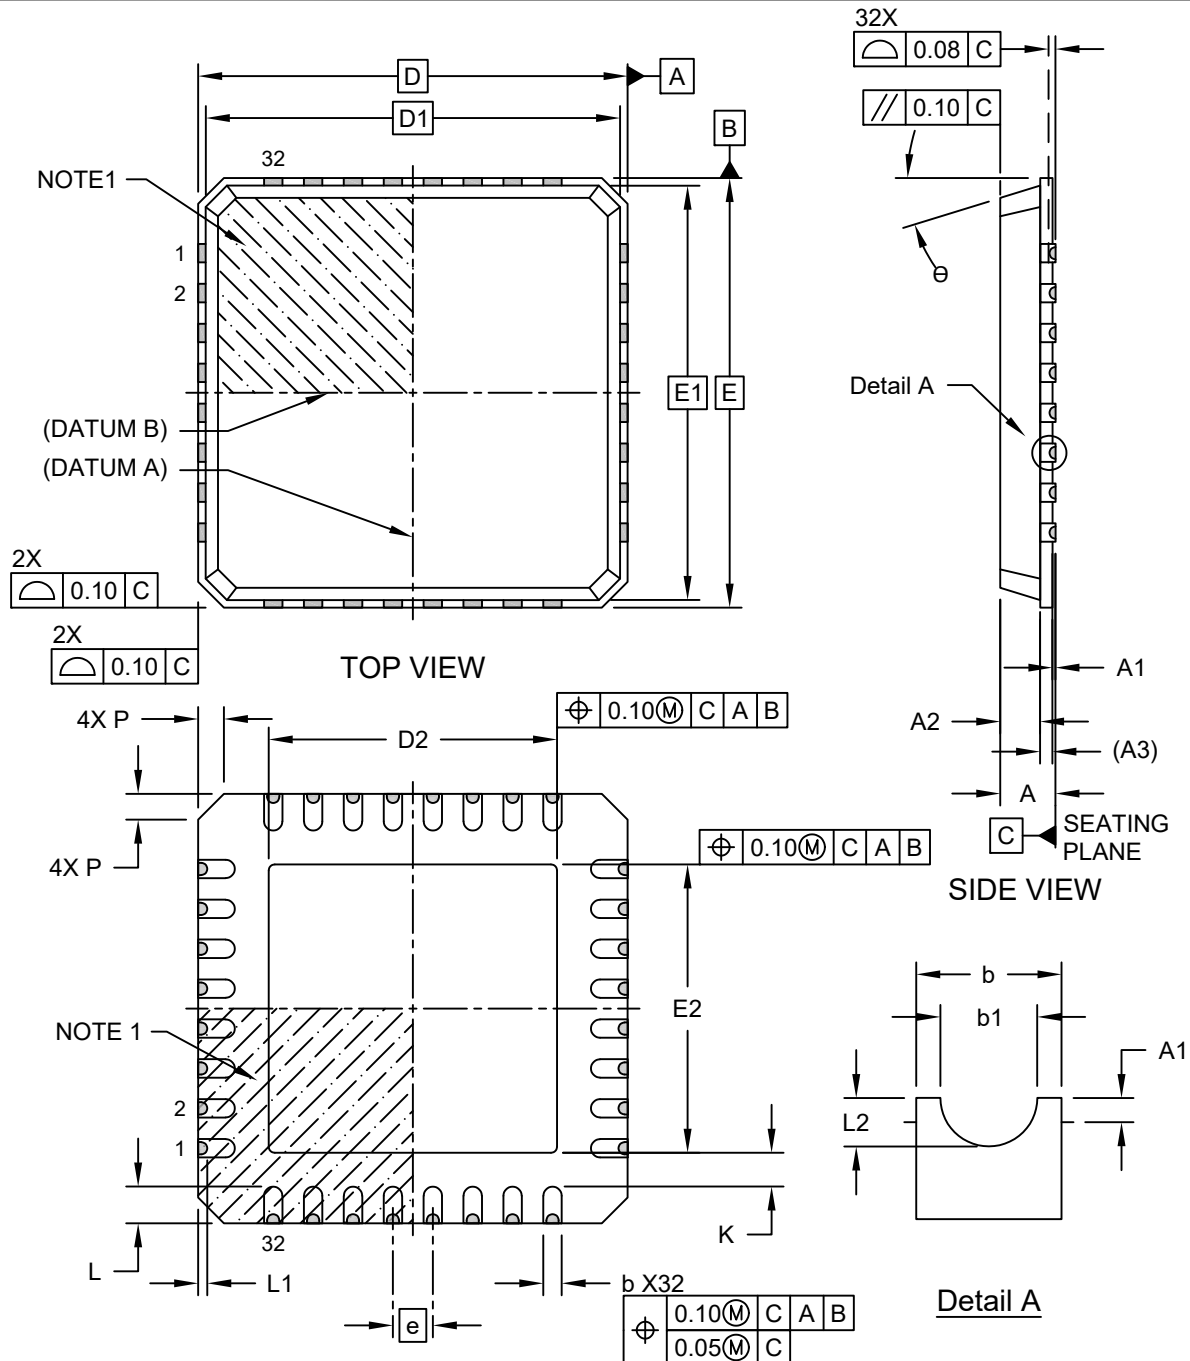

**32-Lead Very Thin Plastic Quad Flat, No Lead Package (SQB) - 7x7x0.9 mm Body [VQFN]
With 4.7x4.7 mm Exposed Pad, Dimpled Wettable Flank; Atmel Legacy GPC ZQK**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

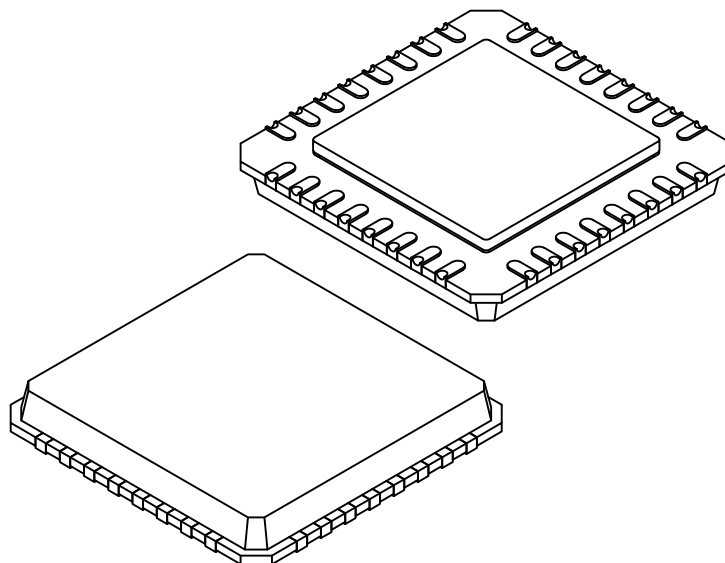


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		32		
Pitch	e		0.65 BSC		
Overall Height	A		0.80	0.85	0.90
Standoff	A1		0.00	0.01	0.05
Terminal Thickness	A3		0.20 REF		
Overall Length	D		7.00 BSC		
Mold Cap Length	D1		6.75 BSC		
Exposed Pad Length	D2		4.60	4.70	4.80
Overall Width	E		7.00 BSC		
Mold Cap Width	E1		6.75 BSC		
Exposed Pad Width	E2		4.60	4.70	4.80
Terminal Width	b		0.25	0.30	0.35
Dimple Width	b1		0.15	0.20	0.25
Terminal Length	L		0.50	0.60	0.70
Dimple Length	L1		0.05	0.15	0.25
Dimple Depth	L2		0.05	0.10	0.15
Terminal-to-Exposed-Pad	K		0.55 REF		
Chamfer	P		0.24	0.42	0.60
Mold Cap Angle	Θ		0°	-	12°

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is punch singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

**32-Lead Very Thin Plastic Quad Flat, No Lead Package (SQB) - 7x7x0.9 mm Body [VQFN]
With 4.7x4.7 mm Exposed Pad, Dimpled Wettable Flank; Atmel Legacy GPC ZQK**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

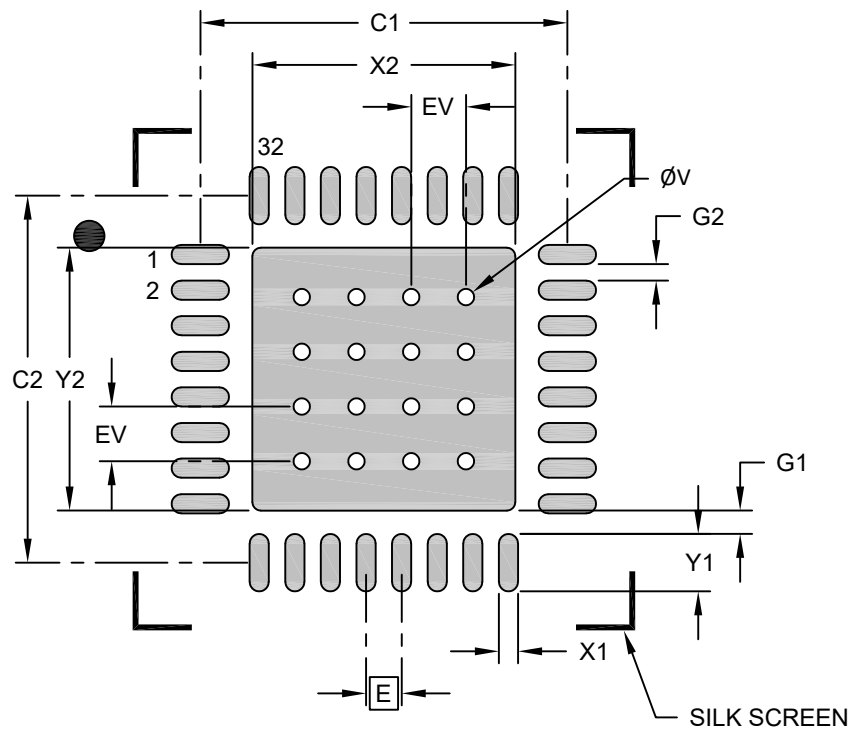

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.65 BSC		
Optional Center Pad Width	X2			4.80
Optional Center Pad Length	Y2			4.80
Contact Pad Spacing	C1		6.70	
Contact Pad Spacing	C2		6.70	
Contact Pad Width (Xnn)	X1			0.35
Contact Pad Length (Xnn)	Y1			1.05
Contact Pad to Center Pad (Xnn)	G1	0.43		
Contact Pad to Contact Pad (Xnn)	G2	0.30		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	


Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-23417 Rev B


**32-Lead Very Thin Plastic Quad Flat, No Lead Package (SQB) - 7x7x0.9 mm Body [VQFN]
With 4.7x4.7 mm Exposed Pad, Dimpled Wettable Flank and Edge Protection Technology**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

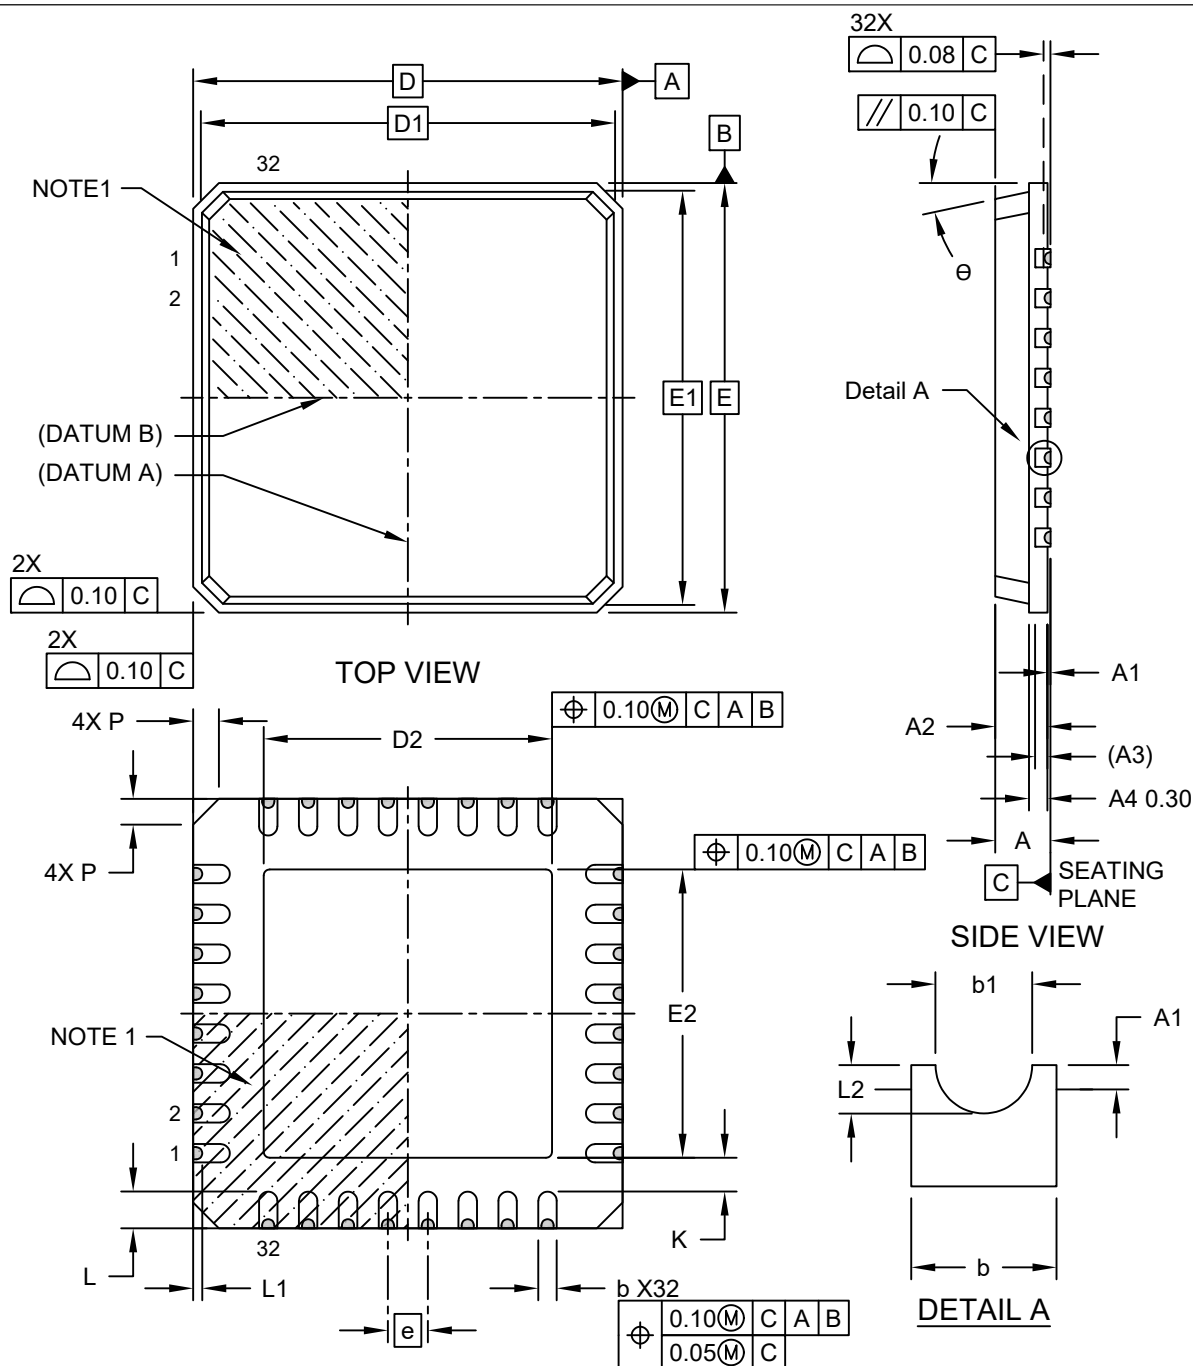

32-Lead Very Thin Plastic Quad Flat, No Lead Package (SQB) - 7x7x0.9 mm Body [VQFN] With 4.7x4.7 mm Exposed Pad, Dimpled Wettable Flank and Edge Protection Technology

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

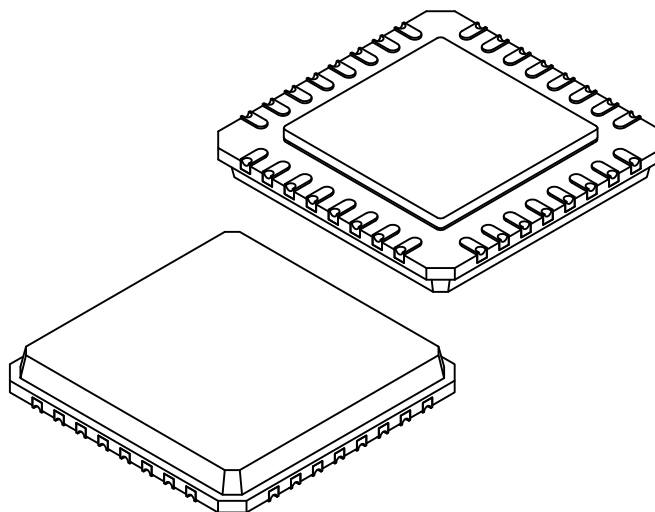


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	32		
Pitch	e	0.65 BSC		
Overall Height	A	0.80	0.85	0.90
Standoff	A1	0.00	0.01	0.05
Terminal Thickness	A3	0.20 REF		
Base Thickness	A4	0.30 REF		
Overall Length	D	7.00 BSC		
Mold Cap Length	D1	6.71 BSC		
Exposed Pad Length	D2	4.60	4.70	4.80
Overall Width	E	7.00 BSC		
Mold Cap Width	E1	6.71 BSC		
Exposed Pad Width	E2	4.60	4.70	4.80
Terminal Width	b	0.25	0.30	0.35
Dimple Width	b1	0.15	0.20	0.25
Terminal Length	L	0.50	0.60	0.70
Dimple Length	L1	0.05	0.15	0.25
Dimple Depth	L2	0.05	0.10	0.15
Terminal-to-Exposed-Pad	K	0.55 REF		
Chamfer	P	0.24	0.42	0.60
Mold Cap Angle	Θ	0°	-	12°

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is punch singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

**32-Lead Very Thin Plastic Quad Flat, No Lead Package (SQB) - 7x7x0.9 mm Body [VQFN]
With 4.7x4.7 mm Exposed Pad, Dimpled Wetable Flank and Edge Protection Technology**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

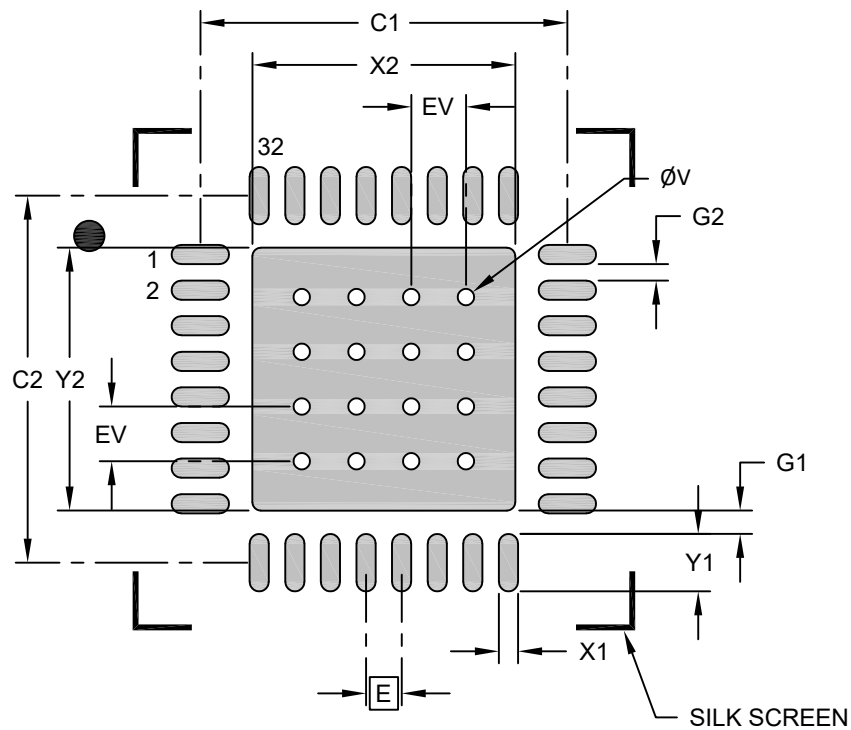

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.65 BSC		
Optional Center Pad Width	X2			4.80
Optional Center Pad Length	Y2			4.80
Contact Pad Spacing	C1		6.70	
Contact Pad Spacing	C2		6.70	
Contact Pad Width (Xnn)	X1			0.35
Contact Pad Length (Xnn)	Y1			1.05
Contact Pad to Center Pad (Xnn)	G1	0.43		
Contact Pad to Contact Pad (Xnn)	G2	0.30		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-23417-EPT Rev B