



625-Terminal Ceramic Land Grid Array (DNB) - 29x29x4.29 mm Body [CLGA] With Two-Step Lid

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

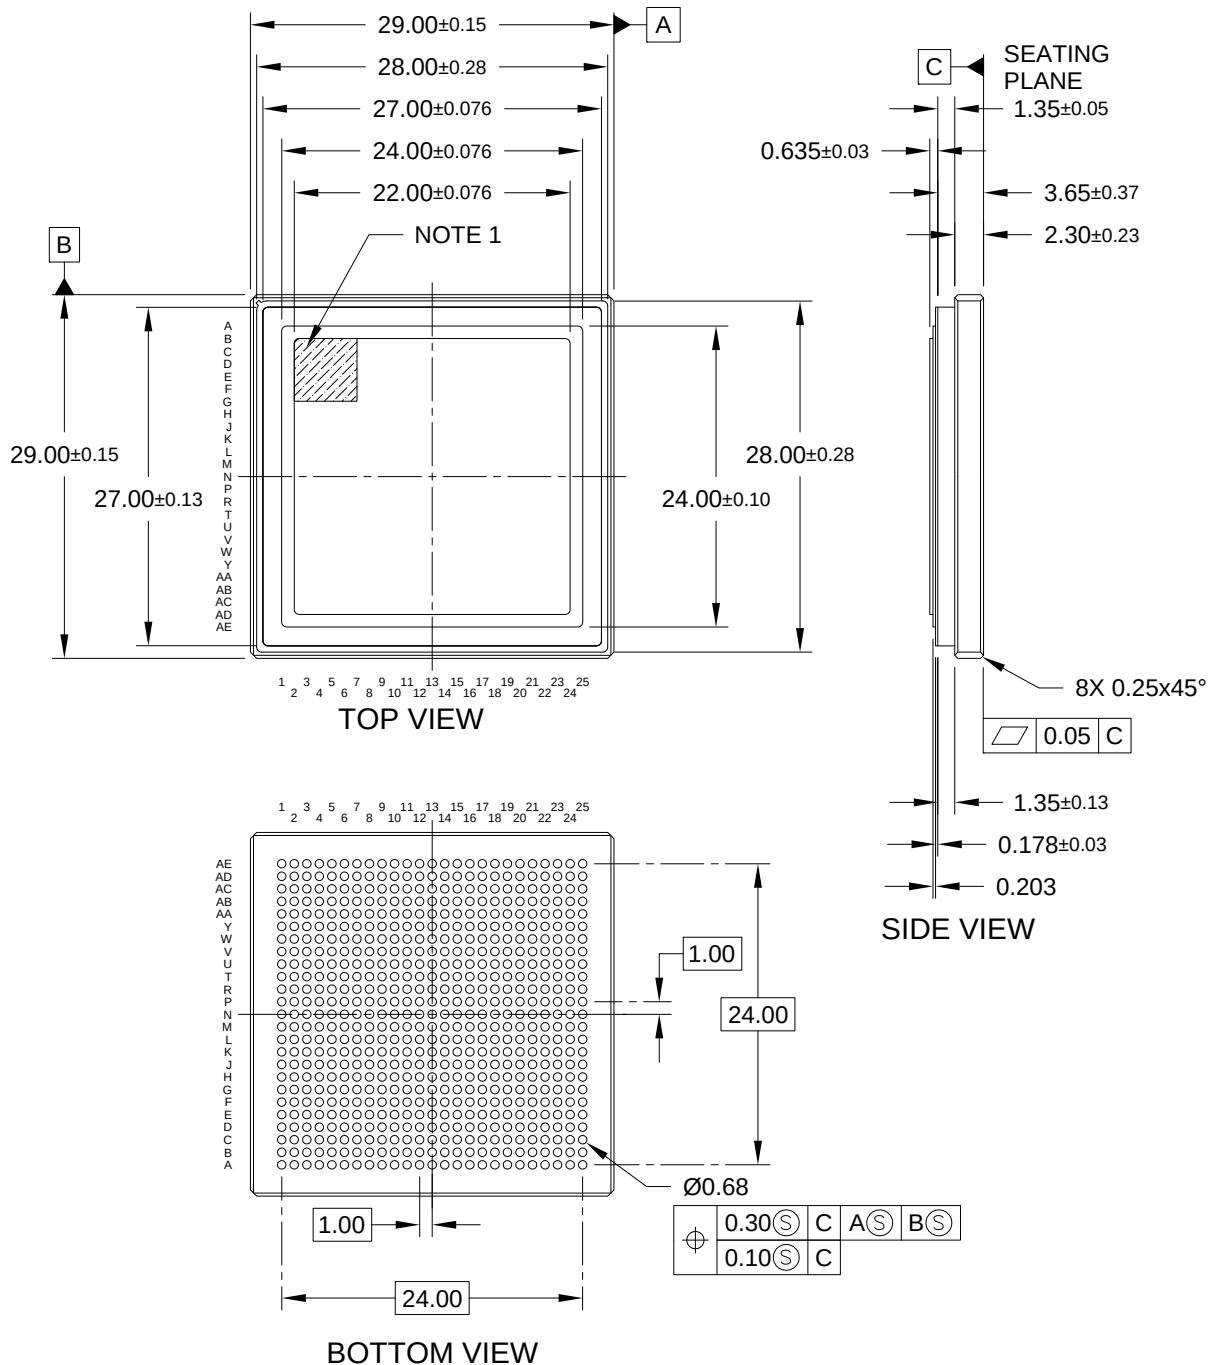

**625-Terminal Ceramic Land Grid Array (DNB) - 29x29x4.29 mm Body [CLGA]
With Two-Step Lid**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

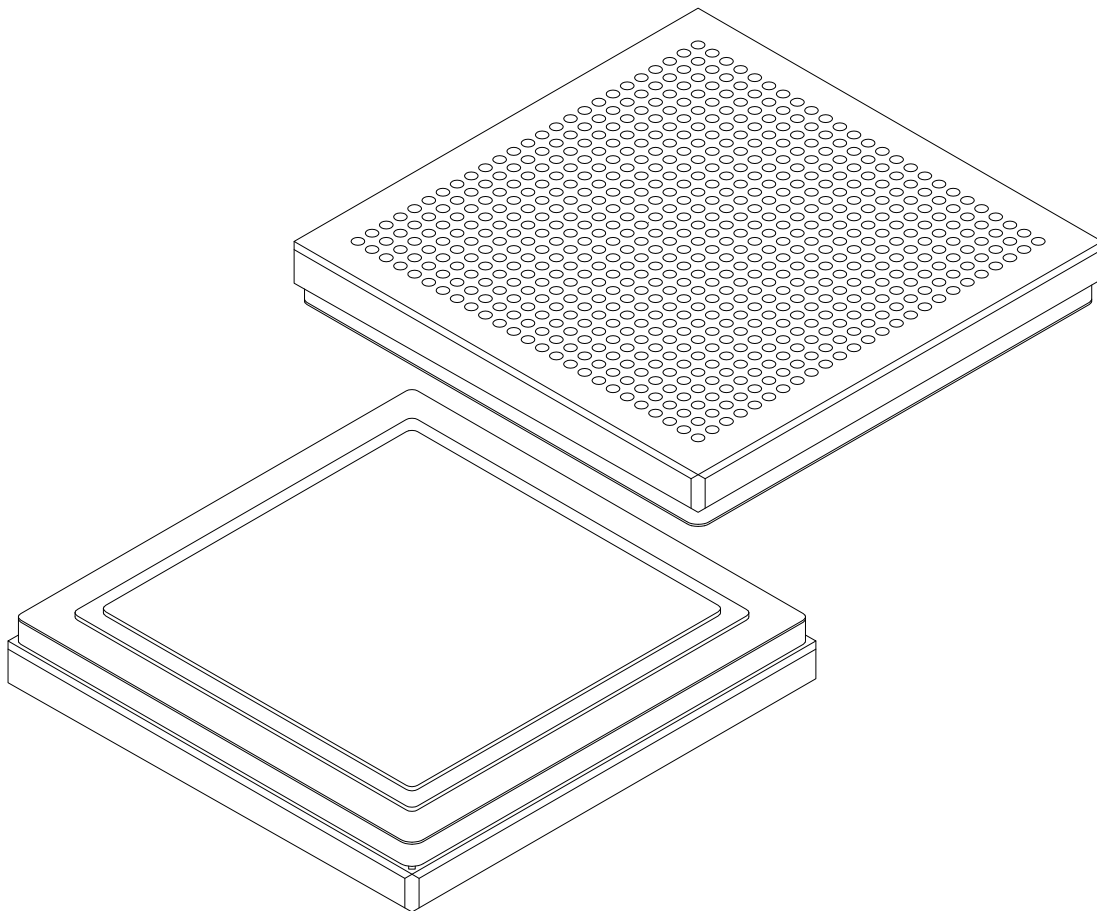


Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.

625-Terminal Ceramic Land Grid Array (DNB) - 29x29x4.29 mm Body [CLGA] With Two-Step Lid

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

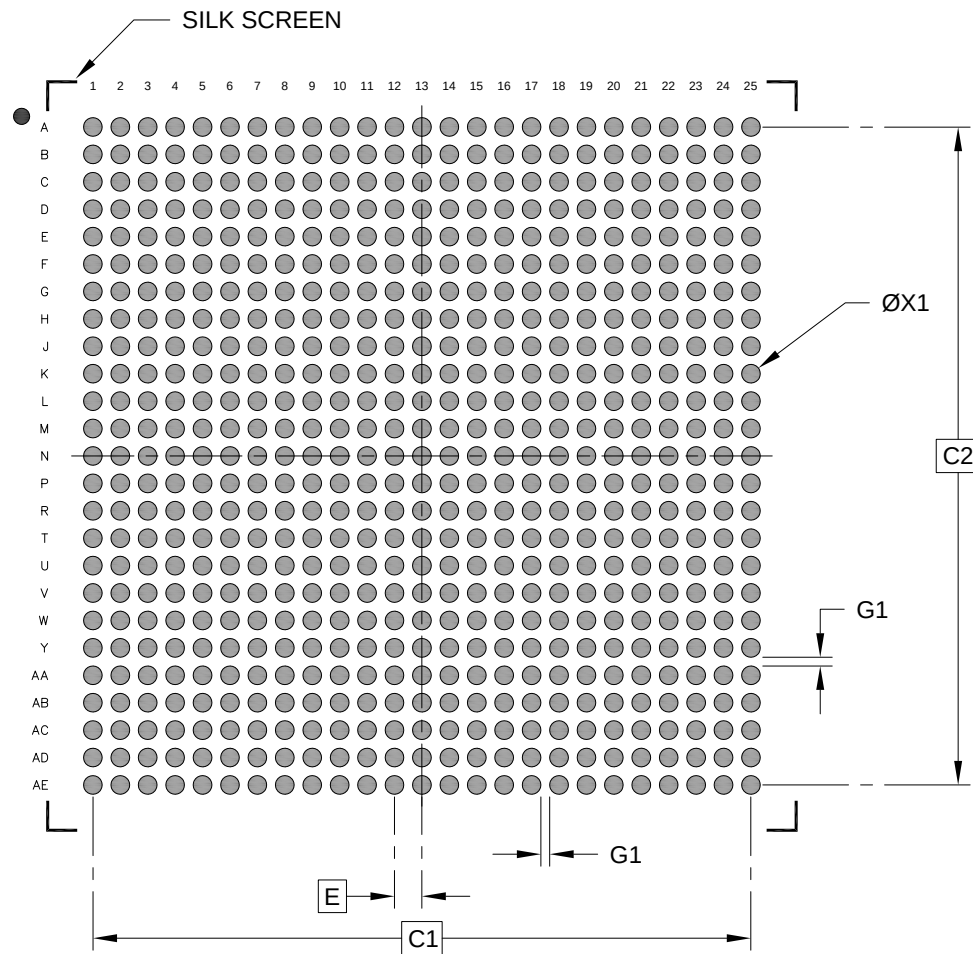

RECOMMENDED LAND PATTERN

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E		1.00 BSC	
Contact Pad Spacing	C1		24.00 BSC	
Contact Pad Spacing	C2		24.00 BSC	
Contact Pad Diameter (X625)	X1			0.68
Contact Pad to Contact Pad	G1		0.32	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-23470 Rev A