
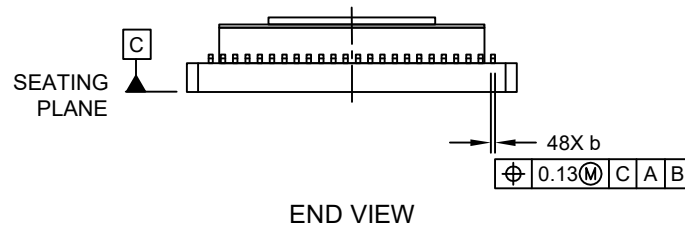
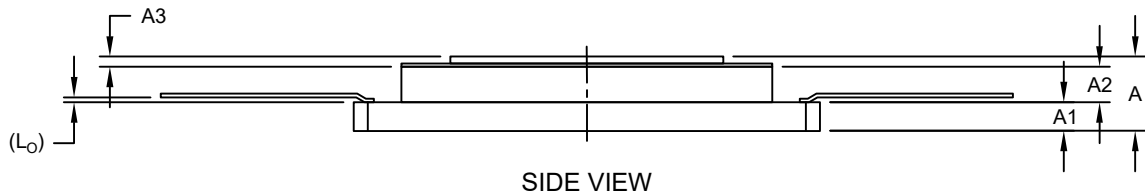



48-Lead Ceramic Multi Layer Flat Pack (3YB) - 19x13.44x2.78 mm Body [MFPF]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

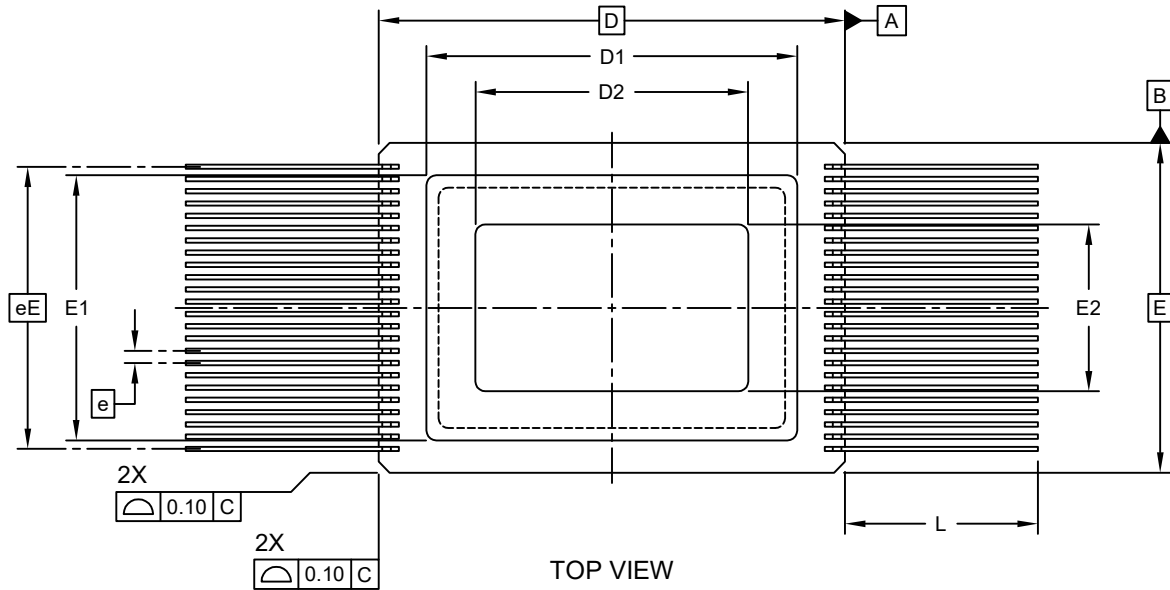

48-Lead Ceramic Multi Layer Flat Pack (3YB) - 19x13.44x2.78 mm Body [MFPPF]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

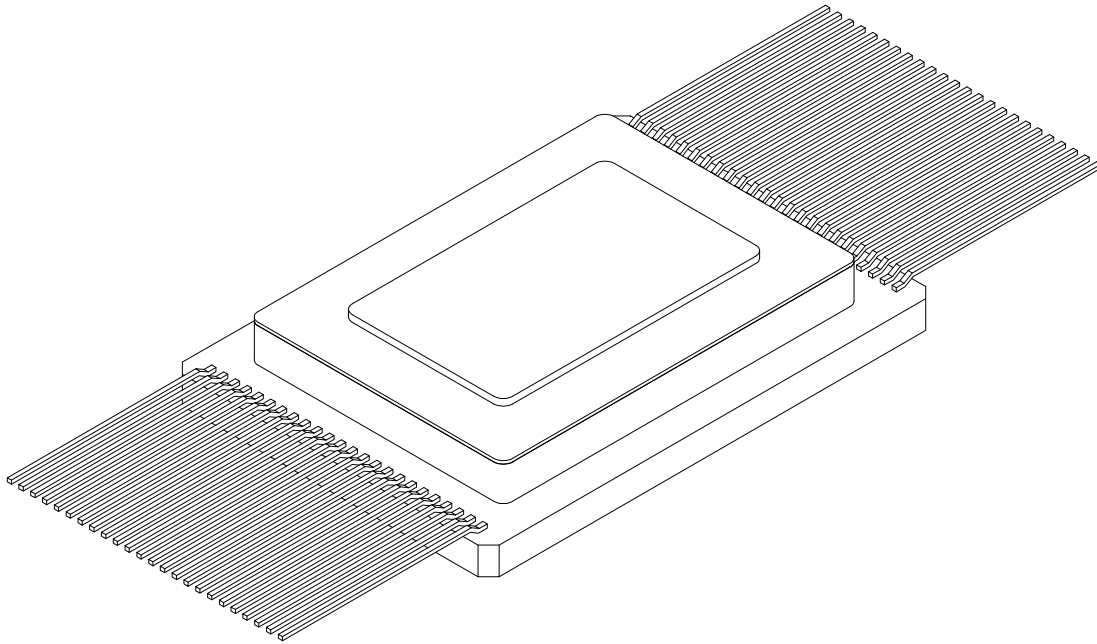

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		048		
Terminal Pitch	e		0.50 BSC		
Overall Terminal Spacing	eE		11.50 BSC		
Overall Height	A		2.54	2.78	3.02
Base Height	A1		0.97	1.05	1.16
Ring Height	A2		1.25	1.35	1.45
Lid Height	A3		0.35	0.38	0.41
Lead Vertical Offset	L _O			0.20 REF	
Overall Length	D		19.00 BSC		
Ring and Lid Flange Length	D1		14.96	15.11	15.26
Lid Length	D2		11.33	11.11	11.19
Overall Width	E		13.44 BSC		
Ring and Lid Flange Width	E1		10.67	10.80	10.93
Lid Width	E2		6.72	6.80	6.88
Terminal Width	b		0.13	0.18	0.23
Terminal Length	L		7.56	7.86	8.11

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.