



135-Lead Very Thin Plastic Quad Flat, No Lead Package (2HC) - 12x12x0.85 mm Body [QFN]; Microsemi Legacy Package XML

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

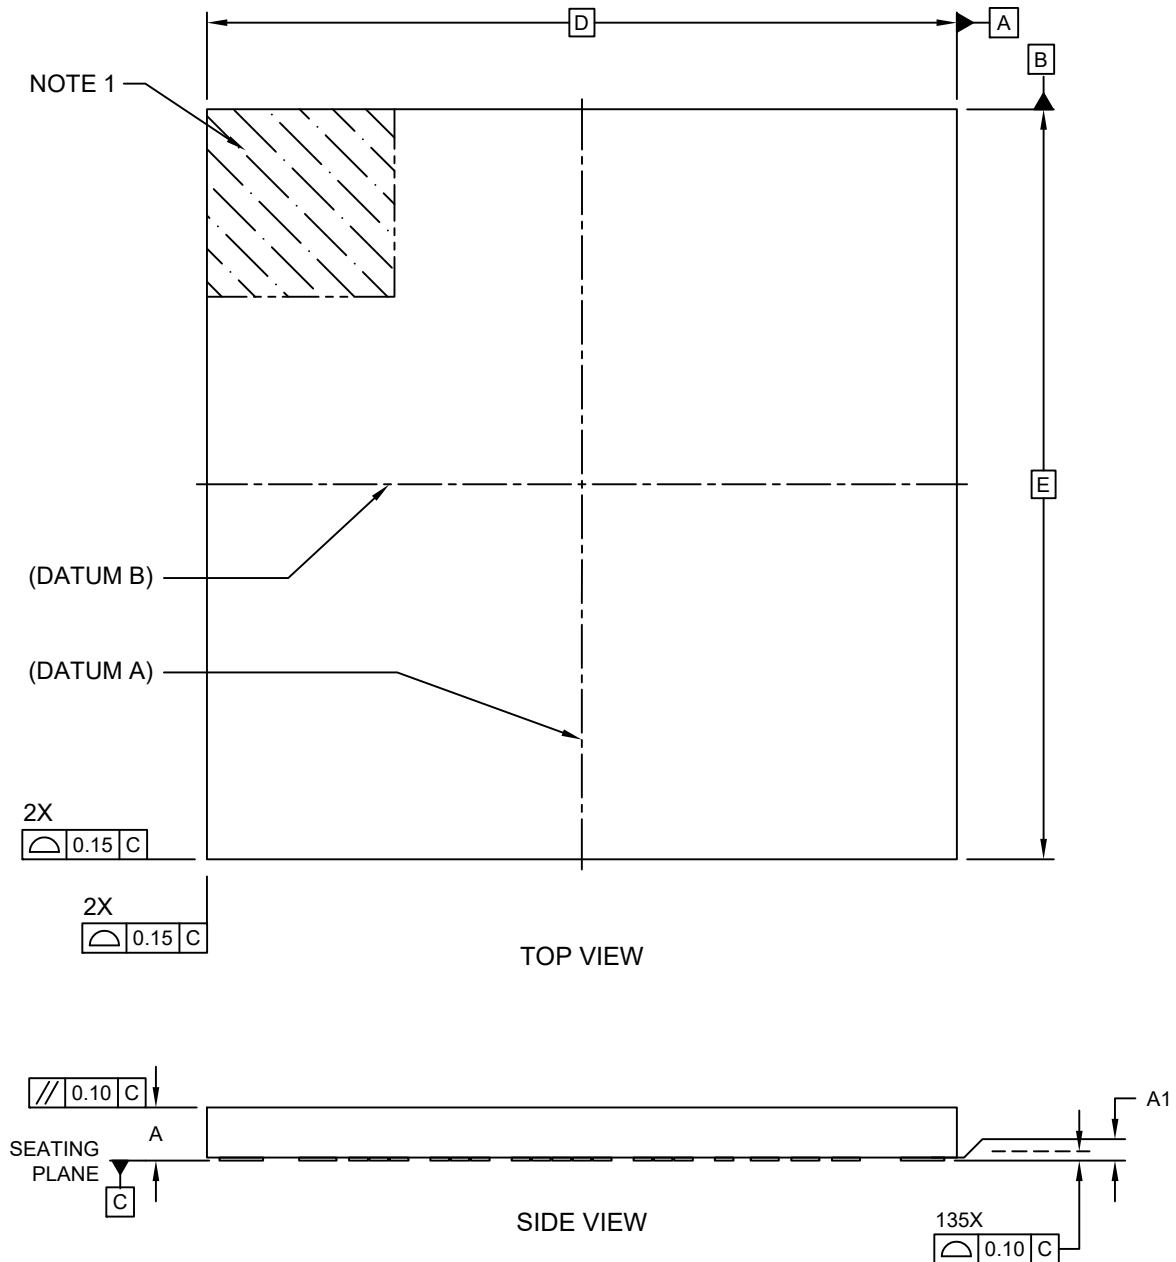


135-Lead Very Thin Plastic Quad Flat, No Lead Package (2HC) - 12x12x0.85 mm Body [QFN]; Microsemi Legacy Package XML

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

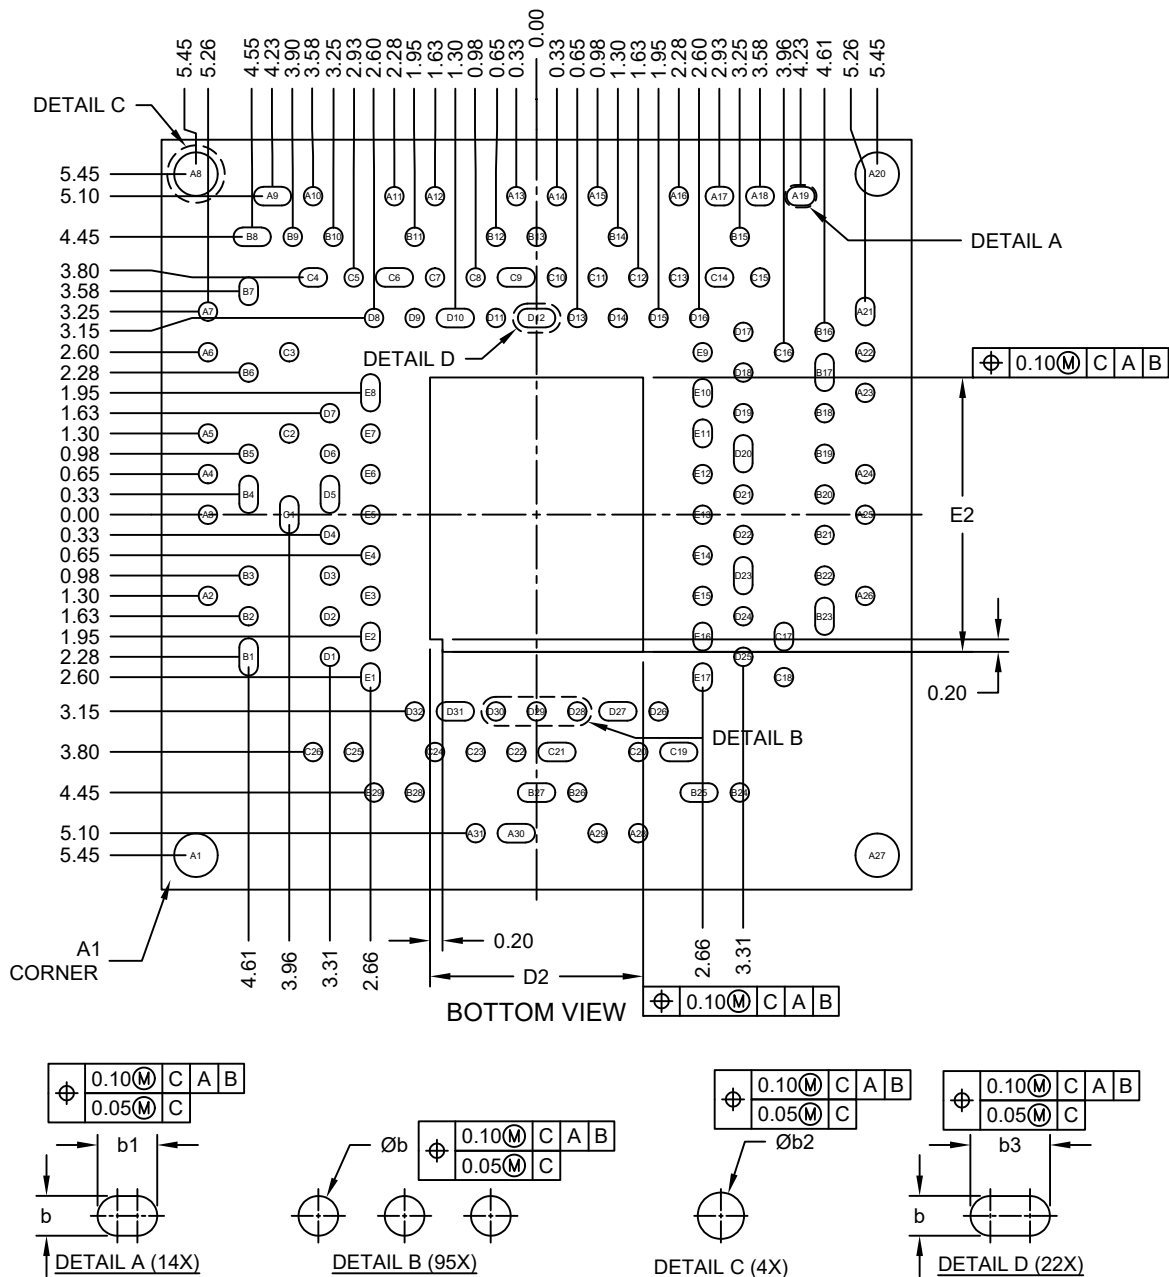

135-Lead Very Thin Plastic Quad Flat, No Lead Package (2HC) - 12x12x0.85 mm Body [QFN]; Microsemi Legacy Package XML

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

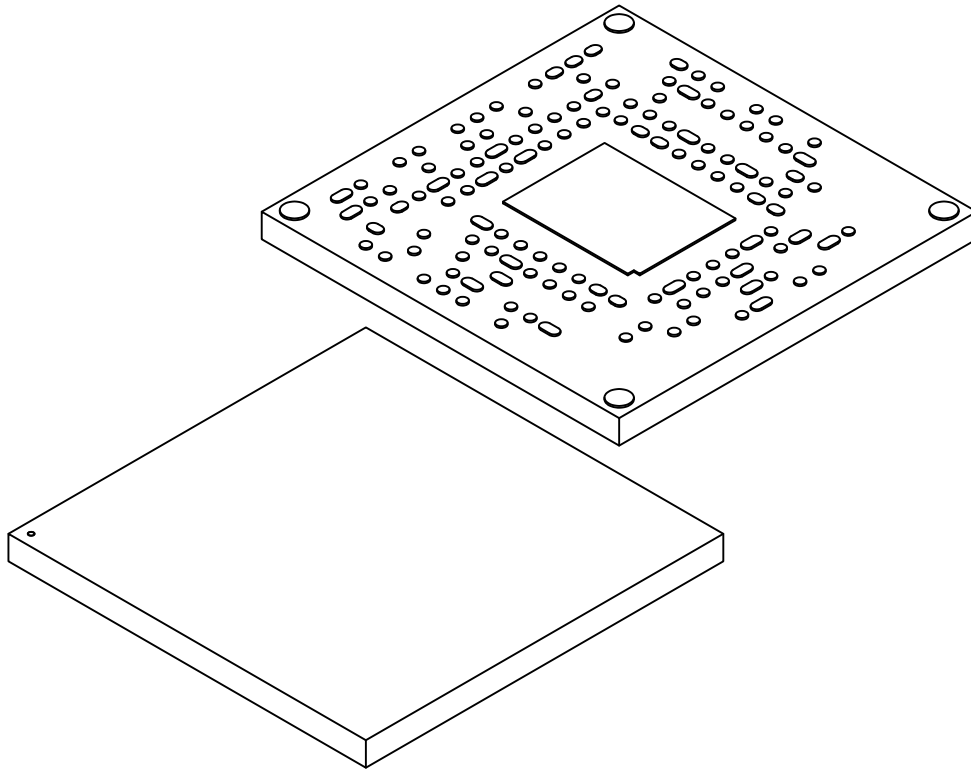


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	135		
Overall Height	A	–	–	0.85
Standoff	A1	0.02	0.05	0.08
Overall Length	D	12.00 BSC		
Exposed Pad Length	D2	3.31	3.41	3.51
Overall Width	E	12.00 BSC		
Exposed Pad Width	E2	4.29	4.39	4.49
Terminal Width	b	0.25	0.30	0.35
Terminal Length	b1	0.40	0.45	0.50
Terminal Length	b2	0.65	0.70	0.75
Terminal Length	b3	0.55	0.60	0.65

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.





135-Lead Very Thin Plastic Quad Flat, No Lead Package (2HC) - 12x12x0.85 mm Body [QFN]; Microsemi Legacy Package XML

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

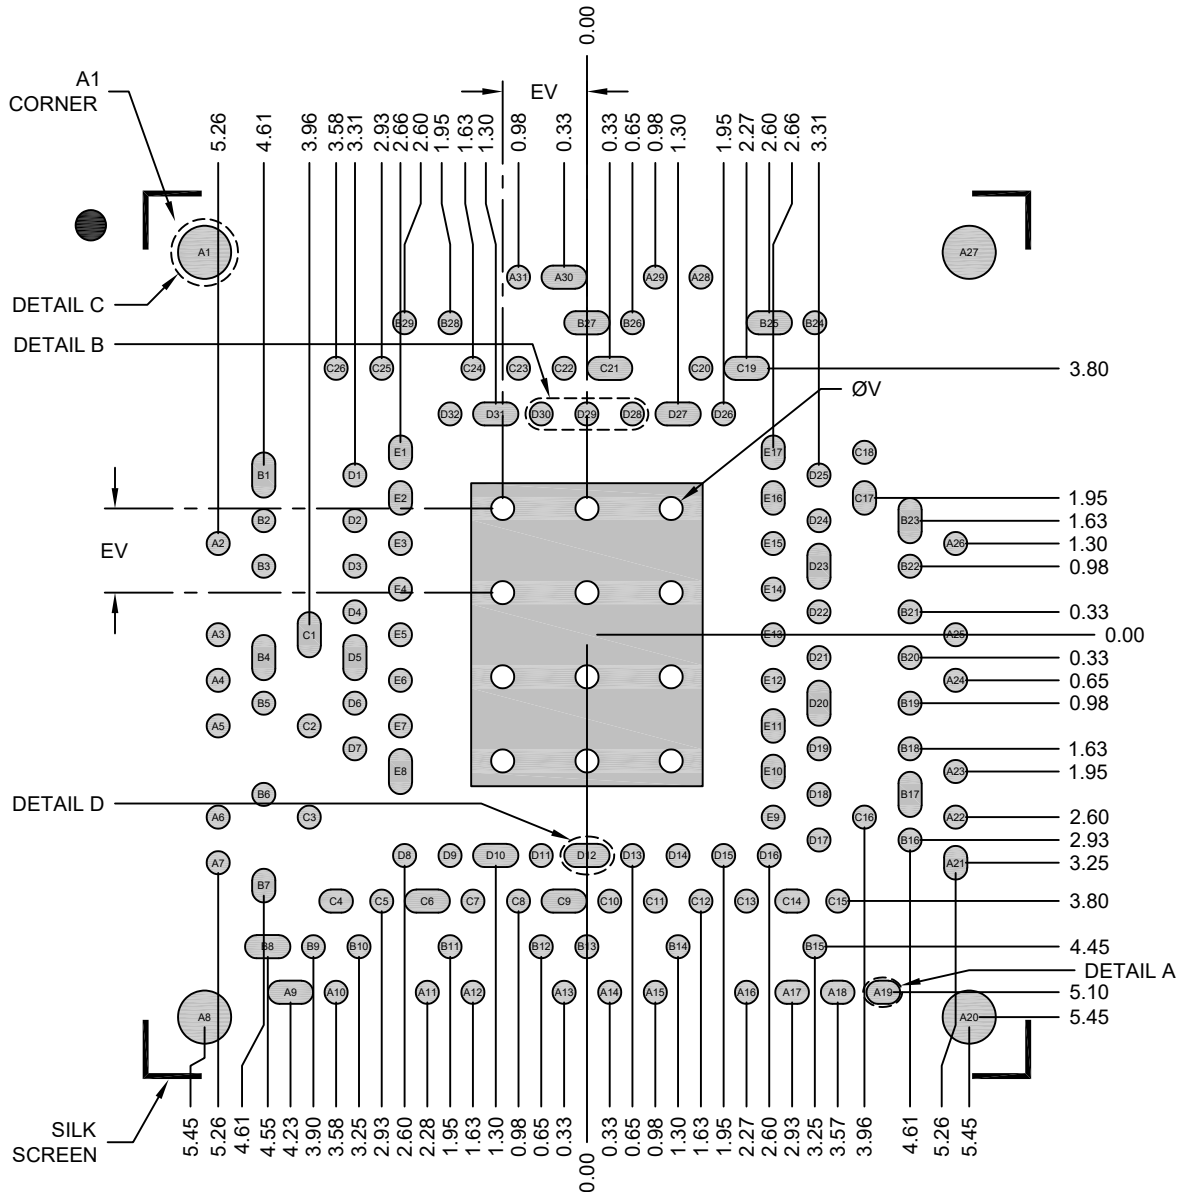

135-Lead Very Thin Plastic Quad Flat, No Lead Package (2HC) - 12x12x0.85 mm Body [QFN]; Microsemi Legacy Package XML

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

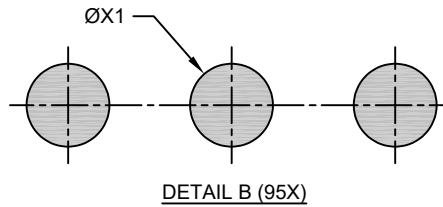

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pad Width (Xnn)	X1			0.33
Center Pad Width	X2			0.76
Contact Pad Length (Xnn)	Y1			0.48
Center Pad Length	Y2			0.64
Thermal Via Diameter	V		0.33	
Thermal Via Pitch	EV		1.20	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process