


Packaging Diagrams and Parameters

672-Ball Heat Spreader FlipChip BGA (4BC) 27x27mm Body [HFCBGA] Microsemi Legacy Package: YIH


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

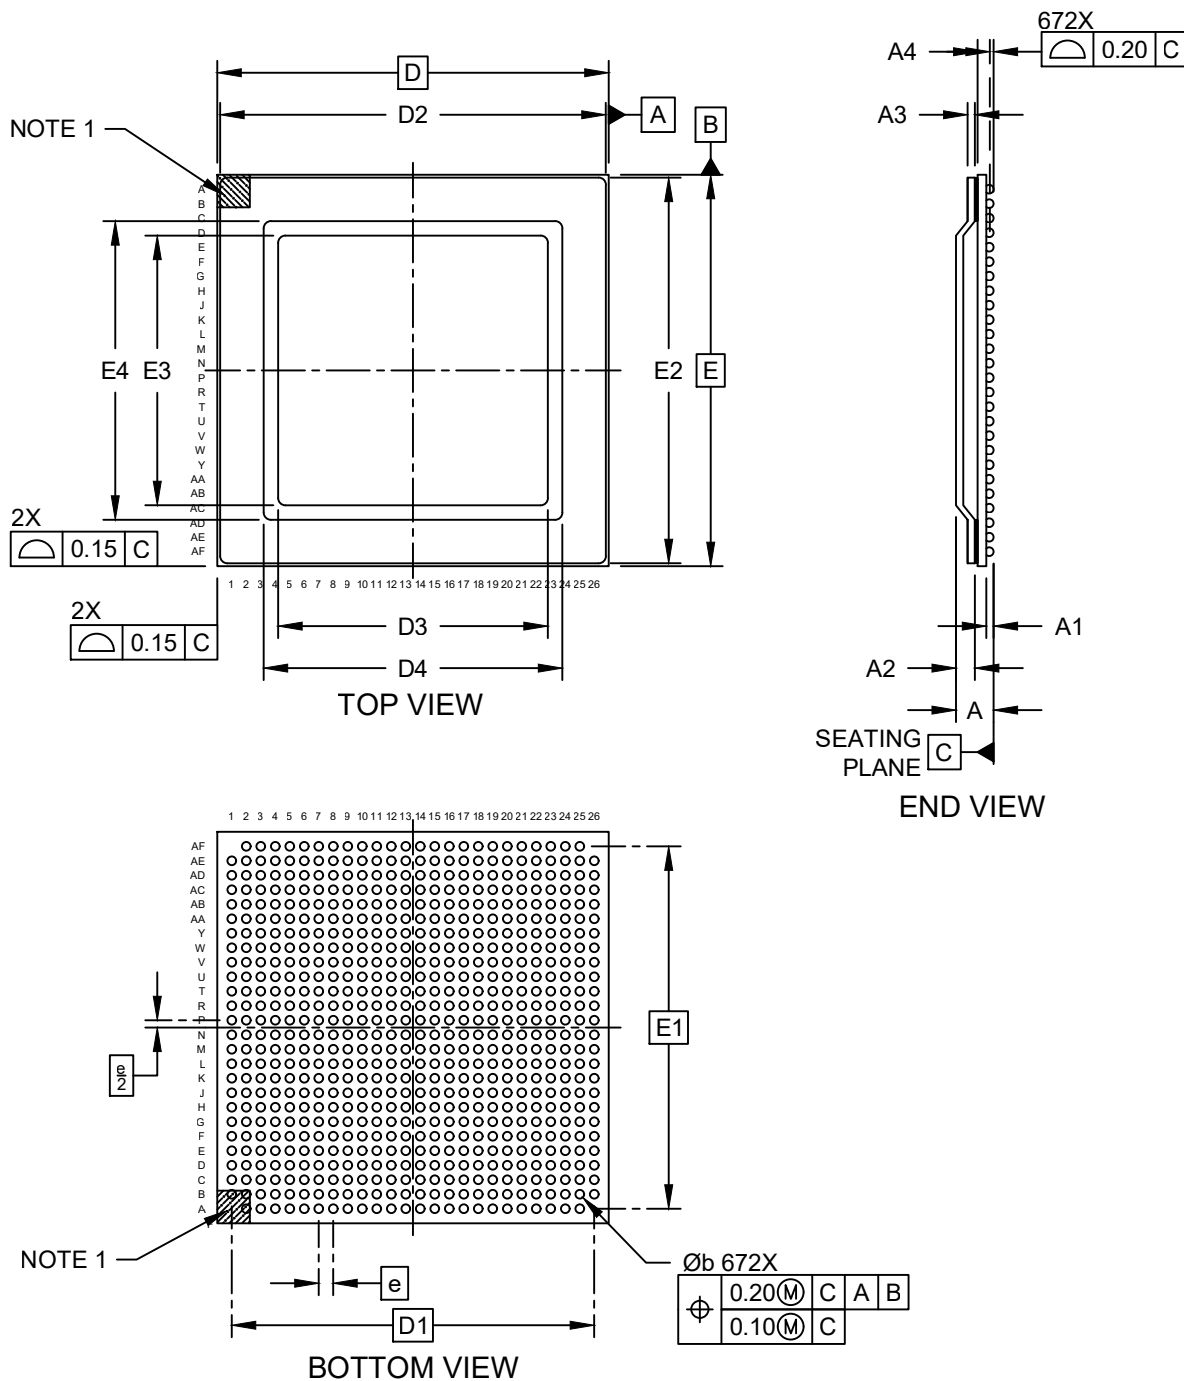

Packaging Diagrams and Parameters

672-Ball Heat Spreader FlipChip BGA (4BC) 27x27mm Body [HFCBGA] Microsemi Legacy Package: YIH

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

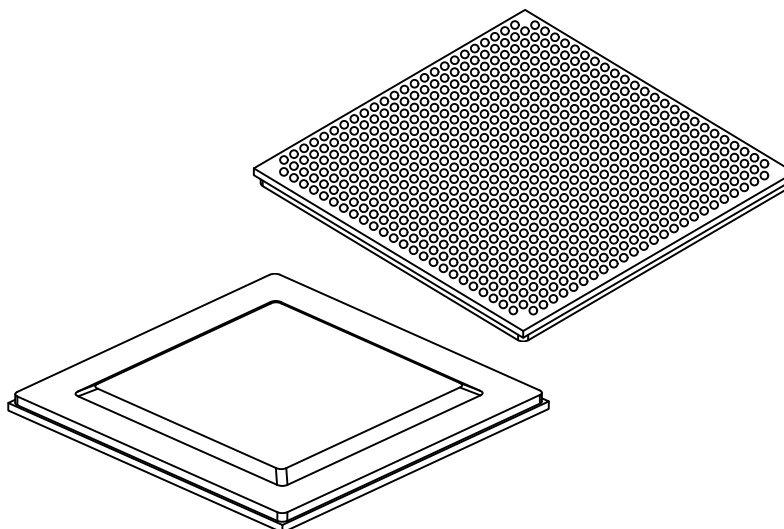

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		672		
Pitch	e		1.00 BSC		
Overall Height	A		2.44	2.59	2.74
Ball Height	A1		0.40	–	0.60
Heat Spreader Height	A2		1.27	1.30	1.33
HeatSpreader Thickness	A3		0.47	0.50	0.53
Substrate to Package Bottom	A4		0.95	1.10	1.25
Overall Length	D		27.00 BSC		
Ball Array Length	D1		25.00 BSC		
Heat Spreader Length	D2		26.55	26.60	26.65
Heat Spreader Top Length	D3		18.55	18.60	18.65
Heat Spreader Taper Length	D4		20.55	20.60	20.65
Overall Width	E		27.00 BSC		
Ball Array Width	E1		25.00 BSC		
Heat Spreader Width	E2		26.55	26.60	26.65
Heat Spreader Top Width	E3		18.55	18.60	18.65
Heat Spreader Taper Width	E3		20.55	20.60	20.65
Ball Diameter	b		0.50	-	0.70


Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

Land Pattern

672-Ball Heat Spreader FlipChip BGA (4BC) 27x27mm Body [HFCBGA] Microsemi Legacy Package: YIH

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

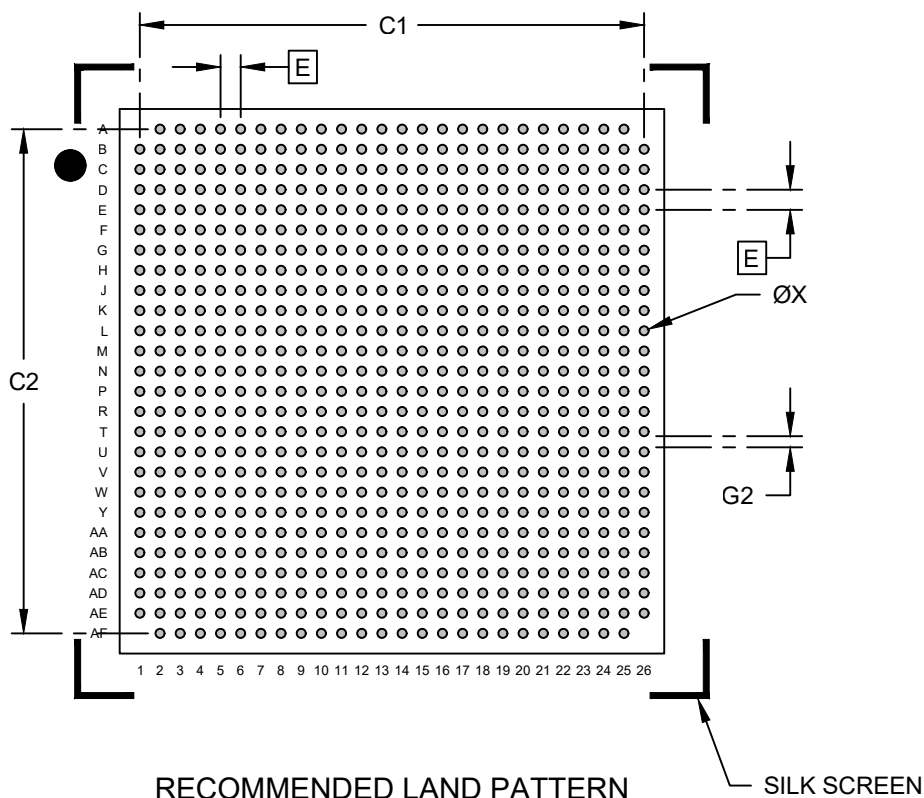

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	1.00 BSC		
Contact Pad Spacing	C1		25.00	
Contact Pad Spacing	C2		25.00	
Contact Pad Diameter (X676)	X			0.45
Contact Pad to Contact Pad (X672)	G2	0.55		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, please refer to current industry standard IPC-7093.