



## 96-Ball Flip Chip, Chip Scale Package (4JC) 10x10x1.26mm [FCCSP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

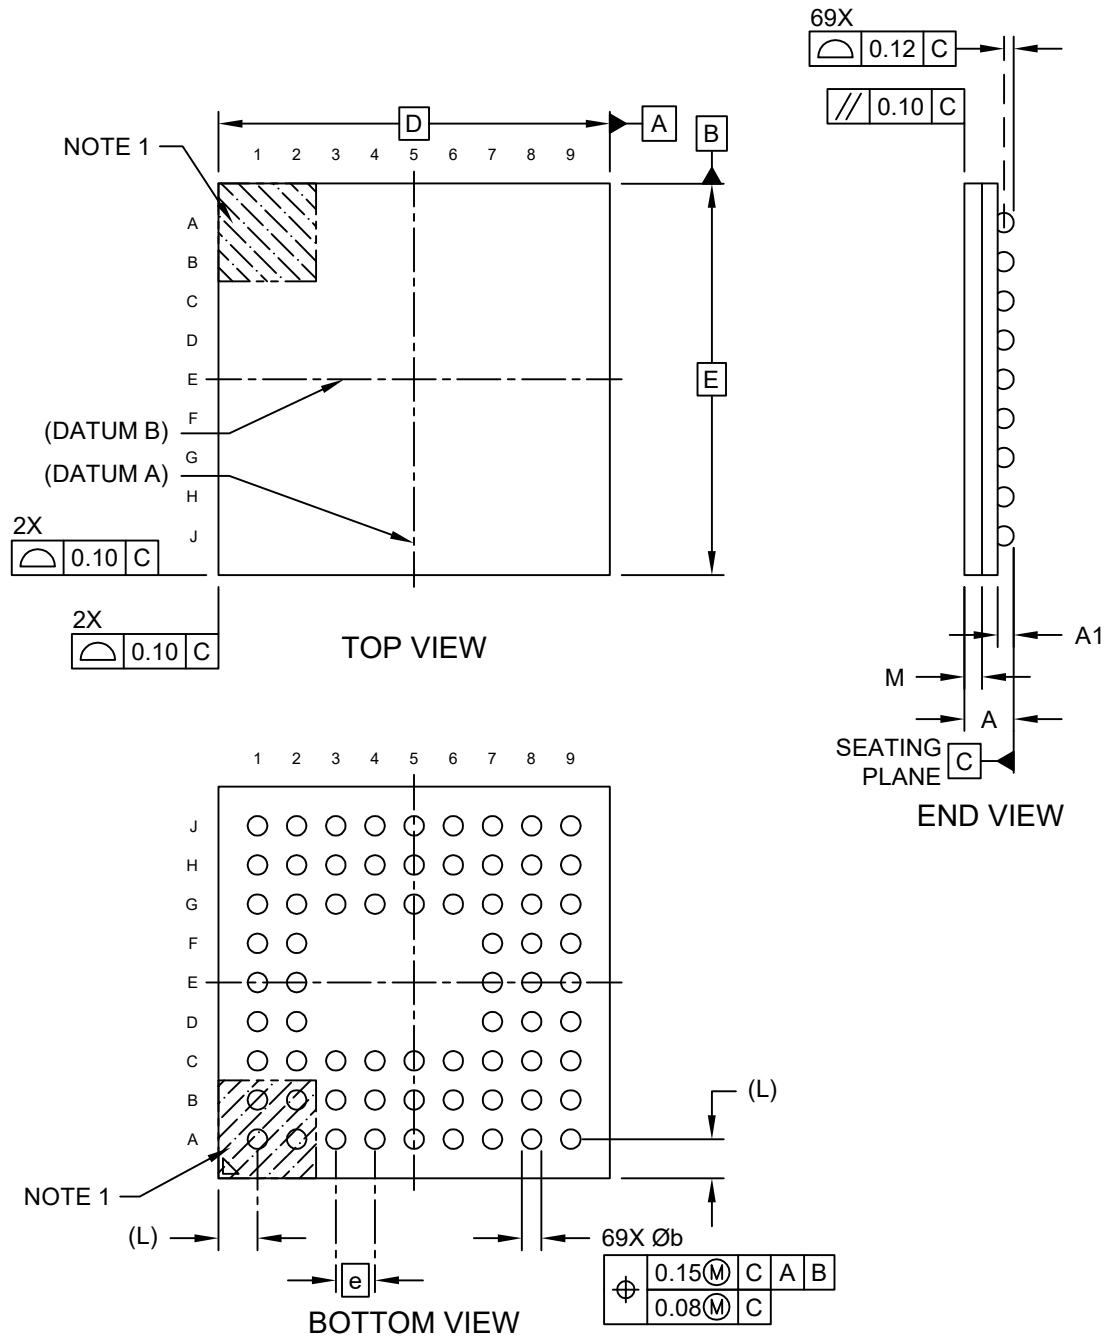

## 96-Ball Flip Chip, Chip Scale Package (4JC) 10x10x1.26mm [FCCSP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

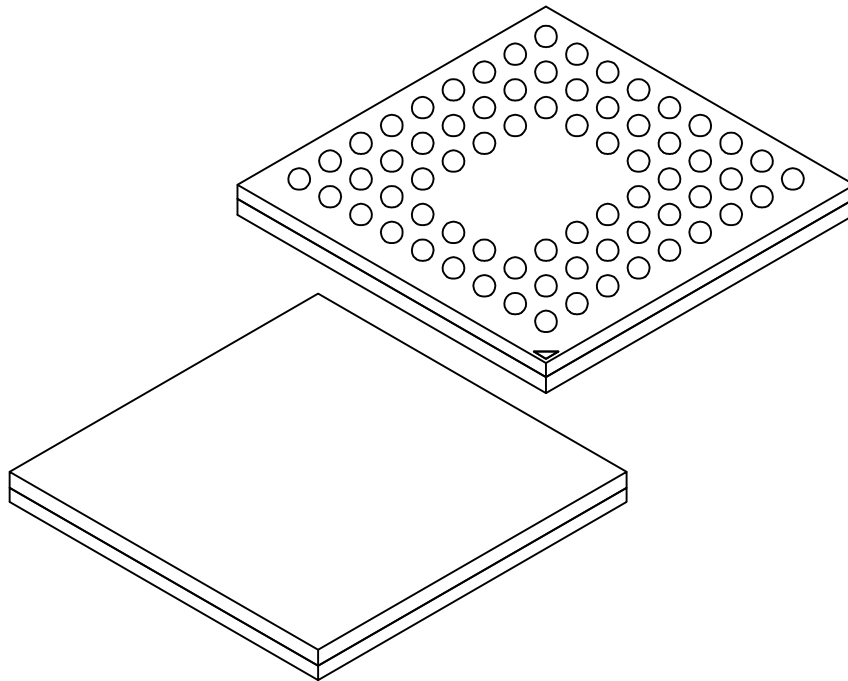


| Units               |    | MILLIMETERS |      |      |
|---------------------|----|-------------|------|------|
| Dimension Limits    |    | MIN         | NOM  | MAX  |
| Number of Terminals | N  | 69          |      |      |
| Pitch               | e  | 1.00 BSC    |      |      |
| Overall Height      | A  | 1.06        | 1.16 | 1.26 |
| Ball Height         | A1 | 0.36        | 0.41 | 0.46 |
| Mold Thickness      | A2 | 0.40        | 0.45 | 0.50 |
| Overall Length      | D  | 10.00 BSC   |      |      |
| Overall Width       | E  | 10.00       |      |      |
| Ball Diameter       | b  | 0.45        | 0.50 | 0.55 |
| Edge to Ball Center | L  | 1.00 REF    |      |      |

### Notes:

- Ball A1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.  
REF: Reference Dimension, usually without tolerance, for information purposes only.

## 96-Ball Flip Chip, Chip Scale Package (4JC) 10x10x1.26mm [FCCSP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

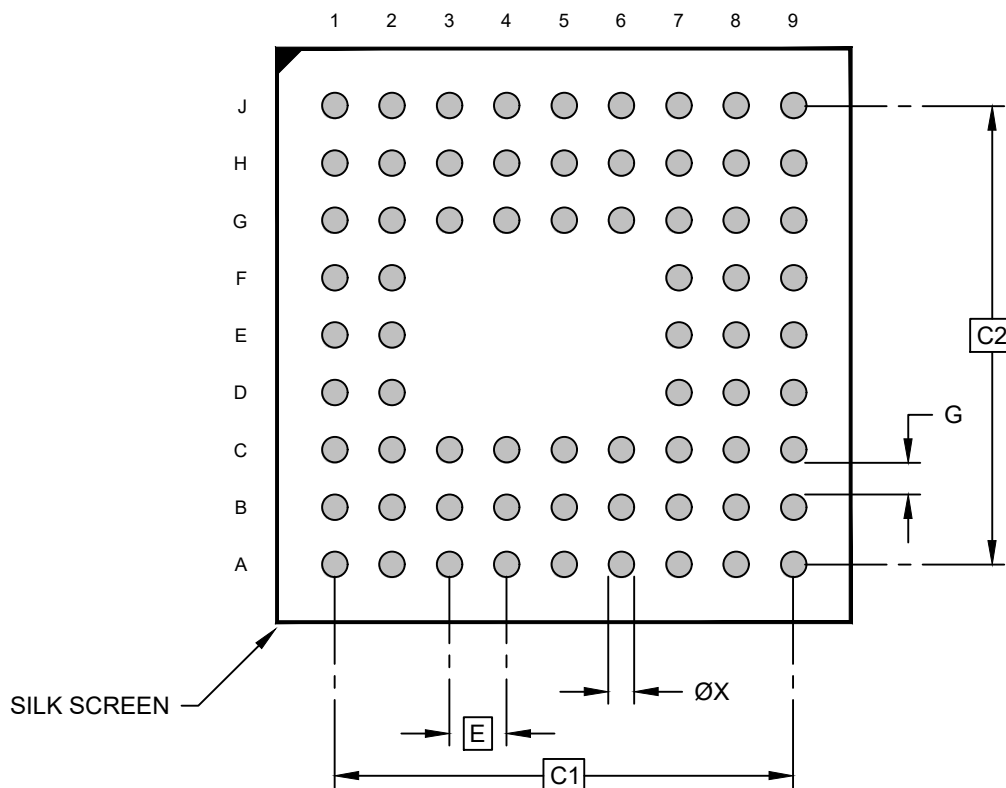

### RECOMMENDED LAND PATTERN

| Units                      |    | MILLIMETERS |     |      |
|----------------------------|----|-------------|-----|------|
| Dimension Limits           |    | MIN         | NOM | MAX  |
| Contact Pitch              | E  | 1.00 BSC    |     |      |
| Contact Pad Spacing        | C1 | 8.00 BSC    |     |      |
| Contact Pad Spacing        | C2 | 8.00 BSC    |     |      |
| Contact Pad Diameter       | X  |             |     | 0.45 |
| Contact Pad to Contact Pad | G  | 0.55        |     |      |

#### Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.