



888-Ball Thick Fine Pitch Ball Grid Array (5CC) - 25x25x2.848 mm Body [HBFBGA] With Heat Spreader

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

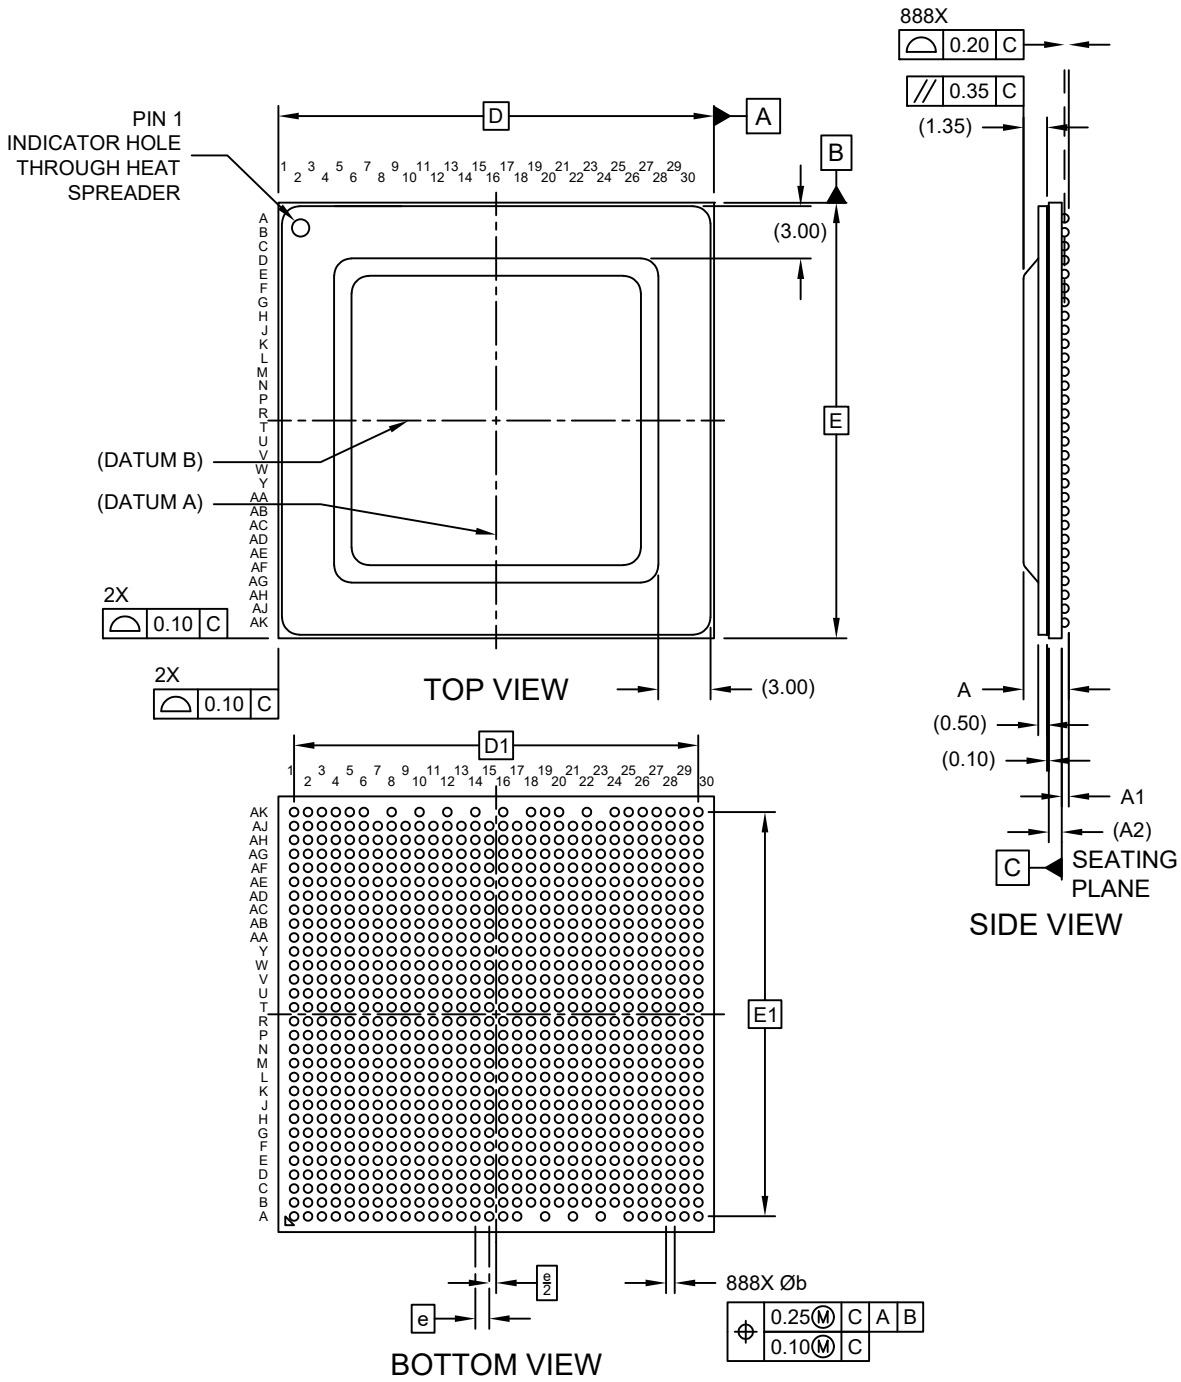

888-Ball Thick Fine Pitch Ball Grid Array (5CC) - 25x25x2.848 mm Body [HBFBGA]
With Heat Spreader

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

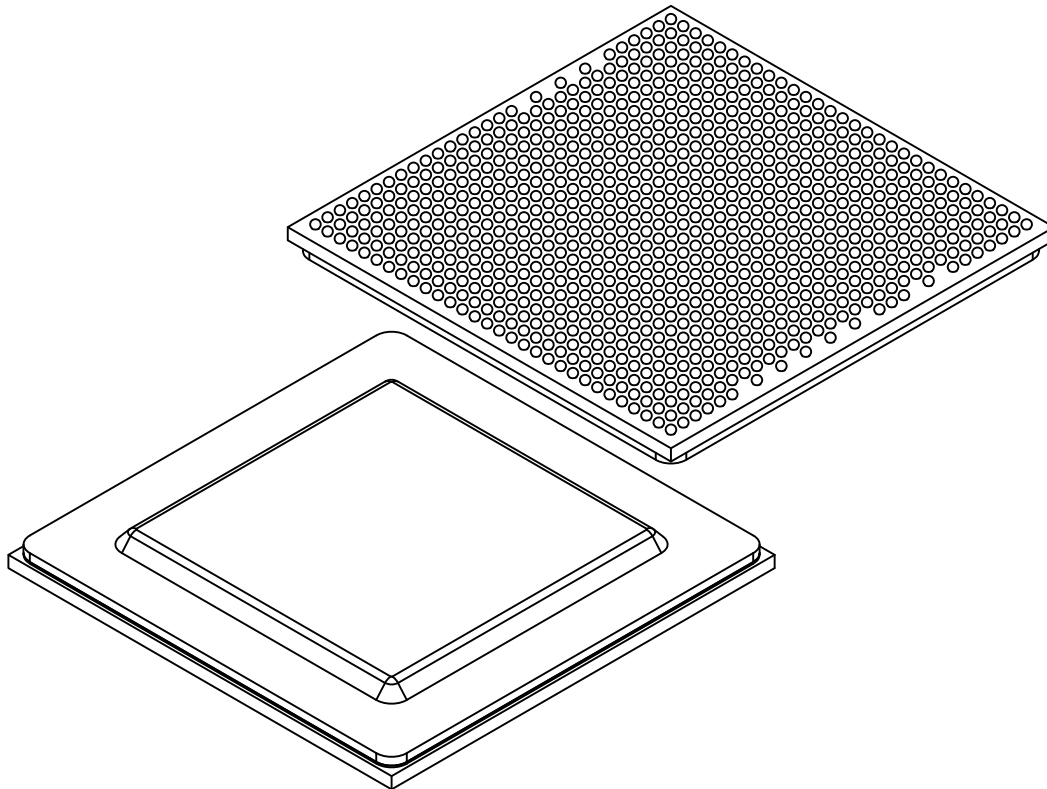


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	888		
Pitch	e	0.80 BSC		
Overall Height	A	2.348	2.598	2.848
Standoff	A1	0.30	-	0.50
Substrate Thickness	A2	0.748 REF		
Overall Length	D	25.00 BSC		
Overall Ball Pitch	D1	23.20 BSC		
Overall Width	E	25.00 BSC		
Overall Ball Pitch	E1	23.20 BSC		
Terminal Width	b	0.40	-	0.60

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only, shown in parentheses.

888-Ball Thick Fine Pitch Ball Grid Array (5CC) - 25x25x2.848 mm Body [HBFBGGA] With Heat Spreader

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

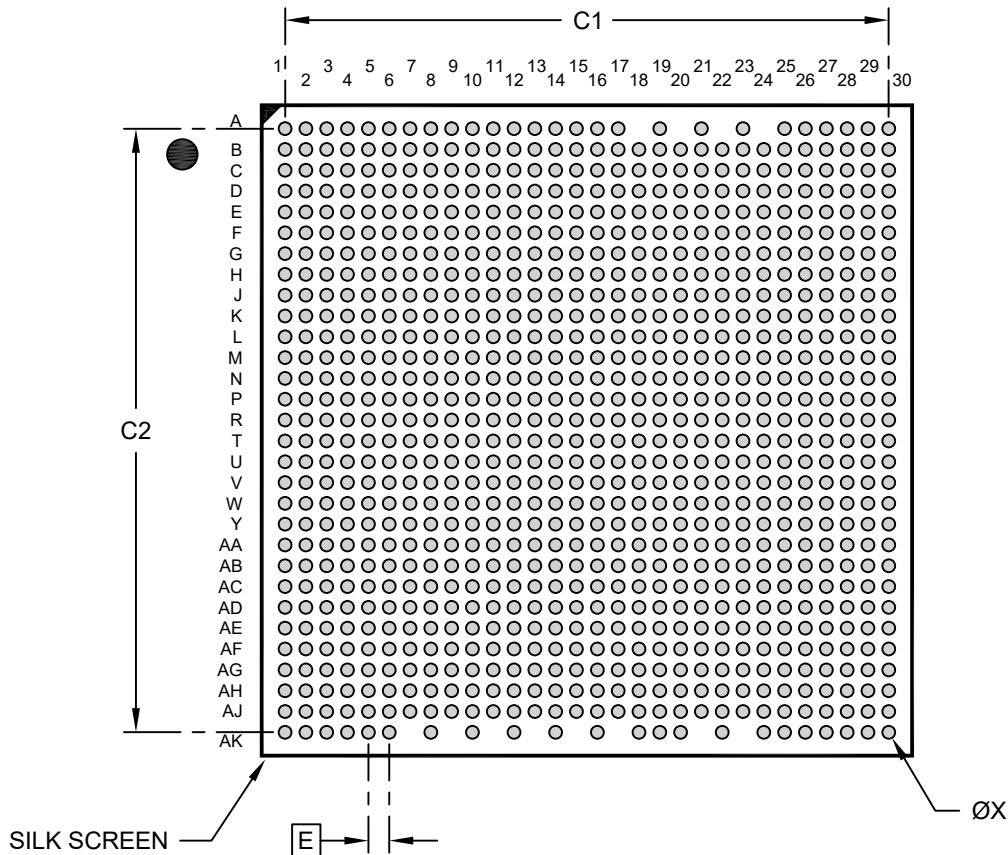

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Contact Pad Spacing	C1		23.20	
Contact Pad Spacing	C2		23.20	
Contact Pad Diameter (X888)	X			0.50

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- Diameter of solder mask opening is 0.48 ± 0.05 mm

Microchip Technology Drawing C04-27057 Rev B