



1022-Ball Thick Fine-Pitch Ball Grid Array (6FC) - 27x27x3.18 mm Body [BFBGA] Microsemi Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

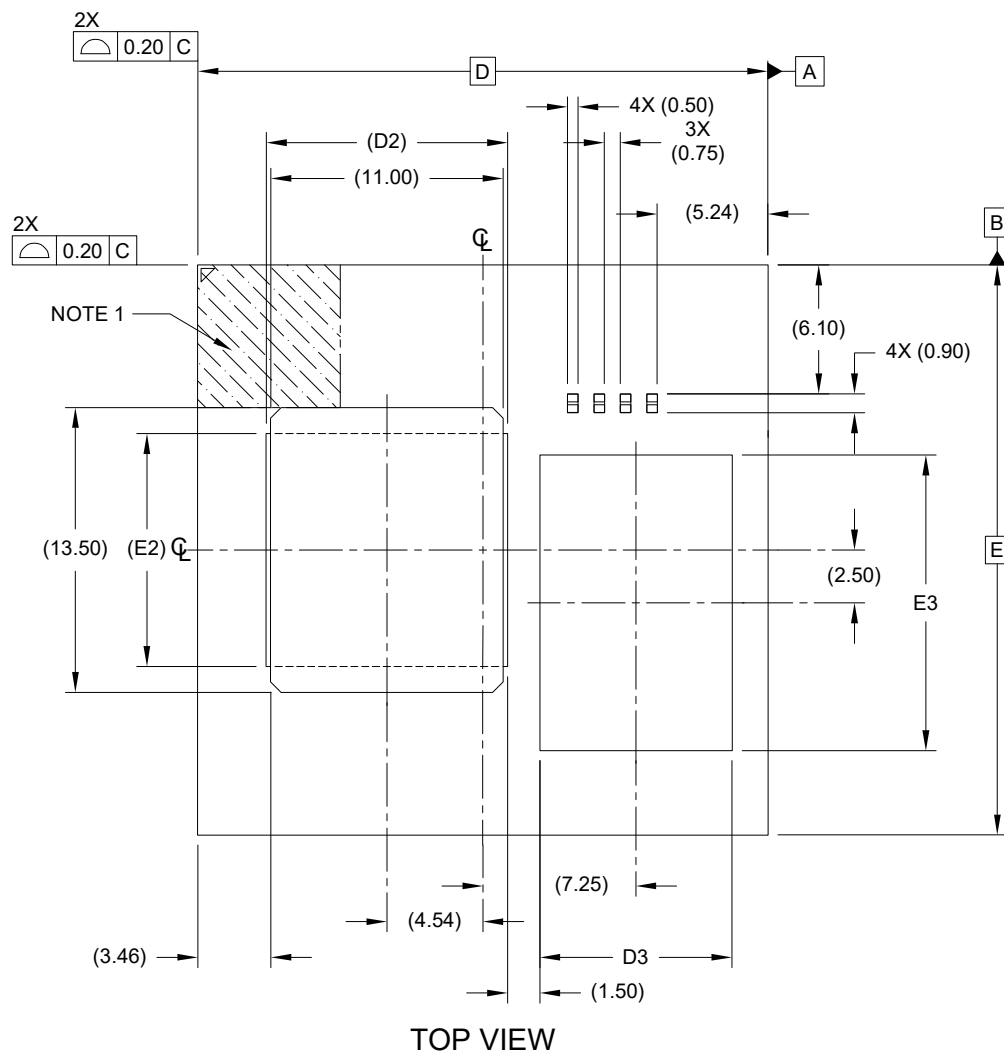


**1022-Ball Thick Fine-Pitch Ball Grid Array (6FC) - 27x27x3.18 mm Body [BFBGA]
Microsemi Legacy Package**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

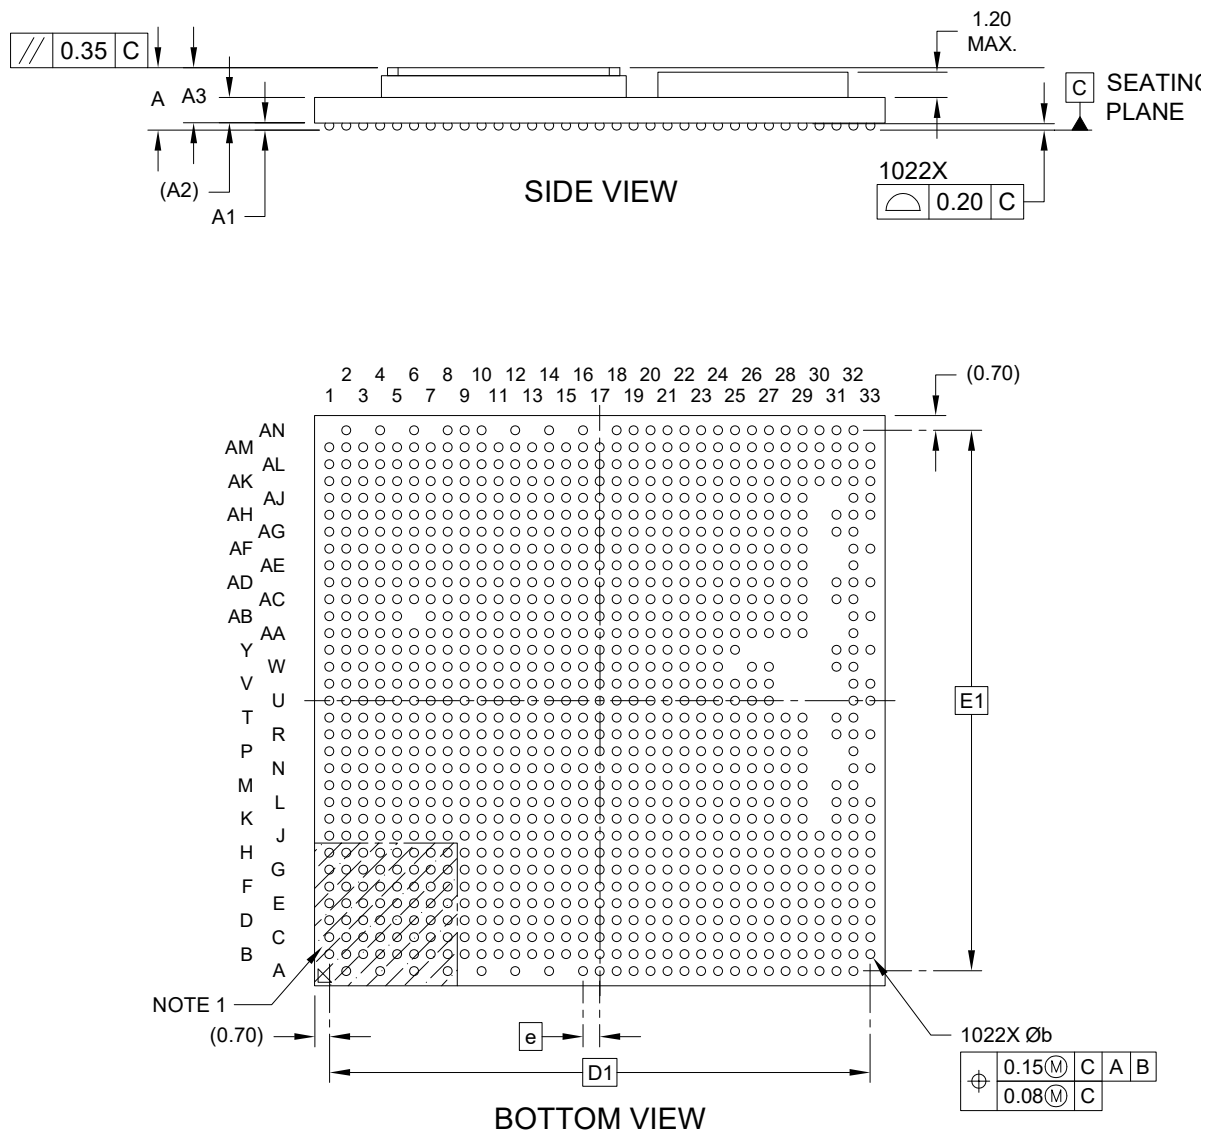

1022-Ball Thick Fine-Pitch Ball Grid Array (6FC) - 27x27x3.18 mm Body [BFBGA] Microsemi Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

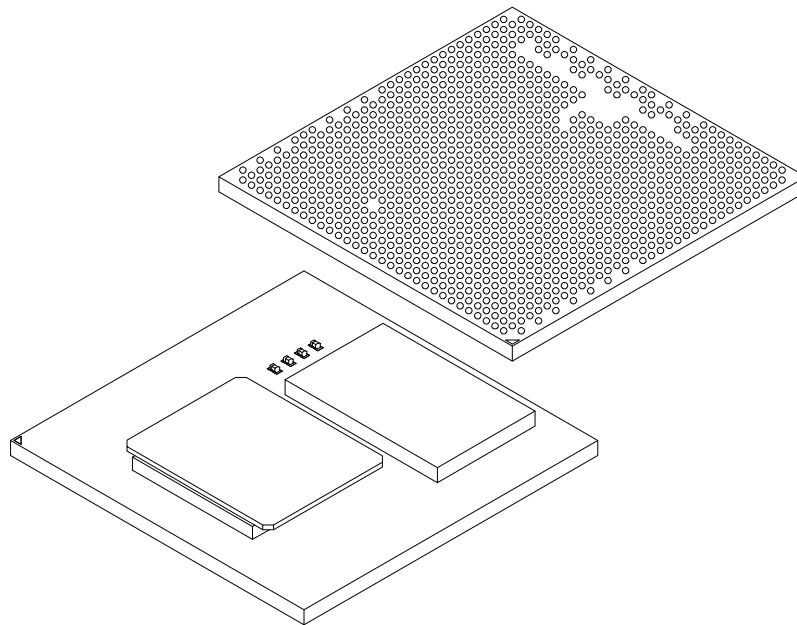


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N			1022	
Pitch	e			0.80	
Overall Height	A		2.60	2.96	3.18
Ball Height	A1		0.25	0.35	0.15
Substrate Thickness	A2			1.20 REF	
Package Thickness	A3		2.35	2.61	2.73
Overall Length	D			27.00 BSC	
Ball Array Length	D1			25.60 BSC	
Chip Length	D2			11.43 REF	
Chip Length	D3		—	—	9.10
Overall Width	E			27.00 BSC	
Ball Array Width	E1			25.60 BSC	
Chip Width	E2			11.03 REF	
Chip Width	E3		—	—	14.00
Ball Diameter	b		0.40	0.45	0.50

Notes:

- Terminal A1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

1022-Ball Thick Fine-Pitch Ball Grid Array (6FC) - 27x27x3.18 mm Body [BFBGA] Microsemi Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

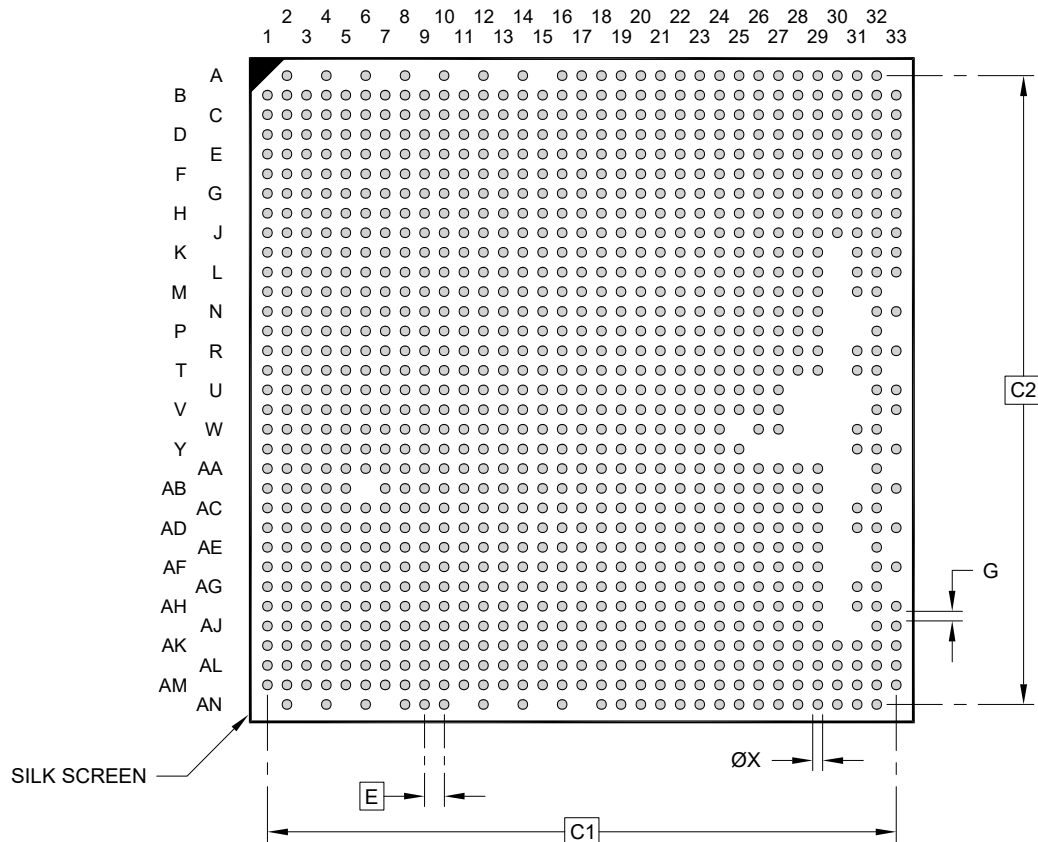

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Contact Pad Spacing	C1	25.60 BSC		
Contact Pad Spacing	C2	25.60 BSC		
Contact Pad Diameter	X			0.40
Contact Pad to Contact Pad (Xnn)	G	0.40		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-27063 Rev A