



1330-Ball Thick Fine-Pitch Ball Grid Array Package (6VC) **31x31x3.38 mm Body [BFBGA]**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

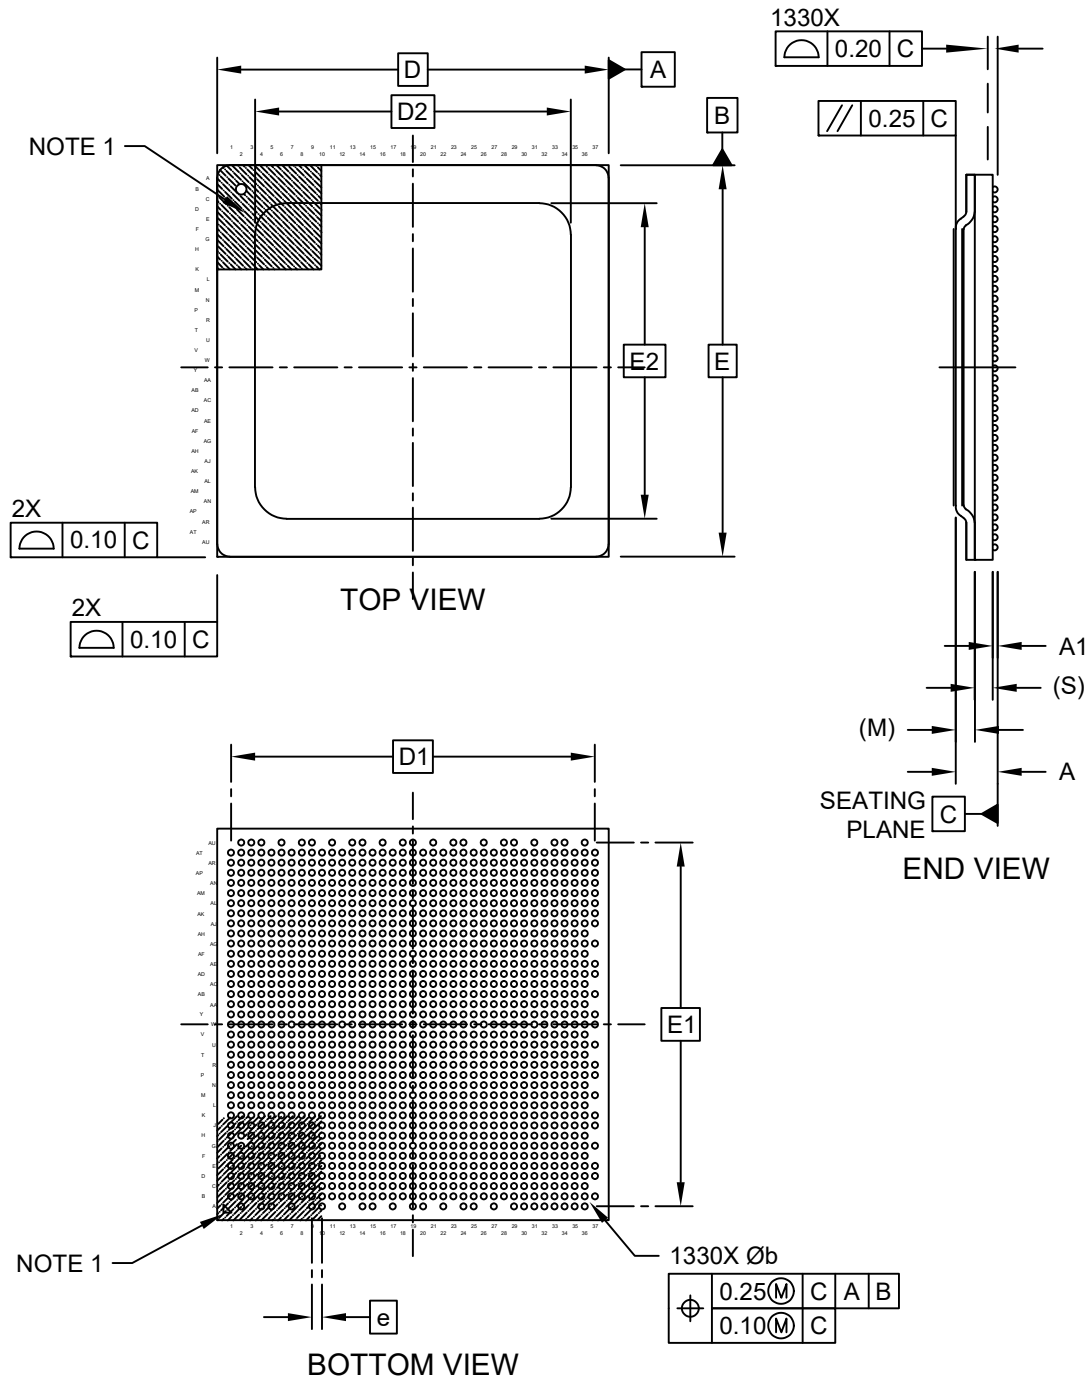

**1330-Ball Thick Fine-Pitch Ball Grid Array Package (6VC)
31x31x3.38 mm Body [BFBGA]**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

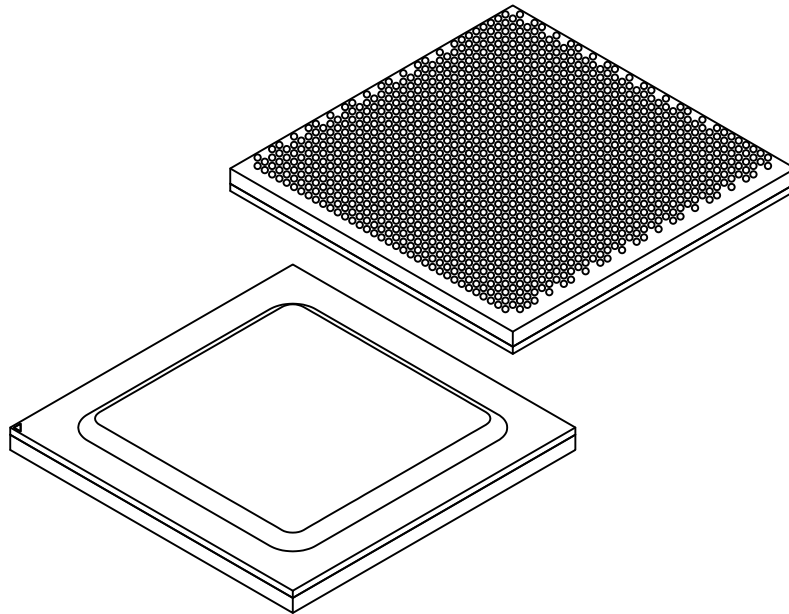


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		1330		
Pitch	e		0.80 BSC		
Overall Height	A		2.88	3.13	3.38
Ball Height	A1		0.30	0.40	0.50
Lid Thickness	M		1.50 REF		
Substrate Thickness	S		1.34 REF		
Overall Length	D		31.00 BSC		
Ball Array Length	D1		28.80 BSC		
Cap Length	D2		24.60 BSC		
Overall Width	E		31.00 BSC		
Ball Array Width	E1		28.80 BSC		
Cap Width	E2		24.60 BSC		
Ball Diameter	b		0.40	0.50	0.60

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

1330-Ball Thick Fine-Pitch Ball Grid Array Package (6VC) 31x31x3.38 mm Body [BFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

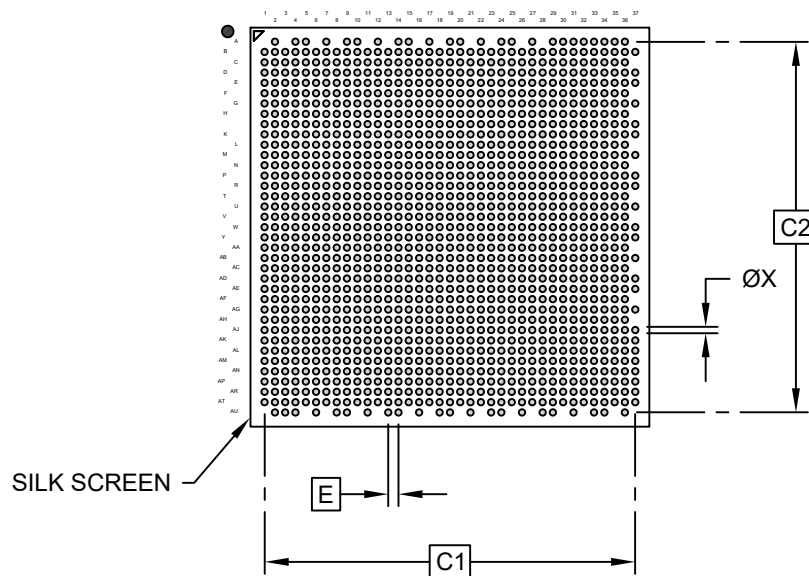

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Contact Pad Spacing	C1	28.80 BSC		
Contact Pad Spacing	C2	28.80 BSC		
Contact Pad Diameter (X1330)	X			0.45

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-27077 Rev A