



# **256-Ball Flip Chip Ball Grid Array (8AC) - 27x27x2.84 mm Body [FCBGA] Microsemi Legacy Package 256\_FCBGA**

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

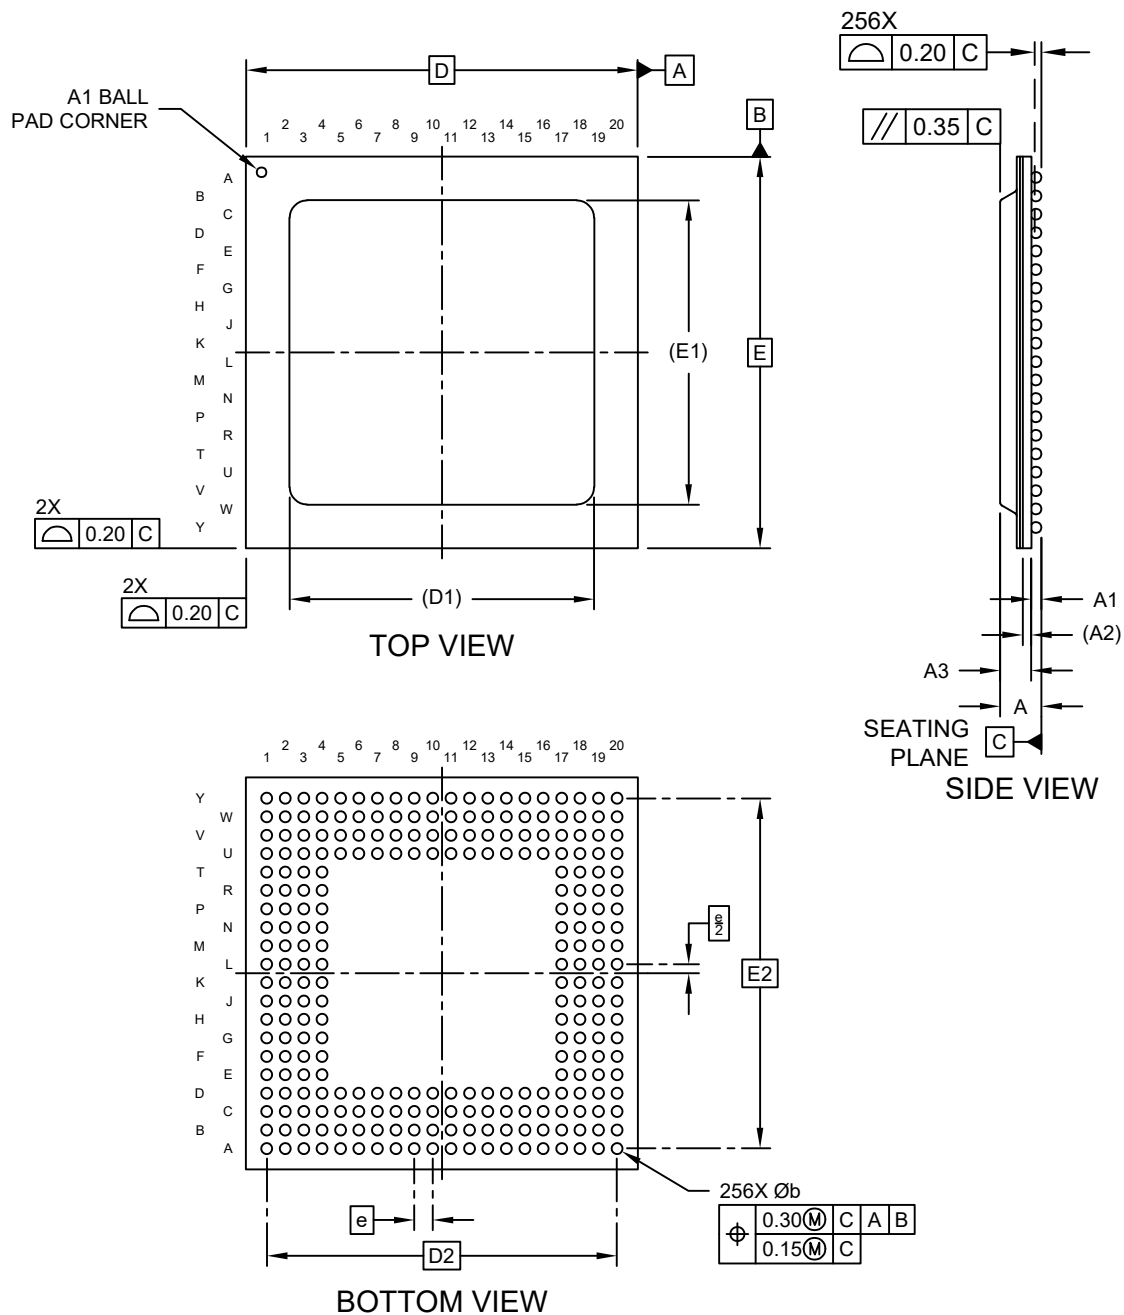

**256-Ball Flip Chip Ball Grid Array (8AC) - 27x27x2.84 mm Body [FCBGA]  
Microsemi Legacy Package 256\_FCBGA**

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

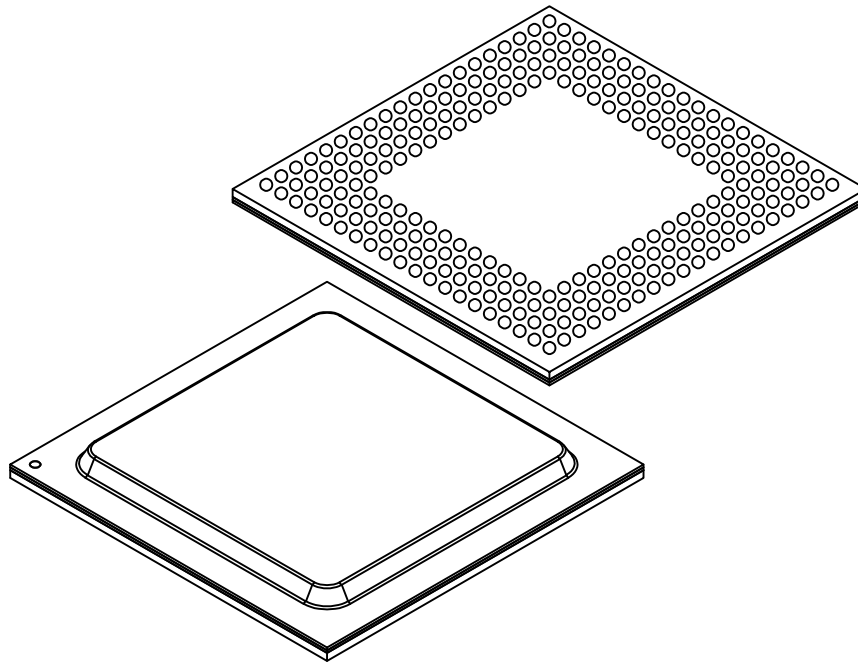


| Units               |    | MILLIMETERS |      |      |
|---------------------|----|-------------|------|------|
| Dimension Limits    |    | MIN         | NOM  | MAX  |
| Number of Terminals | N  | 256         |      |      |
| Pitch               | e  | 1.27 BSC    |      |      |
| Overall Height      | A  | 2.24        | 2.58 | 2.84 |
| Ball Height         | A1 | 0.50        | 0.64 | 0.70 |
| Substrate Thickness | A2 | 0.58 REF    |      |      |
| Package Thickness   | A3 | 1.74        | 1.94 | 2.14 |
| Overall Length      | D  | 27.00 BSC   |      |      |
| Cap Length          | D1 | 21.00 REF   |      |      |
| Ball Array Length   | D2 | 24.13 BSC   |      |      |
| Overall Width       | E  | 27.00 BSC   |      |      |
| Cap Width           | E1 | 21.00 REF   |      |      |
| Ball Array Width    | E2 | 24.13 BSC   |      |      |
| Ball Diameter       | b  | 0.60        | 0.76 | 0.90 |

**Notes:**

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.  
REF: Reference Dimension, usually without tolerance, for information purposes only.

## 256-Ball Flip Chip Ball Grid Array (8AC) - 27x27x2.84 mm Body [FCBGA] Microsemi Legacy Package 256\_FCBGA

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

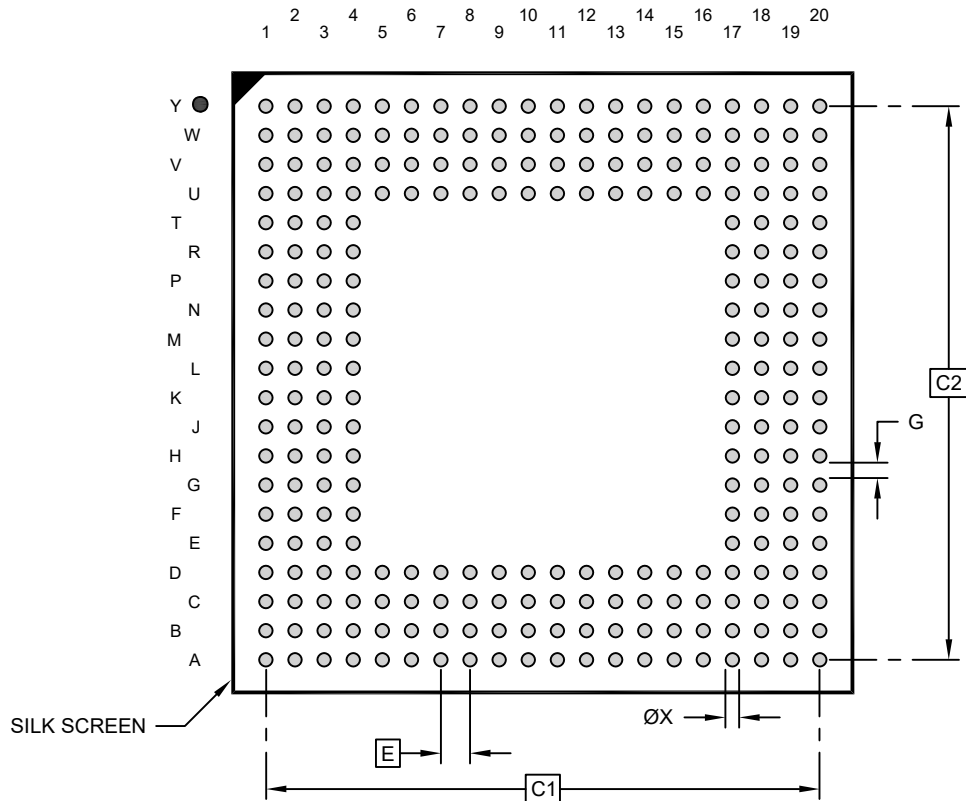

### RECOMMENDED LAND PATTERN

| Units                            |    | MILLIMETERS |     |      |
|----------------------------------|----|-------------|-----|------|
| Dimension Limits                 |    | MIN         | NOM | MAX  |
| Contact Pitch                    | E  | 1.27 BSC    |     |      |
| Contact Pad Spacing              | C1 | 24.13 BSC   |     |      |
| Contact Pad Spacing              | C2 | 24.13 BSC   |     |      |
| Contact Pad Diameter             | X  |             |     | 0.60 |
| Contact Pad to Contact Pad (Xnn) | G  | 0.67        |     |      |

#### Notes:

- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-27106 Rev A