



395-Ball Fine-Pitch Ball Grid Array Package (9DC) - 17x17x2.09 mm Body [FBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

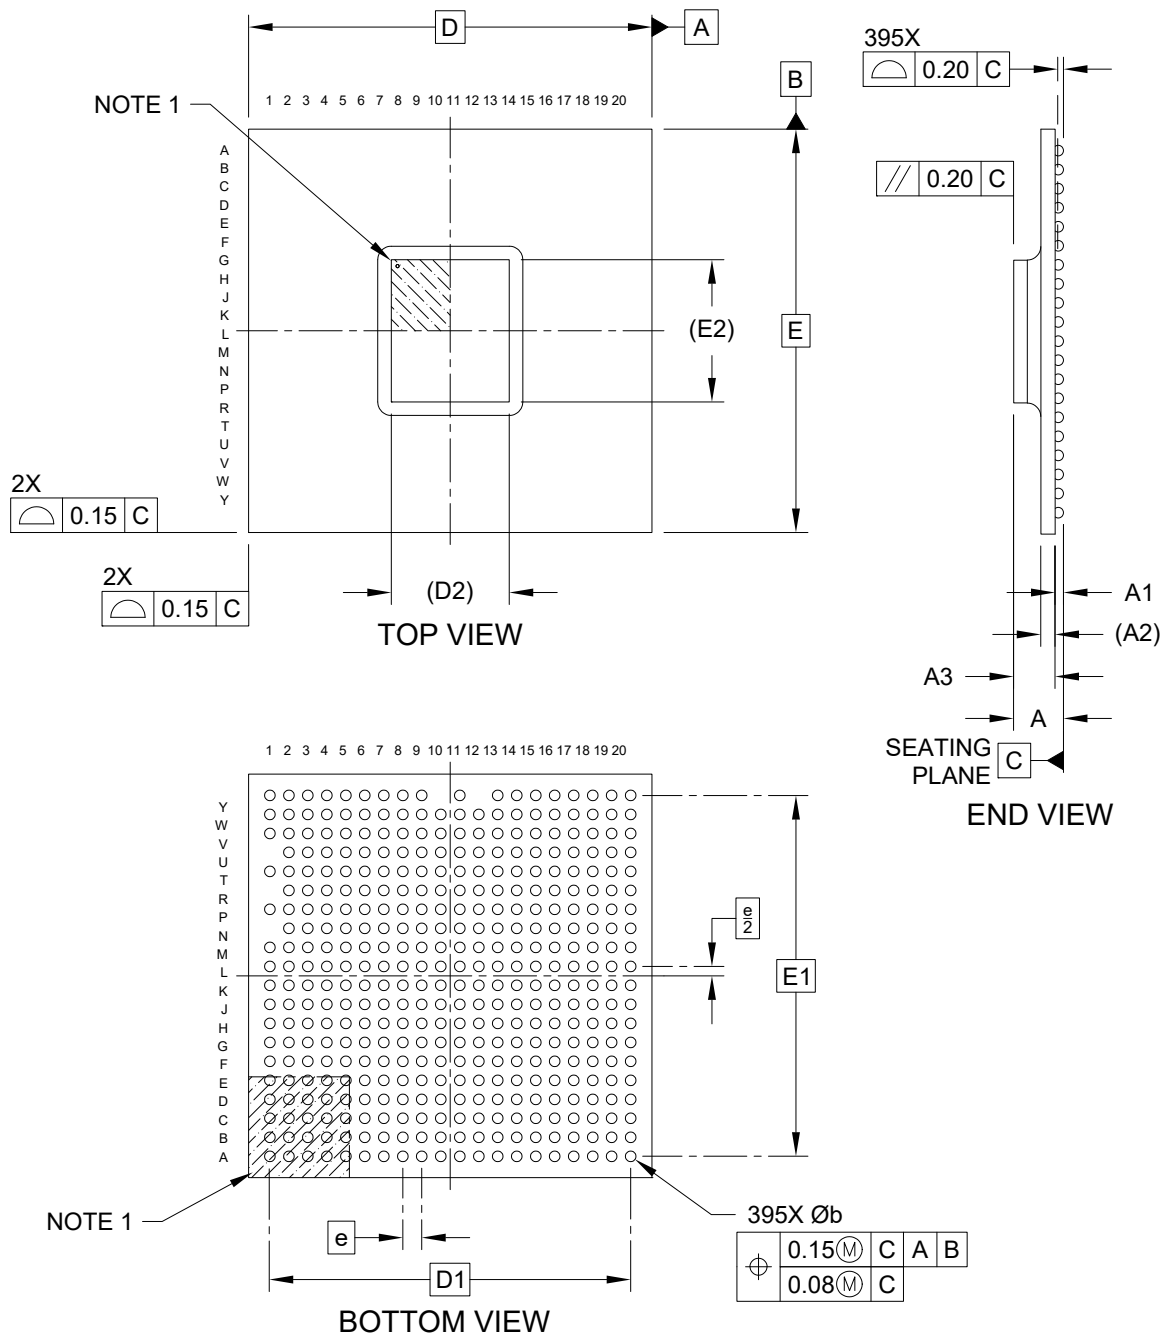

395-Ball Fine-Pitch Ball Grid Array Package (9DC) - 17x17x2.09 mm Body [FBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

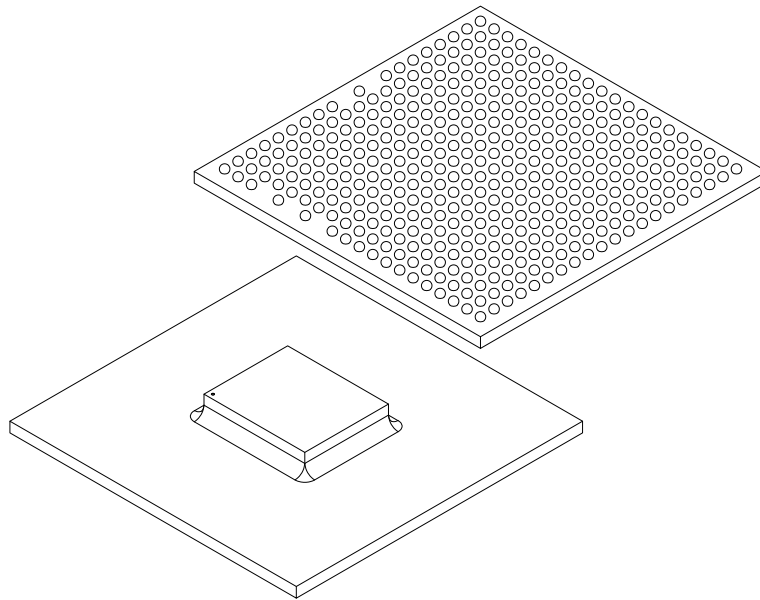


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		395		
Pitch	e		0.80 BSC		
Overall Height	A		1.53	1.81	2.09
Ball Height	A1		0.25	0.35	0.45
Substrate Thickness	A2		0.60 REF		
Package Thickness	A3		1.28	1.46	1.64
Overall Length	D		17.00 BSC		
Ball Array Length	D1		15.20 BSC		
Chip Length	D2		4.97 REF		
Overall Width	E		17.00 BSC		
Ball Array Width	E1		15.20 BSC		
Chip Width	E2		5.99 REF		
Ball Diameter	b		0.40	0.45	0.50

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

395-Ball Fine-Pitch Ball Grid Array Package (9DC) - 17x17x2.09 mm Body [FBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

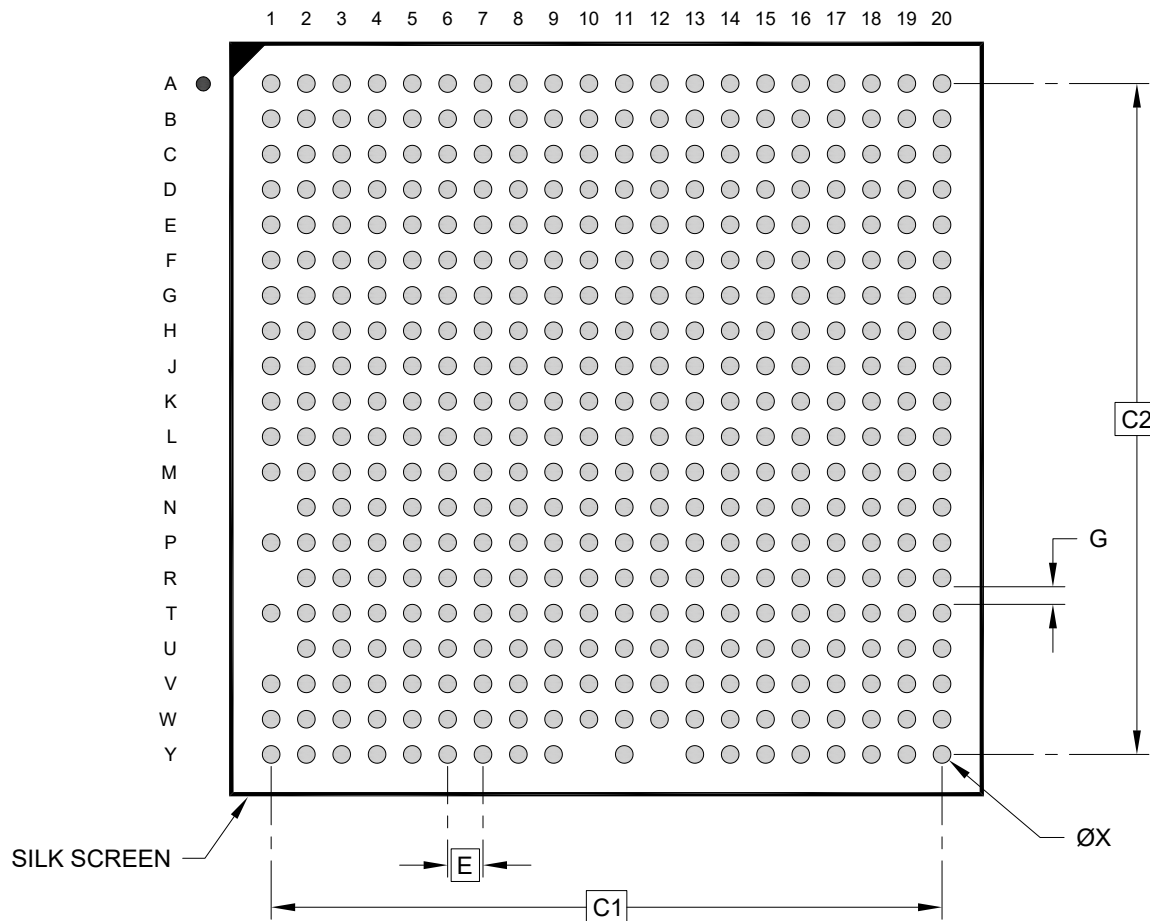

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Contact Pad Spacing	C1	15.20 BSC		
Contact Pad Spacing	C2	15.20 BSC		
Contact Pad Width (X395)	X			0.40
Contact Pad to Contact Pad	G	0.40		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-27133 Rev A