


Packaging Diagrams and Parameters

80-Lead Plastic Metric Quad Flatpack (AWC) - 14x14x2.15 mm Body [MQFP] 3.20 mm Footprint


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

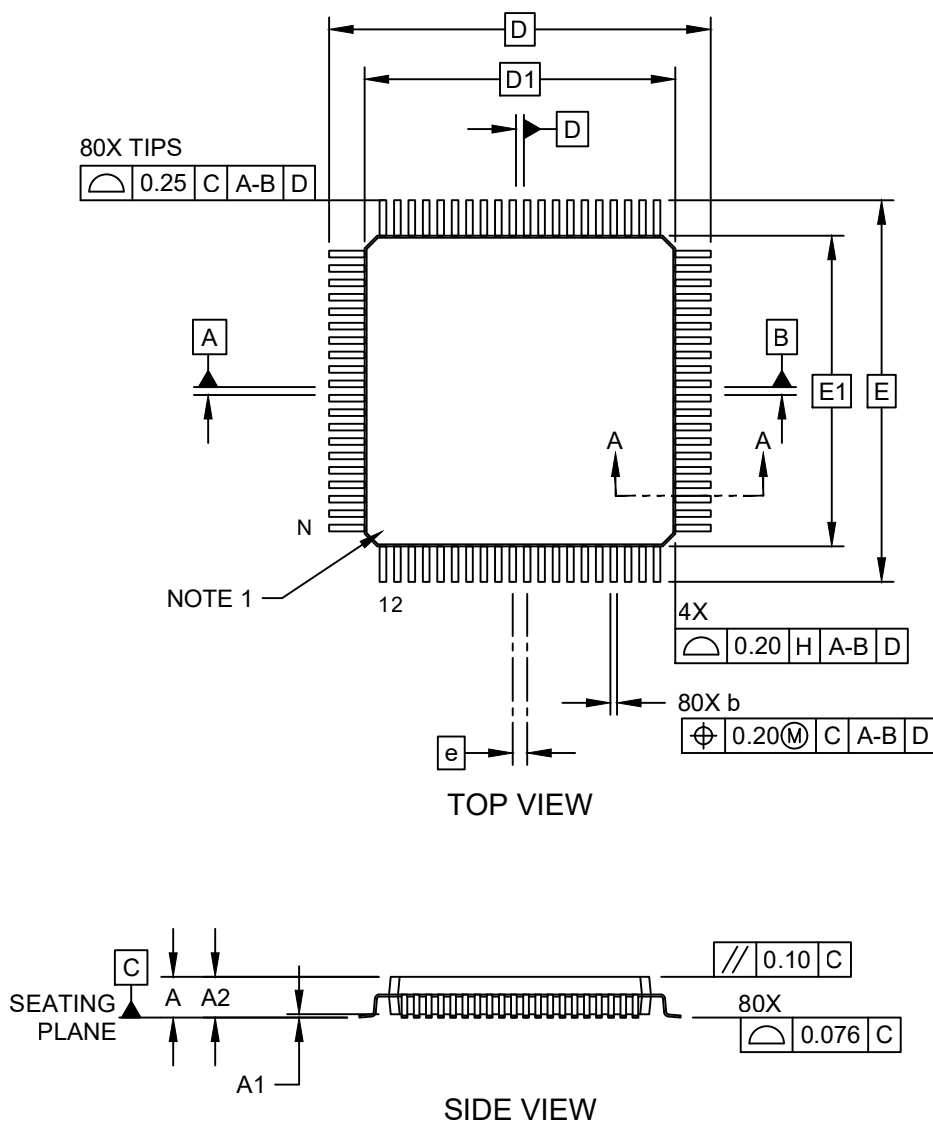

Packaging Diagrams and Parameters

80-Lead Plastic Metric Quad Flatpack (AWC) - 14x14x2.15 mm Body [MQFP] 3.20 mm Footprint

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

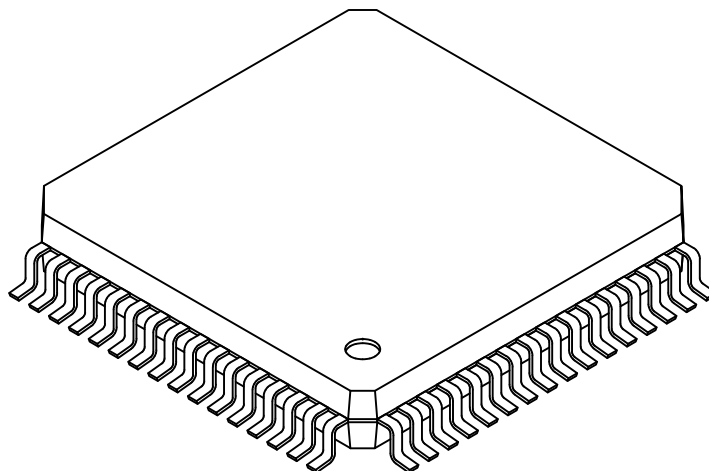

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Leads	N	80		
Lead Pitch	e	0.65 BSC		
Overall Height	A	2.05	2.15	2.35
Standoff	A1	0.10	0.15	0.25
Molded Package Thickness	A2	1.95	2.00	2.10
Foot Length	L	0.73	0.88	1.03
Footprint	L1	1.60 REF		
Foot Angle	θ	0°	-	7°
Overall Width	E	17.20 BSC		
Overall Length	D	17.20 BSC		
Molded Package Width	E1	14.00 BSC		
Molded Package Length	D1	14.00 BSC		
Lead Width	b	0.22	-	0.38
Mold Draft Angle Top	α	5°	-	16°


Notes:

- The Pin 1 visual index feature may vary, but it must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. The theoretically exact value is shown without tolerances.
REF: Reference Dimension, usually without tolerance, is for information purposes only.

Packaging Diagrams and Parameters

80-Lead Plastic Metric Quad Flatpack (AVC) - 14x14x2.15 mm Body [MQFP] 3.20 mm Footprint


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

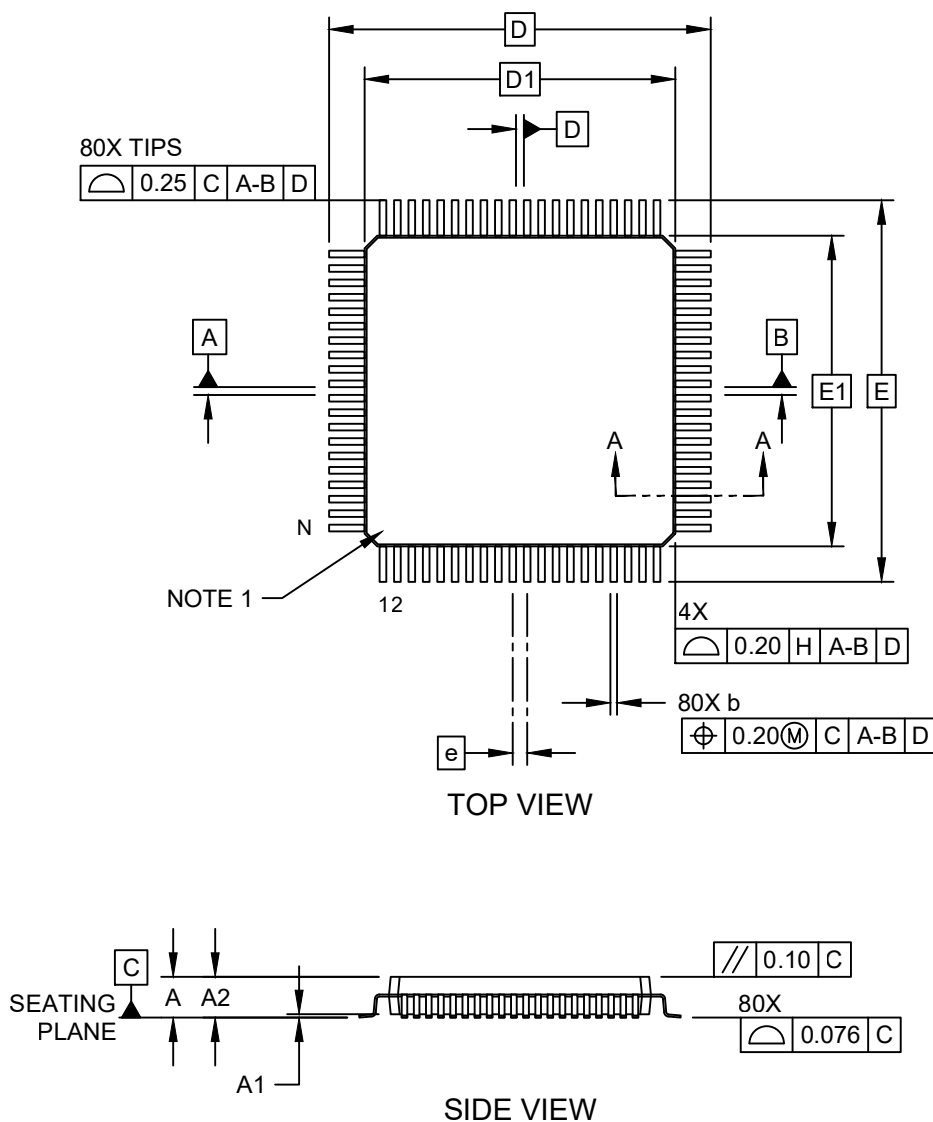

Packaging Diagrams and Parameters

80-Lead Plastic Metric Quad Flatpack (AVC) - 14x14x2.15 mm Body [MQFP] 3.20 mm Footprint

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

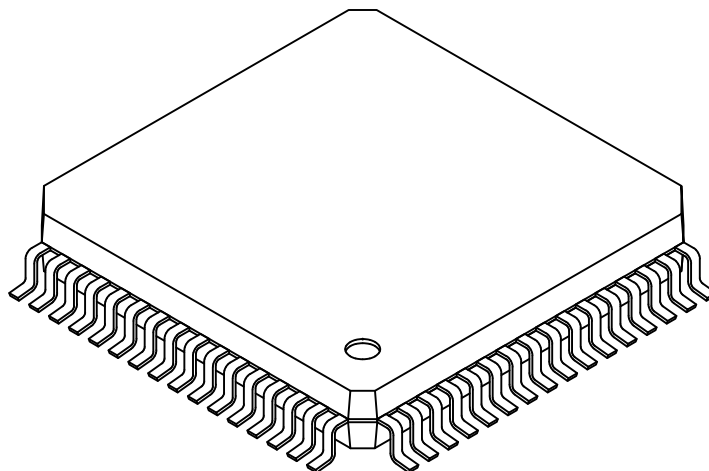

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Leads	N		80		
Lead Pitch	e		0.65 BSC		
Overall Height	A		2.05	2.15	2.35
Standoff	A1		0.10	0.15	0.25
Molded Package Thickness	A2		1.95	2.00	2.10
Foot Length	L		0.73	0.88	1.03
Footprint	L1		1.60 REF		
Foot Angle	θ		0°	-	7°
Overall Width	E		17.20 BSC		
Overall Length	D		17.20 BSC		
Molded Package Width	E1		14.00 BSC		
Molded Package Length	D1		14.00 BSC		
Lead Width	b		0.22	-	0.38
Mold Draft Angle Top	α		5°	-	16°


Notes:

- The Pin 1 visual index feature may vary, but it must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. The theoretically exact value is shown without tolerances.
REF: Reference Dimension, usually without tolerance, is for information purposes only.

Land Pattern

80-Lead Plastic Metric Quad Flatpack (AVC) - 14x14x2.15 mm Body [MQFP] 3.20 mm Footprint

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

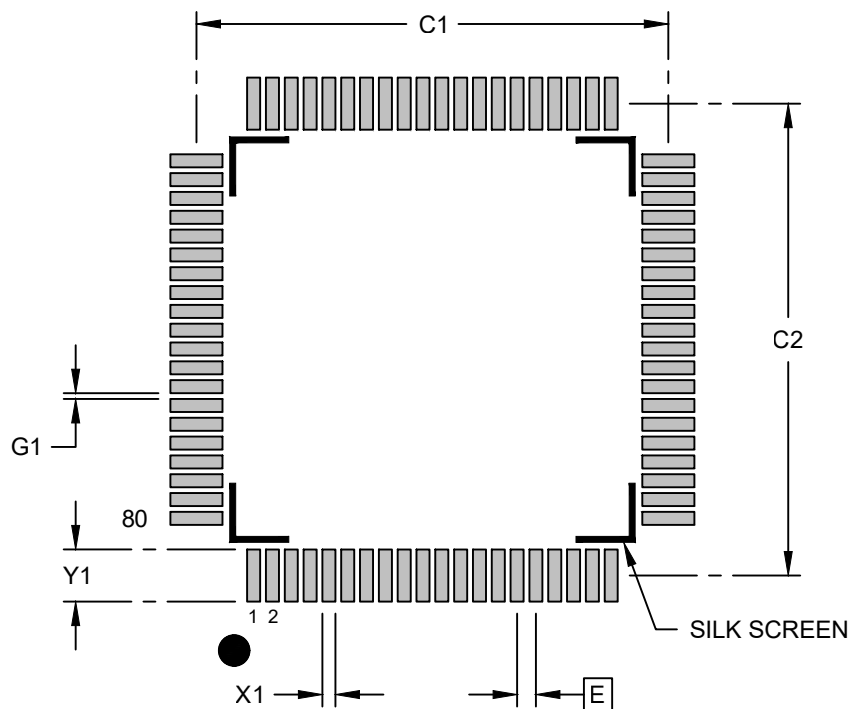

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.65 BSC		
Contact Pad Spacing	C1		16.30	
Contact Pad Spacing	C2		16.30	
Contact Pad Width (Xnn)	X1			1.80
Contact Pad Length (Xnn)	Y1			0.45
Contact Pad to Center Pad (X76)	G1	0.20		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. The theoretically exact value is shown without tolerances.
- For best soldering results, please refer to the current industry standard IPC-7093.