



672-Ball Thick Ball Grid Array (CHC) - 27x27x3.32 mm Body [BBGA] **Microsemi Legacy Package 672_FCBGA**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

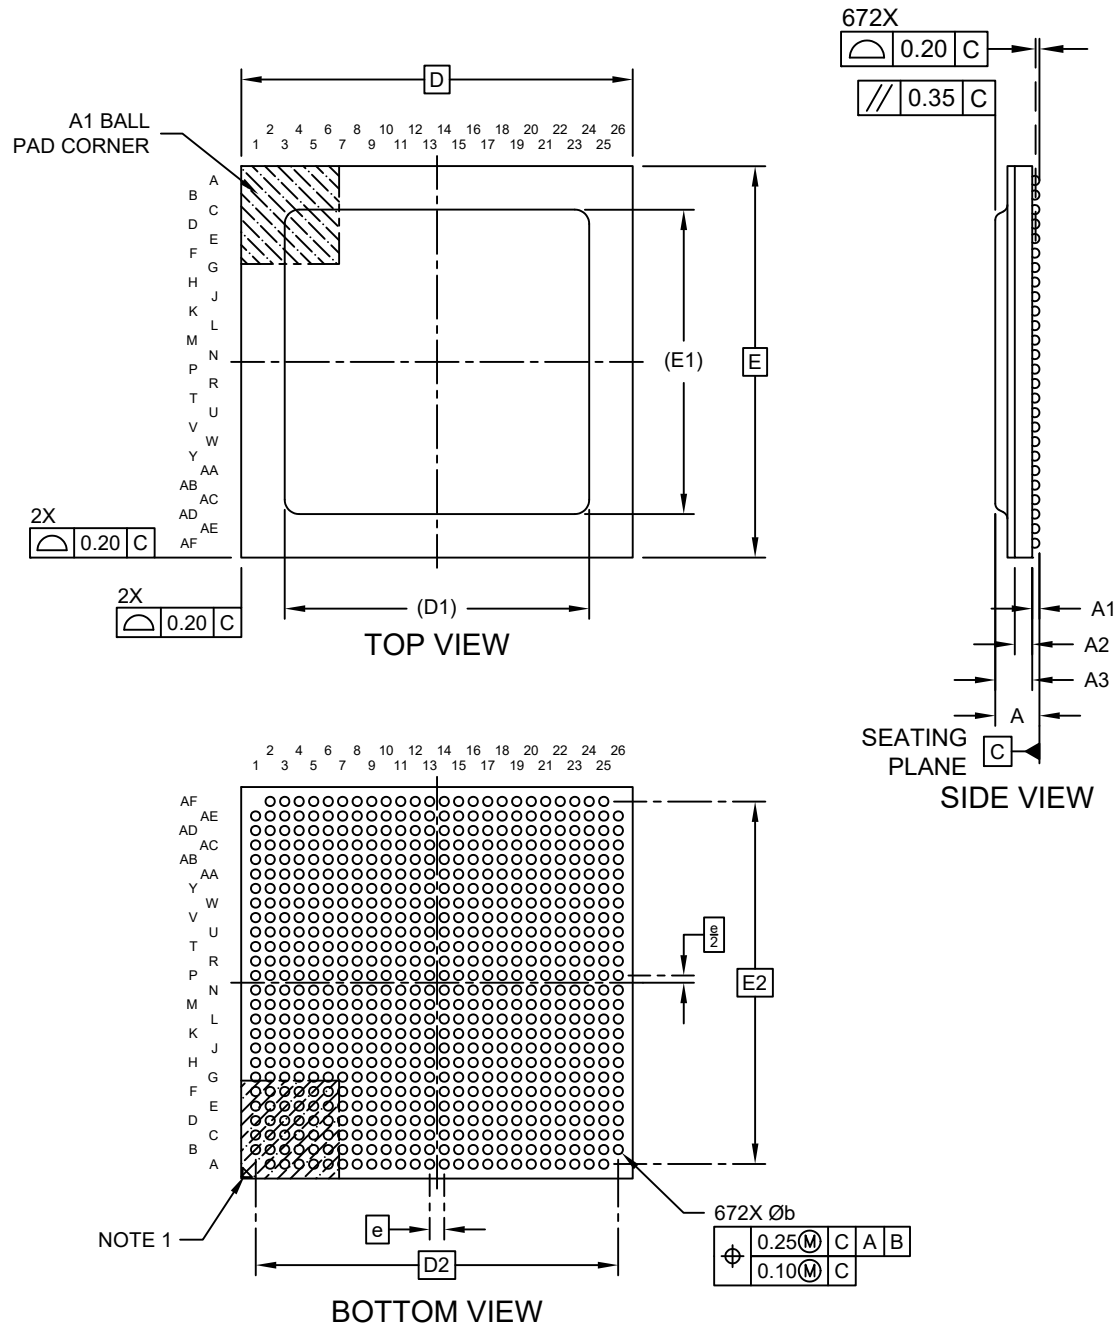

**672-Ball Thick Ball Grid Array (CHC) - 27x27x3.32 mm Body [BBGA]
Microsemi Legacy Package 672_FCBGA**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

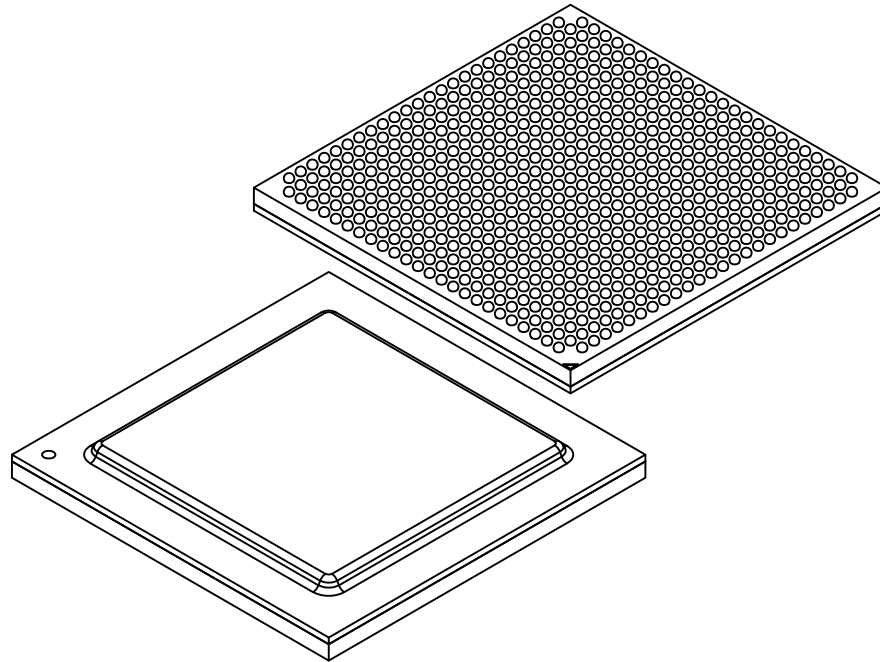


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	672		
Pitch	e	1.00 BSC		
Overall Height	A	2.76	3.04	3.32
Ball Height	A1	0.40	0.50	0.60
Substrate Thickness	A2	1.20 REF		
Package Thickness	A3	2.36	2.54	2.72
Overall Length	D	27.00 BSC		
Cap Length	D1	21.00 REF		
Ball Array Length	D2	25.00 BSC		
Overall Width	E	27.00 BSC		
Cap Width	E1	21.00 REF		
Ball Array Width	E2	25.00 BSC		
Ball Diameter	b	0.50	0.64	0.70

Notes:

1. Ball A1 visual index feature may vary, but must be located within the hatched area.
2. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

672-Ball Thick Ball Grid Array (CHC) - 27x27x3.32 mm Body [BBGA] Microsemi Legacy Package 672_FCBGA

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

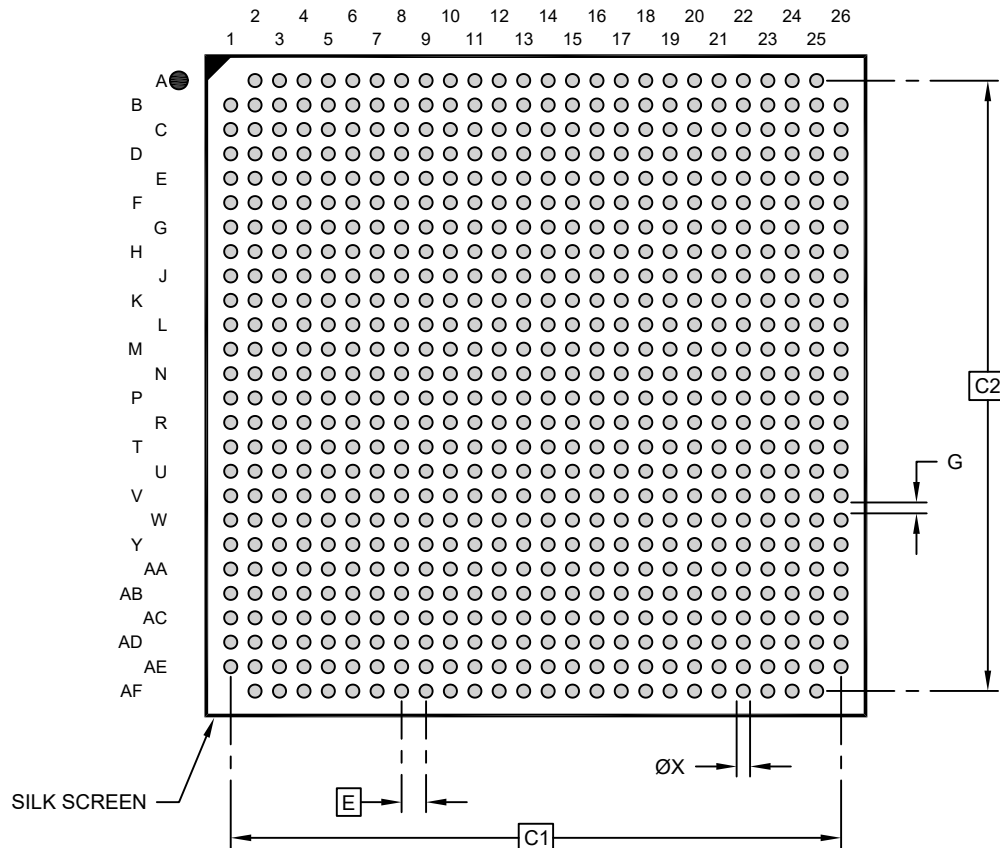

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	1.00 BSC		
Contact Pad Spacing	C1	25.00 BSC		
Contact Pad Spacing	C2	25.00 BSC		
Contact Pad Diameter (X672)	X			0.55
Contact Pad to Contact Pad	G	0.45		


Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-27209-CHC Rev A


672-Ball Thick Ball Grid Array (CLC) - 27x27x3.32 mm Body [BBGA] **Microsemi Legacy Package 672_FCBGA**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

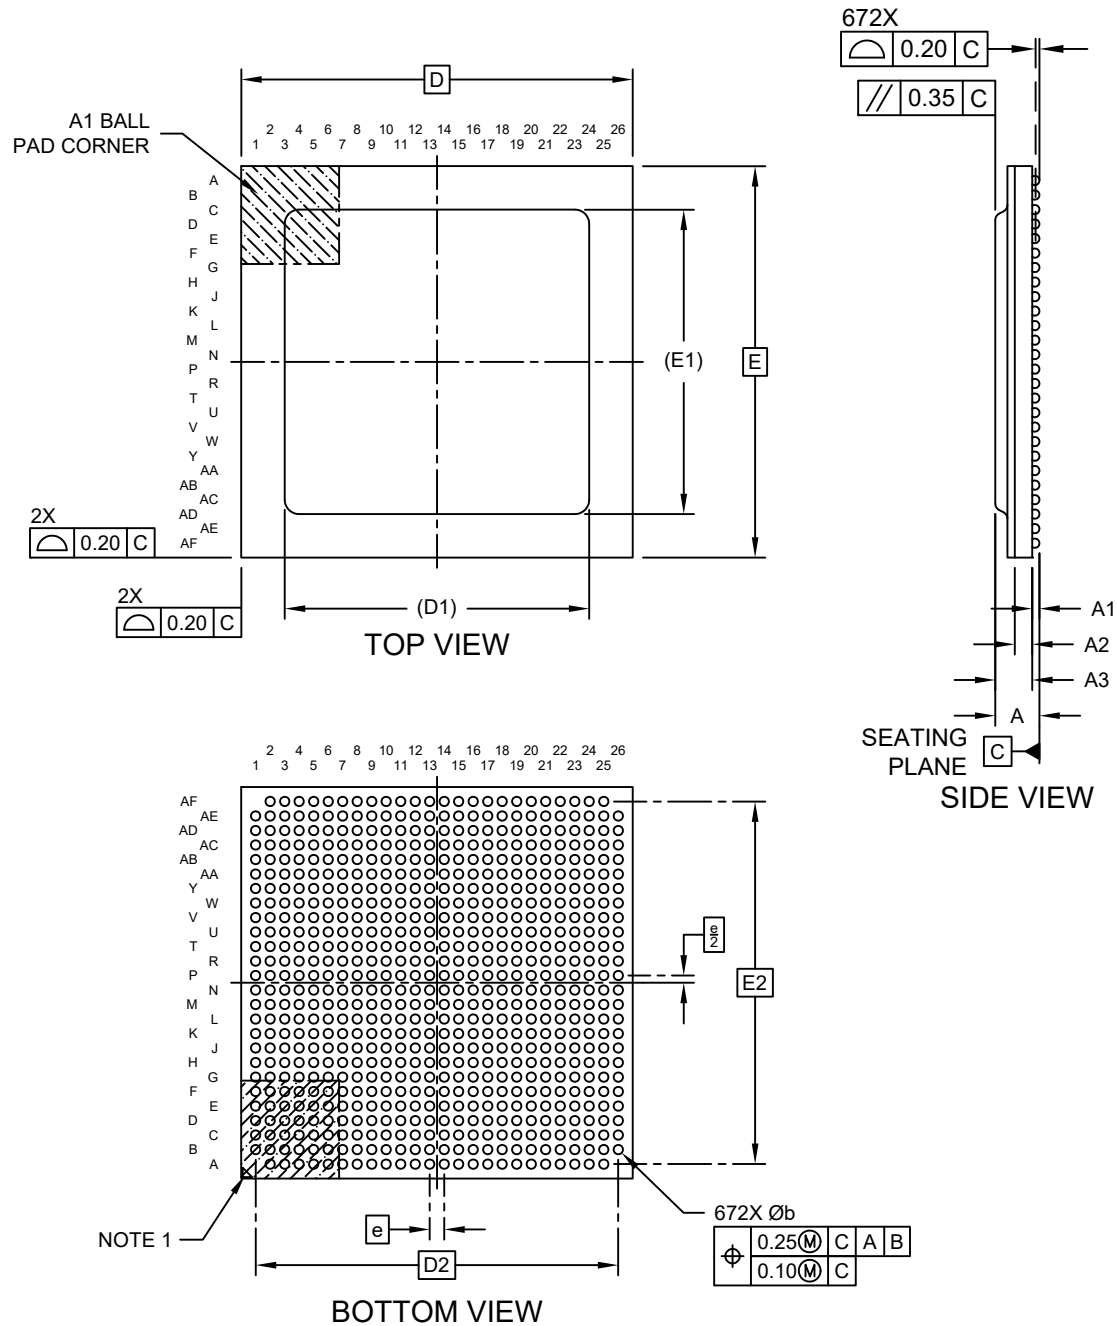

**672-Ball Thick Ball Grid Array (CLC) - 27x27x3.32 mm Body [BBGA]
Microsemi Legacy Package 672_FCBGA**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

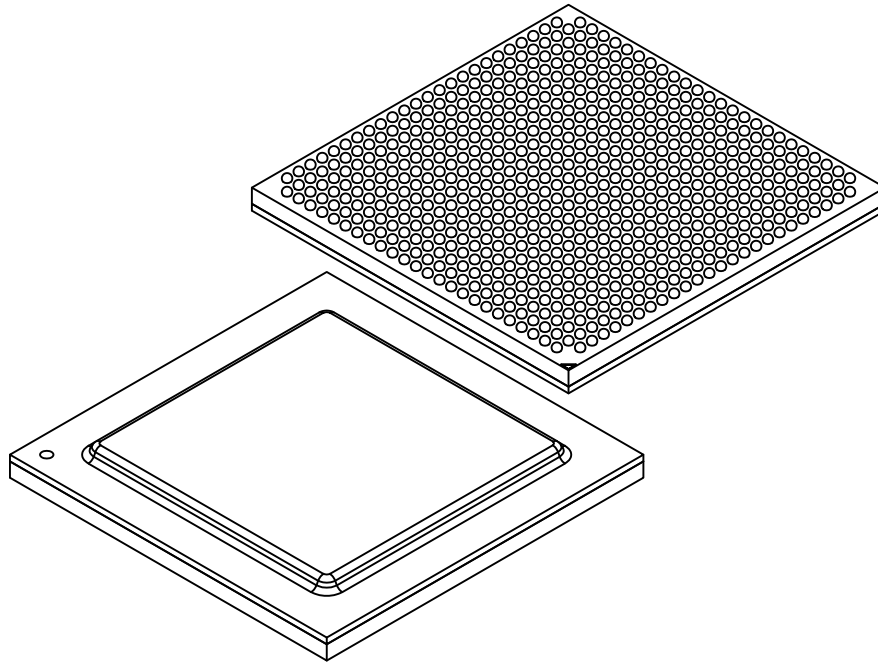


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	672		
Pitch	e	1.00 BSC		
Overall Height	A	2.76	3.04	3.32
Ball Height	A1	0.40	0.50	0.60
Substrate Thickness	A2	1.20 REF		
Package Thickness	A3	2.36	2.54	2.72
Overall Length	D	27.00 BSC		
Cap Length	D1	21.00 REF		
Ball Array Length	D2	25.00 BSC		
Overall Width	E	27.00 BSC		
Cap Width	E1	21.00 REF		
Ball Array Width	E2	25.00 BSC		
Ball Diameter	b	0.50	0.64	0.70

Notes:

1. Ball A1 visual index feature may vary, but must be located within the hatched area.
2. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

672-Ball Thick Ball Grid Array (CLC) - 27x27x3.32 mm Body [BBGA] Microsemi Legacy Package 672_FCBGA

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

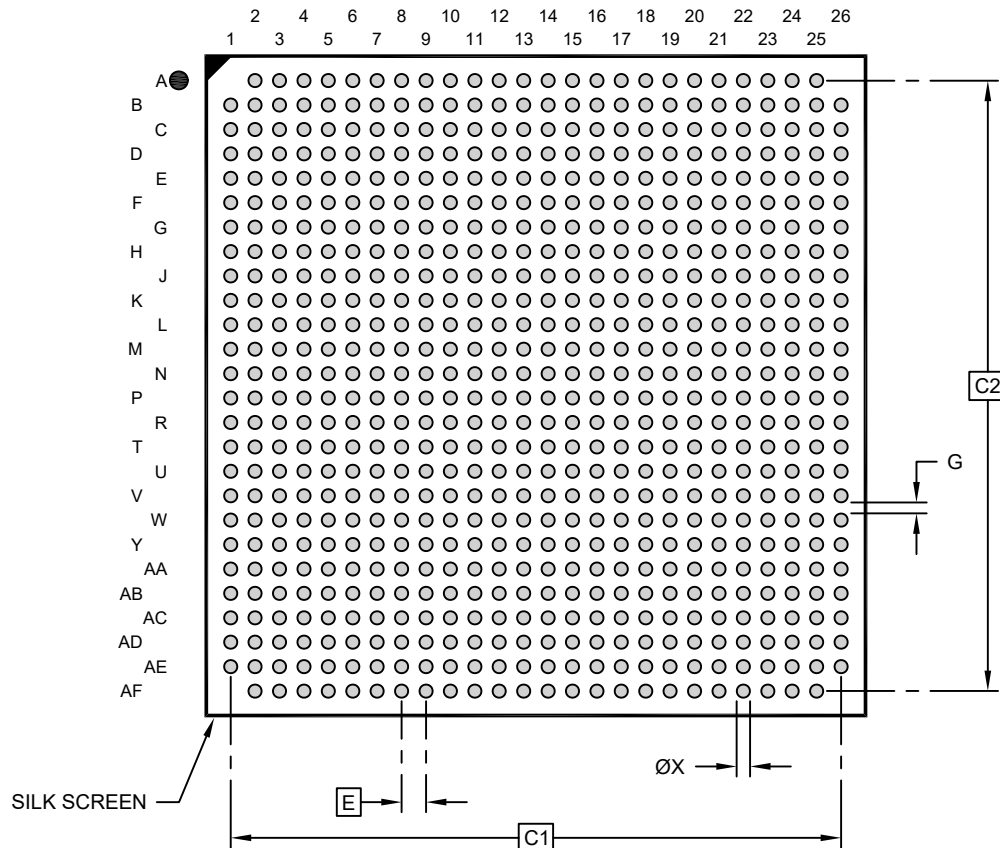

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	1.00 BSC		
Contact Pad Spacing	C1	25.00 BSC		
Contact Pad Spacing	C2	25.00 BSC		
Contact Pad Diameter (X672)	X			0.55
Contact Pad to Contact Pad	G	0.45		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-27209-CLC Rev A