



81-Ball Low Profile Plastic Ball Grid Array (JHC) - 10x10x1.47 mm Body [LBGA] Microsemi Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/package3>

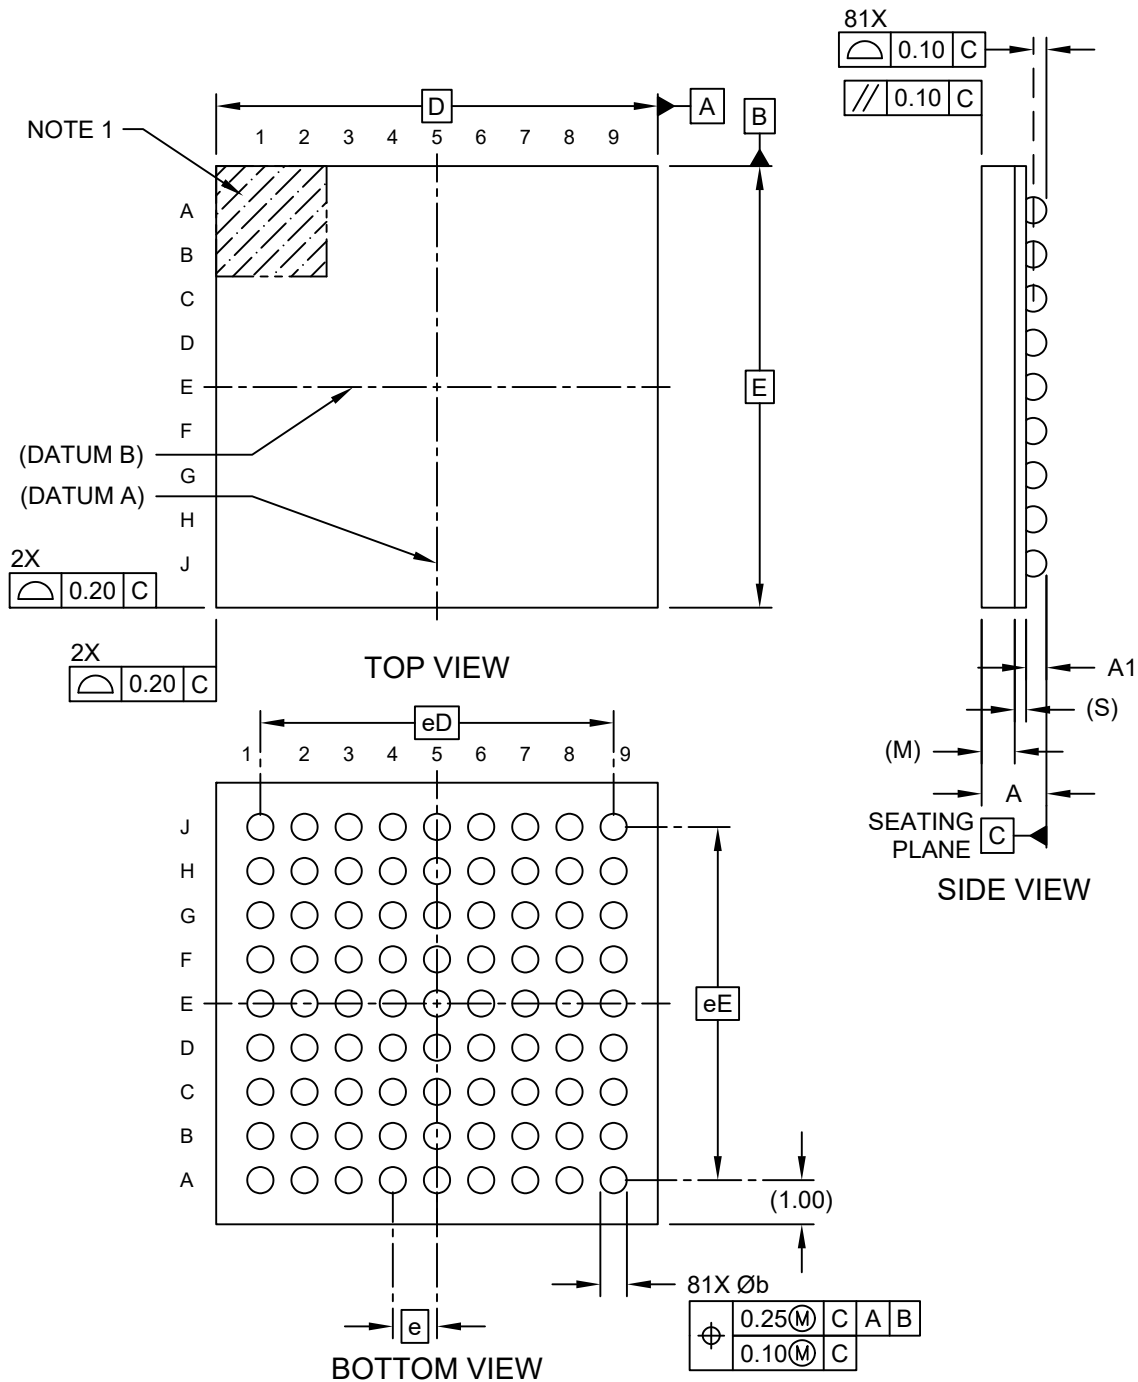

81-Ball Low Profile Plastic Ball Grid Array (JHC) - 10x10x1.47 mm Body [LBGA] Microsemi Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

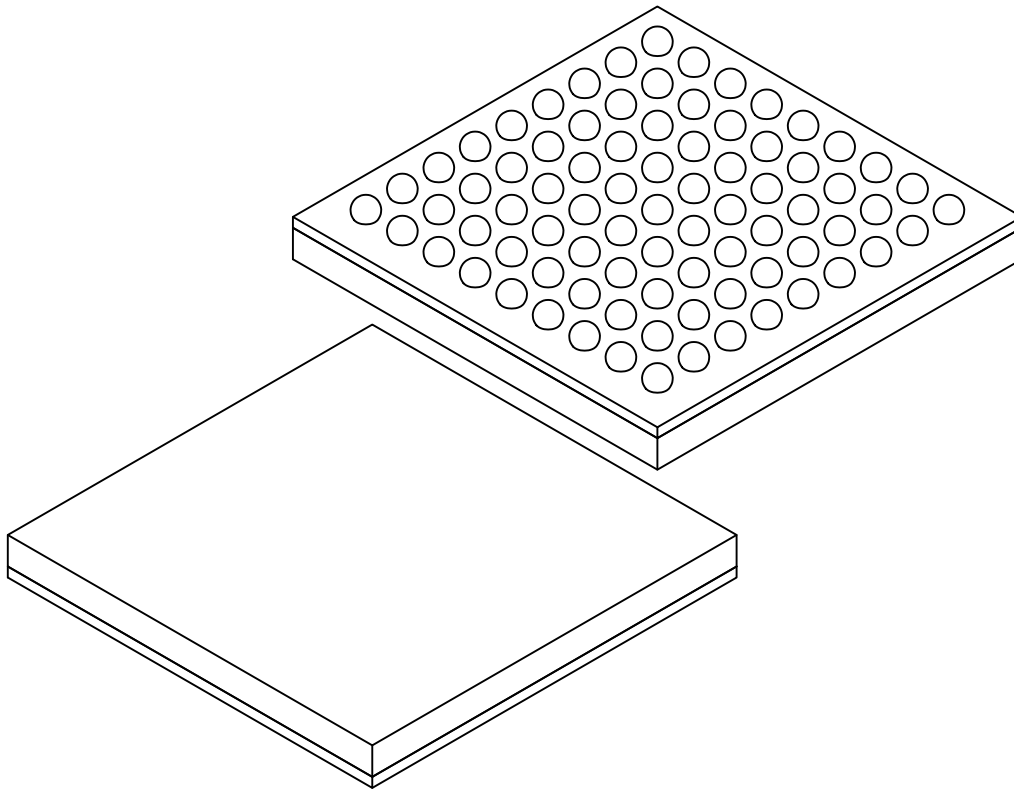


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	81		
Pitch	e	1.00 BSC		
Overall Height	A	1.28	1.37	1.50
Standoff	A1	0.36	0.41	0.46
Substrate Thickness	S	0.26 REF		
Mold Cap Height	M	0.70 REF		
Overall Length	D	10.00 BSC		
Overall Ball Spacing	eD	8.00 BSC		
Overall Width	E	10.00 BSC		
Overall Ball Spacing	eE	8.00 BSC		
Ball Diameter	b	0.44	0.54	0.64

Notes:

1. Terminal A1 visual index feature may vary, but must be located within the hatched area.
2. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

81-Ball Low Profile Plastic Ball Grid Array (JHC) - 10x10x1.47 mm Body [LBGA] Microsemi Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

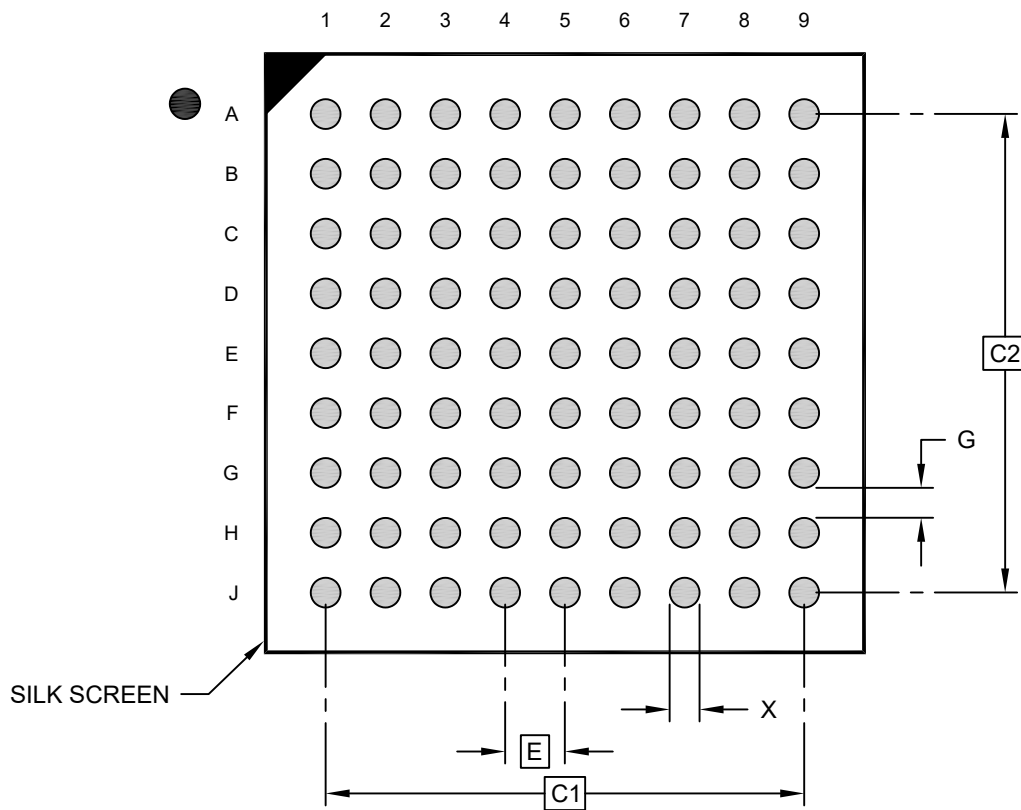

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	1.00 BSC		
Contact Pad Spacing	C1	8.00 BSC		
Contact Pad Spacing	C2	8.00 BSC		
Contact Pad Width (Xnn)	X			0.50
Contact Pad to Contact Pad (Xnn)	G	0.50		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-27340 Rev B