Industriegebiet Brohltal Ost · Im Stiefelfeld 1 · D-56651 Niederzissen · www.akro-plastic.com

PA6.6 – Polyamide 6.6 PA66+PA6I/6T GF50

AKROLOY® PA GF 50 8 black (6732)

Tensile modulus	Stress at break	Charpy impact strength
17500 MPa	**260 MPa**	**105 kJ/m²**
1 mm/min	**5 mm/min**	**23°C**
ISO 527-2	ISO 527-2	ISO 179-1/1eU

AKROLOY® PA GF 50 8 black (6732) is a 50% glass fibre reinforced, semi-aromatic polyamide blend with very high stiffness and strength, as well as reduced moisture absorption.

Typical applications

Components with tight dimensional tolerances even under high mechanical load. It is a very cost effective alternative for zinc- and aluminium diecast alloys.

Mechanical Properties

Tensile modulus (1 mm/min | ISO 527-2)	
d.a.m.	17500 MPa
conditioned	16000 MPa
Stress at break (5 mm/min | ISO 527-2)	
d.a.m.	260 MPa
conditioned	185 MPa
Strain at break (5 mm/min | ISO 527-2)	
d.a.m.	2,4 %
conditioned	2,4 %
Flexural modulus (2 mm/min | ISO 178)	
d.a.m.	16500 MPa
conditioned	15000 MPa
Flexural strength (2 mm/min | ISO 178)	
d.a.m.	385 MPa
conditioned	285 MPa
Flexural strain at break (2 mm/min | ISO 178)	
d.a.m.	2,8 %
conditioned	2,9 %
Charpy impact strength (23°C | ISO 179-1/1eU)	
d.a.m.	105 kJ/m²
conditioned	105 kJ/m²
Charpy impact strength (-30°C | ISO 179-1/1eU)	
d.a.m.	95 kJ/m²
conditioned	95 kJ/m²
Charpy notched impact strength (23°C | ISO 179-1/1eA)	
d.a.m.	17 kJ/m²
conditioned	17 kJ/m²
Charpy notched impact strength (-30°C | ISO 179-1/1eA)	
d.a.m.	17 kJ/m²
conditioned	17 kJ/m²

Thermal Properties

Temperature of deflection under load HDT/A (1,8 MPa | ISO 75)	245 °C
Temperature of deflection under load HDT/C (8 MPa | ISO 75)	185 °C
Melting temperature (DSC, 10K/min | DIN EN ISO 11357-3)	255 °C

Disclaimer:
All specifications and information given on this website are based on our current knowledge and experience. A legally binding promise of certain characteristics or suitability for a concrete individual case cannot be derived from this information. The information supplied here is not intended to release processors and users from the responsibility of carrying out their own tests and inspections in each concrete individual case. AKRO®, AKROMID®, AKROLEN®, AKROLOY®, AKROTEK®, ICX® and PRECITE® are registered trademarks of the Feddersen Group.

Industriegebiet Brohltal Ost · Im Stiefelfeld 1 · D-56651 Niederzissen · www.akro-plastic.com

General properties

Density (23°C | ISO 1183)	1,56 g/cm³
Humidity absorption (70°C, 62% r.H. | ISO 1110)	1,3-1,5 %
Molding shrinkage (flow | ISO 294-4)	0,1-0,3 %
Molding shrinkage (transverse | ISO 294-4)	0,3-0,5 %

Disclaimer:
All specifications and information given on this website are based on our current knowledge and experience. A legally binding promise of certain characteristics or suitability for a concrete individual case cannot be derived from this information. The information supplied here is not intended to release processors and users from the responsibility of carrying out their own tests and inspections in each concrete individual case. AKRO®, AKROMID®, AKROLEN®, AKROLOY®, AKROTEK®, ICX® and PRECITE® are registered trademarks of the Feddersen Group.

Industriegebiet Brohltal Ost · Im Stiefelfeld 1 · D-56651 Niederzissen · www.akro-plastic.com

PA6.6 – Polyamide 6.6 PA66+PA6I/6T GF50

AKROLOY® PA GF 50 8 black (6732)

Processing information

The listed values are recommendations. Higher values should be used for higher glass loadings. We recommend only de-humidifying or vacuum dryers. Extensive drying can cause filling problems and surface defects.

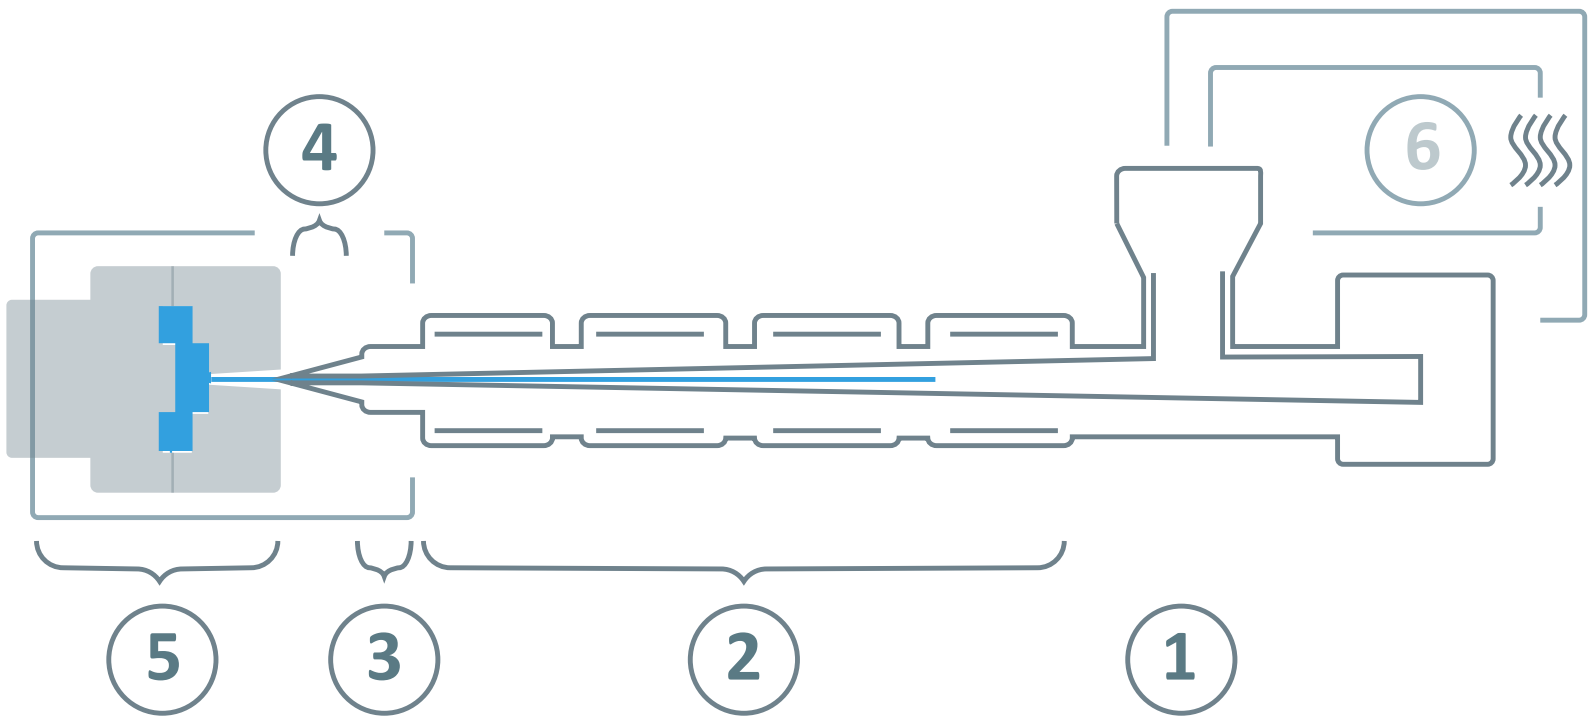

6	Drying time	0 - 4 h
	Drying temperature (τ ≤ -30°C)	80°C
	Processing moisture	0,02 - 0,1%
1	Feed section	60 - 80°C
2	Temperature zone 1 - Zone 4	260 - 300°C
3	Nozzle temperature	270 - 300°C
4	Melt temperature	280 - 300°C
5	Mold temperature	90 - 130°C
→	Holding pressure, spec.	300 - 800 bar
←	Back pressure, spec.	50 - 150 bar
	Injection speed	medium to high
	Screw speed	8 - 15 m/min

Disclaimer:
All specifications and information given on this website are based on our current knowledge and experience. A legally binding promise of certain characteristics or suitability for a concrete individual case cannot be derived from this information. The information supplied here is not intended to release processors and users from the responsibility of carrying out their own tests and inspections in each concrete individual case. AKRO®, AKROMID®, AKROLEN®, AKROLOY®, AKROTEK®, ICX® and PRECITE® are registered trademarks of the Feddersen Group.