

PA6.6 – Polyamide 6.6 PA66-I GF13

AKROMID® A3 GF 13 S3 black (3768)

Tensile modulus

5200 MPa

1 mm/min

ISO 527-2

Stress at break

125 MPa

5 mm/min

ISO 527-2

Charpy impact strength

75 kJ/m²

23°C

ISO 179-1/1eU

AKROMID® A3 GF 13 S3 black (3768) is a 13% glass fibre reinforced, dry impact resistant polyamide 6.6 with average stiffness and strength

Typical applications

Mainly components in mechanical engineering and in the automotive industry

**Mechanical Properties**

Tensile modulus (1 mm/min ISO 527-2) d.a.m.	5200 MPa
Stress at break (5 mm/min ISO 527-2) d.a.m.	125 MPa
Strain at break (5 mm/min ISO 527-2) d.a.m.	4 %
Flexural modulus (2 mm/min ISO 178) d.a.m.	4800 MPa
Flexural strength (2 mm/min ISO 178) d.a.m.	180 MPa
Charpy impact strength (23°C ISO 179-1/1eU) d.a.m.	75 kJ/m ²
Charpy impact strength (-30°C ISO 179-1/1eU) d.a.m.	55 kJ/m ²
Charpy notched impact strength (23°C ISO 179-1/1eA) d.a.m.	11 kJ/m ²
Charpy notched impact strength (-30°C ISO 179-1/1eA) d.a.m.	6 kJ/m ²

**Thermal Properties**

Temperature of deflection under load HDT/A (1,8 MPa ISO 75)	244 °C
Temperature of deflection under load HDT/B (0,45 MPa ISO 75)	261 °C
Melting temperature (DSC, 10K/min DIN EN ISO 11357-3)	260 °C

**General properties**

Density (23°C ISO 1183)	1,2 g/cm ³
Molding shrinkage (flow ISO 294-4)	0,3 %
Molding shrinkage (transverse ISO 294-4)	0,9 %


Disclaimer:

All specifications and information given on this website are based on our current knowledge and experience. A legally binding promise of certain characteristics or suitability for a concrete individual case cannot be derived from this information. The information supplied here is not intended to release processors and users from the responsibility of carrying out their own tests and inspections in each concrete individual case. AKRO®, AKROMID®, AKROLEN®, AKROLOY®, AKROTEK®, ICX® and PRECITE® are registered trademarks of the Feddersen Group.

PA6.6 – Polyamide 6.6 PA66-I GF13

AKROMID® A3 GF 13 S3 black (3768)**Processing information**

The listed values are recommendations. Higher values should be used for higher glass loadings. We recommend only dehumidifying or vacuum dryers. Extensive drying can cause filling problems and surface defects.

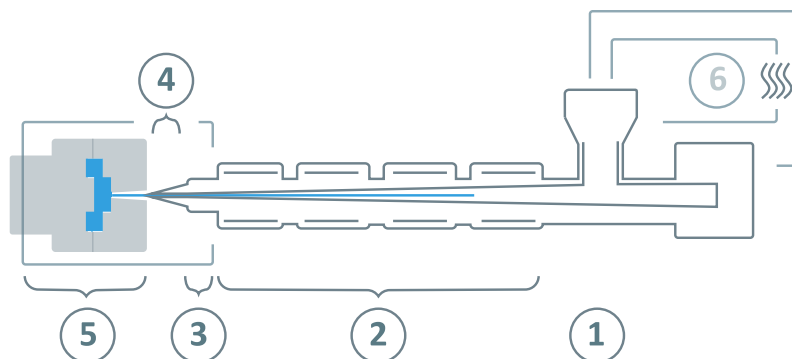

⑥	Drying time	0 - 4 h
	Drying temperature ($\tau \leq -30^{\circ}\text{C}$)	80°C
	Processing moisture	0,02 - 0,1%
①	Feed section	60 - 80°C
②	Temperature zone 1 - Zone 4	260 - 300°C
③	Nozzle temperature	270 - 310°C
④	Melt temperature	280 - 300°C
⑤	Mold temperature	80 - 100°C
→	Holding pressure, spec.	300 - 800 bar
←	Back pressure, spec.	50 - 150 bar
	Injection speed	medium to high
	Screw speed	8 - 15 m/min

Disclaimer:

All specifications and information given on this website are based on our current knowledge and experience. A legally binding promise of certain characteristics or suitability for a concrete individual case cannot be derived from this information. The information supplied here is not intended to release processors and users from the responsibility of carrying out their own tests and inspections in each concrete individual case. AKRO®, AKROMID®, AKROLEN®, AKROLOY®, AKROTEK®, ICX® and PRECITE® are registered trademarks of the Feddersen Group.