


WAKECAP POWER SOLUTIONS

Product Catalogue

Off-Grid Solar Power Systems for Remote Equipment

WP-30 • WP-60 • WP-400T • WP-900T

WC-PS-PC-v1.0 | February 2026

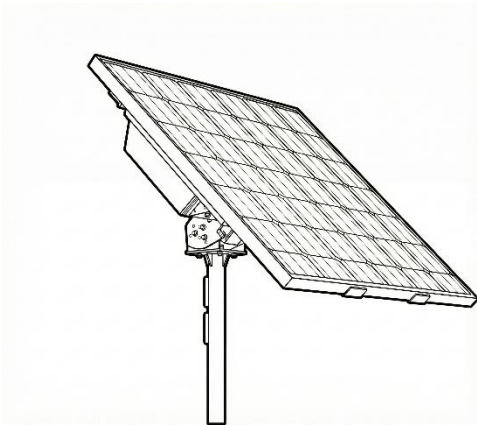

80W

Solar Power

384Wh

Battery

8W

Recommended Load

WakeCap Power 30

WP-30

80W Solar | 384Wh LiFePO₄ | Off-Grid Power System for Gateways

Ultra-compact, pole-mounted solar power system for lightweight remote equipment. Integrated solar controller with BMS, LiFePO₄ battery, and IP66 enclosure for harsh desert and coastal environments.

KEY FEATURES

- ✓ Integrated solar controller and BMS
- ✓ LiFePO₄ battery, 2000–5000 cycle life
- ✓ IP66 dust-tight, water-jet resistant
- ✓ LED indicators: charge, output, battery
- ✓ RS485 remote monitoring (work-in-progress)
- ✓ Pole/wall mount (60–150mm pole)

TECHNICAL SPECIFICATIONS

Parameter	Value	Unit
Model	G8030 (TD-G8030)	—
Solar Panels	2 x 40W Grade-A Mono	80W total
Panel Efficiency	≥23%	—
Battery	LiFePO ₄ , 2P4S	30Ah / 384Wh
Output Voltage	12 ±0.5 V DC	—
Max Output Current	3A	—

Parameter	Value	Comment
Runtime (no solar)	8–10 days @150mA	—
Recharge Time	8–10 hours	—
Operating Temp	-20 to +50°C	—
Protection	IP66	—
Dimensions (panels)	390×530×17 mm (×2)	—
Installation	Pole / Wall Mount	—



WakeCap Power 60

WP-60

100W Solar | 768Wh LiFePO₄ | Off-Grid Power System for Small Camera/Load

Modular pole-mounted solar power system for medium-demand remote equipment equipped with solar controller, smart BMS, 60Ah LiFePO₄ battery, and aviation-style waterproof connectors for reliable field connections.

KEY FEATURES

- ✓ Integrated solar controller with smart BMS
- ✓ 60Ah LiFePO₄ with integrated BMS
- ✓ N-Type A+ Grade mono panels, >22%
- ✓ Aviation waterproof connectors
- ✓ Adjustable panel tilt 0–30°
- ✓ Controller self-consumption: 0.06W

100W

Solar Power

768Wh

Battery


15W

Recommended Load

TECHNICAL SPECIFICATIONS

Parameter	Value	Comment
Model	TS-100W60AH	—
Solar Panels	2 x 50W N-Type A+ Mono	100W total
Panel Efficiency	>22%	—
Battery	LiFePO ₄	60Ah / 768Wh
Voltage Range	10.5–12.6 V DC	—
Max Current (In/Out)	10A / 10A	—

Parameter	Value	Comment
MPPT Efficiency	96.5%	—
Operating Temp	-30 to +85°C	—
Protection	IP66	—
System Weight	23 kg	—
Package Size	940×780×240 mm	—
Output Connector	5.5×2.1mm DC	—

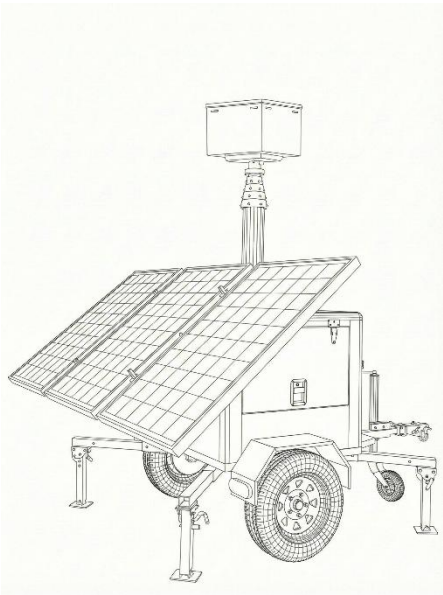

WakeCap Power 400

WP-400T

450W Solar | 4800Wh GEL | Trailer-Mounted Power Station

Mobile trailer-mounted solar power station for temporary and semi-permanent deployments. 6.5m pneumatic mast, 400Ah GEL battery bank, and integrated equipment cabinet with thermal management.

KEY FEATURES

- ✓ 6.5m pneumatic mast (5 sections, Al alloy)
- ✓ 2x200Ah LEOCH Lead Acid batteries (400Ah)
- ✓ 30A MPPT charge controller
- ✓ Equipment cabinet with fan cooling
- ✓ Single-axle US-standard trailer
- ✓ Anti-oxidation powder coat finish

450W

Solar Power

4.8kWh


Battery

100W

Recommended Load

TECHNICAL SPECIFICATIONS

Parameter	Value	Comment	Parameter	Value	Comment
Model	[TBD]	—	Mast	Pneumatic, 6.5m	5 sections
Solar Panels	3 x 150W Monocrystalline	450W total	System Weight	525 kg	—
Battery	GEL Deep Cycle (LEOCH)	400Ah / 4800Wh	Packed Size	2000x1400x2300 mm	—
System Voltage	12 V DC	—	Deployed Size	2000x2250x6500 mm	—
MPPT Rating	30A	—	Trailer	Single Axle, Ball Hitch	165/70R13
Runtime (180W load)	~25 hours	—	Protection	IP65	2yr warranty

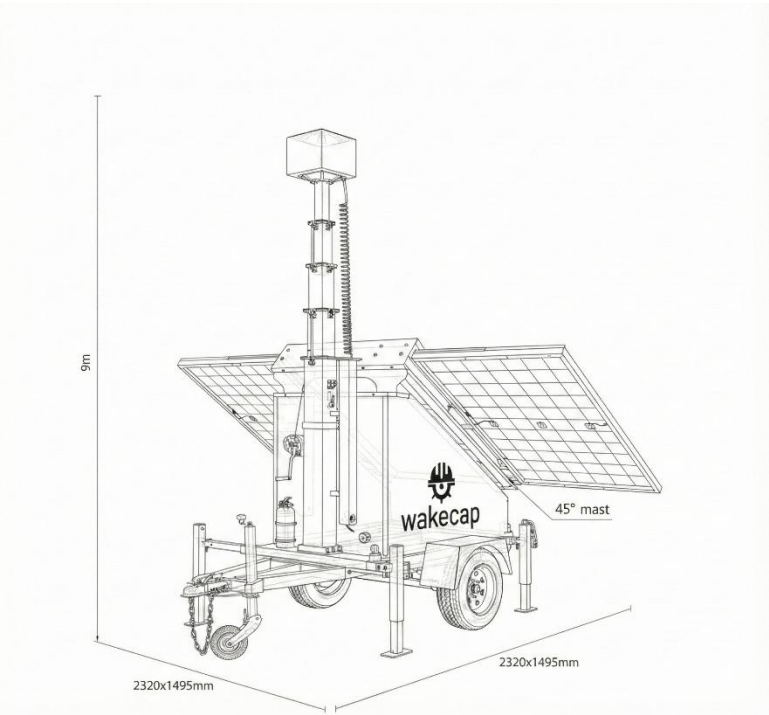

WakeCap Power 900

WP-900T

1305W Solar | 21.6kWh Lead Acid | Heavy-Duty Trailer Power Station

Highest-capacity trailer power station in the WakeCap portfolio. 9m manual mast, 900Ah high-temperature lead-acid battery bank (24V), and EPEVER 60A MPPT controller for heavy-duty applications.

KEY FEATURES

- ✓ 9m manual mast with CAT6 + power routing
- ✓ 6×150Ah lead-acid batteries (3S2P, 24V)
- ✓ EPEVER 60A MPPT, 98% efficiency
- ✓ 3×435W mono panels (1305W total)
- ✓ Camera box 412×412×416mm
- ✓ 100 km/h wind rated, 8 per 40ft container

1305W
Solar Power

21.6kWh
Battery

350W
Recommended Load

TECHNICAL SPECIFICATIONS

Parameter	Value	Comment
Model	VTS3P	—
Solar Panels	3 x 435W Monocrystalline	1305W total
Battery	High-Temp Lead Acid, 3S2P	900Ah / 21,600Wh
System Voltage	24 V DC	—
MPPT Controller	EPEVER 60A	98% eff.
Max PV Input	150V	—

Parameter	Value	Comment
Mast	Manual, 9m	
Camera Box	412×412×416 mm	—
System Weight	1300 kg	—
Dimensions of the Trailer	2320×1495×2350 mm	—
Trailer Mobility	Single Axle, Mech. Brake	50mm ball hitch
Protection / Wind	IP65	100 km/h

Product Comparison

Side-by-side comparison of all WakeCap Power Solutions products.

Parameter	WP-30	WP-60	WP-400T	WP-900T
Solar Power	80W	100W	450W	1305W
Panel Config	2 x 40W	2 x 50W	3 x 150W	3 x 435W
Panel Efficiency	≥23%	>22%	>20%	>21%
Battery Chemistry	LiFePO ₄	LiFePO ₄	Lead Acid	Lead Acid
Battery Capacity	30Ah / 384Wh	60Ah / 768Wh	400Ah / 4.8kWh	900Ah / 21.6kWh
Cycle Life	2000–5000	2000–5000	500–800	300–500
Calendar Life	8–10 years	8–10 years	5–7 years	3–5 years
System Voltage	12V DC	12V DC	12V DC	24V DC
Recommended Load	~8W	~15W	~100W	~350W
MPPT Efficiency	--	--	95%	98%
IP Rating	IP66	IP66	IP65	IP65
Operating Temp	-20 to +50°C	-30 to +85°C	-20 to +85°C	-20 to +85°C
Form Factor	Pole Mount	Pole Mount	Trailer	Trailer
Mast	—	—	6.5m Pneumatic	9m Manual
System Weight	~5.5 kg	23 kg	525 kg	1300 kg
Vehicle Access	--	--	Pickup	Pickup
Ground Area	N/A (pole)	N/A (pole)	~4 m ²	~6 m ²

WakeCap Technologies

For any question/details contact: Zishan Shahzad — zishan.shahzad@wakecap.com