




POWER SOLUTIONS

Product Catalogue

Off-Grid Solar Power Systems for Remote Deployment

WP-384 • WP-768 • WP-4800T • WP-21600T

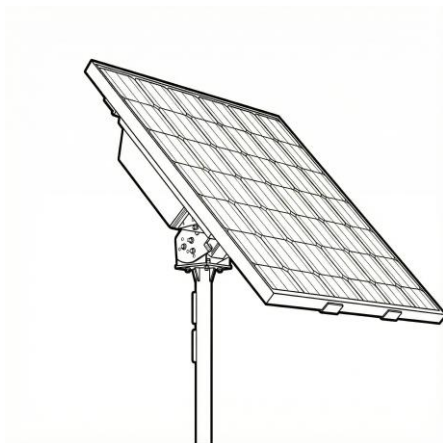

WakeCap Power 384

WP-384

80W Solar | 384Wh LiFePO₄ | Mainly used for Gateways

Ultra-compact, pole-mounted solar power system for lightweight remote equipment. Integrated MPPT controller with BMS, LiFePO₄ battery, and IP66 enclosure for harsh desert and coastal environments.

KEY FEATURES

- ✓ Integrated MPPT controller (>95% efficiency) with BMS
- ✓ LiFePO₄ battery, 2000–5000 cycle life
- ✓ IP66 dust-tight, water-jet resistant
- ✓ LED indicators: charge, output, battery
- ✓ Pole/wall mount (60–150mm pole)

80W

Solar Power

384Wh

Battery

8W

Load

TECHNICAL SPECIFICATIONS

Parameter	Value	Note
Model	TD-G8030	—
Solar Panels	2 x 40W Grade-A Mono	80W total
Panel Efficiency	≥23%	—
Battery	LiFePO ₄ , 2P4S	30Ah / 384Wh
Output Voltage	12 ±0.5 V DC	—
Max Output Current	3A	—

Parameter	Value	Note
Runtime (no solar)	8–10 days @150mA	—
Recharge Time	8–10 hours	—
Operating Temp	-20 to +50°C	—
Protection	IP66	—
Dimensions (panels)	390×530×17 mm (×2)	—
Installation	Pole / Wall Mount	—



WakeCap Power 768

WP-768

100W Solar | 768Wh LiFePO₄ | Off-Grid Power System

Modular pole-mounted solar power system for medium-demand remote equipment. Standalone 10A MPPT controller, 60Ah LiFePO₄ battery, and aviation-style waterproof connectors for reliable field connections.

KEY FEATURES

- ✓ 10A MPPT controller, 96.5% efficiency
- ✓ 60Ah LiFePO₄ with integrated BMS
- ✓ N-Type A+ Grade mono panels, >22%
- ✓ Aviation waterproof connectors
- ✓ Adjustable panel tilt 0–30°
- ✓ Controller self-consumption: 0.06W

100W
Solar Power


768Wh
Battery

15W
Max Load

TECHNICAL SPECIFICATIONS

Parameter	Value	Note
Model	TS-100W60AH	—
Solar Panels	2 x 50W N-Type A+ Mono	100W total
Panel Efficiency	>22%	—
Battery	LiFePO ₄	60Ah / 768Wh
Voltage Range	10.5–12.6 V DC	—
Max Current (In/Out)	10A / 10A	—

Parameter	Value	Note
MPPT Efficiency	96.5%	—
Operating Temp	-30 to +85°C	—
Protection	IP66	—
System Weight	23 kg	—
Package Size	940×780×240 mm	—
Output Connector	5.5×2.1mm DC	—

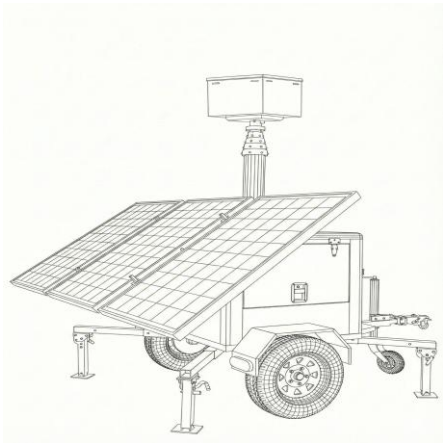

WakeCap Power 4800T

WP-4800T

450W Solar | 4800Wh GEL | Trailer-Mounted Power Station

Mobile trailer-mounted solar power station for temporary and semi-permanent deployments. 6.5m pneumatic mast, 400Ah GEL battery bank, and integrated equipment cabinet with thermal management. Available in two output variants: WP-4800T-DC (12V DC) and WP-4800T-AC (220V AC).

KEY FEATURES


- ✓ 6.5m pneumatic mast (5 sections, Al alloy)
- ✓ 2×200Ah LEOCH GEL batteries (400Ah)
- ✓ 30A MPPT charge controller
- ✓ Equipment cabinet with fan cooling
- ✓ DC variant (WP-4800T-DC): 12V DC output
- ✓ AC variant (WP-4800T-AC): 220V AC output

450W	4.8kWh	100W
Solar Power	Battery	Max Load

TECHNICAL SPECIFICATIONS

Parameter	Value	Note
Model	WP-4800T	—
Variants	WP-4800T-DC / WP-4800T-AC	—
DC Output	12 V DC	WP-4800T-DC
AC Output	220 V AC	WP-4800T-AC
Solar Panels	3 x 150W Monocrystalline	450W total
Battery	GEL Deep Cycle (LEOCH)	400Ah / 4800Wh

Parameter	Value	Note
MPPT Rating	30A	—
Runtime (180W load)	~25 hours	—
Mast	Pneumatic, 6.5m	5 sections
System Weight	525 kg	—
Packed Size	2000×1400×2300 mm	—
Protection	IP65	2yr warranty

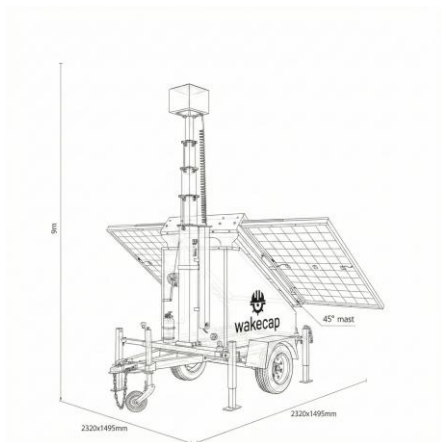

WakeCap Power 21600T

WP-21600T

1305W Solar | 21.6kWh Lead Acid | Heavy-Duty Trailer Power Station

Highest-capacity trailer power station in the WakeCap portfolio. 9m manual mast, 900Ah high-temperature lead-acid battery bank (24V), and EPEVER 60A MPPT controller for heavy-duty applications. Available in two output variants: WP-21600T-DC (24V DC) and WP-21600T-AC (220V AC).

KEY FEATURES

- ✓ 9m manual mast with CAT6 + power routing
- ✓ 6×150Ah lead-acid batteries (3S2P, 24V)
- ✓ EPEVER 60A MPPT, 98% efficiency
- ✓ 3×435W mono panels (1305W total)
- ✓ DC variant (WP-21600T-DC): 24V DC output
- ✓ AC variant (WP-21600T-AC): 220V AC output

1305W

Solar Power

21.6kWh

Battery

350W

Max Load

TECHNICAL SPECIFICATIONS

Parameter	Value	Note
Model	WP-21600T	—
Variants	WP-21600T-DC / WP-21600T-AC	—
DC Output	24 V DC	WP-21600T-DC
AC Output	220 V AC	WP-21600T-AC
Solar Panels	3 x 435W Monocrystalline	1305W total
Battery	High-Temp Lead Acid, 3S2P	900Ah / 21,600Wh

Parameter	Value	Note
MPPT Controller	EPEVER 60A	98% eff.
Max PV Input	150V	—
Mast	Manual, 9m	CAT6 + power
Camera Box	412×412×416 mm	—
System Weight	1300 kg	—
Protection / Wind	IP65	100 km/h

Product Comparison

Side-by-side comparison of all WakeCap Power Solutions products.

Parameter	WP-384	WP-768	WP-4800T	WP-21600T
Solar Power	80W	100W	450W	1305W
Panel Config	2 x 40W	2 x 50W	3 x 150W	3 x 435W
Panel Efficiency	≥23%	>22%	>20%	>21%
Battery Chemistry	LiFePO ₄	LiFePO ₄	GEL Lead Acid	Lead Acid
Battery Capacity	30Ah / 384Wh	60Ah / 768Wh	400Ah / 4.8kWh	900Ah / 21.6kWh
Cycle Life	2000–5000	2000–5000	500–800	300–500
Calendar Life	8–10 years	8–10 years	5–7 years	3–5 years
System Voltage	12V DC	12V DC	12V DC	24V DC
Max Target Load	8W	15W	100W	350W
Max Load (24h)	~8W	~15W	~100W	~350W
MPPT Efficiency	>95%	96.5%	95%	98%
IP Rating	IP66	IP66	IP65	IP65
Operating Temp	-20 to +50°C	-30 to +85°C	-20 to +80°C	-20 to +85°C
Form Factor	Pole Mount	Pole Mount	Trailer	Trailer
Mast	—	—	6.5m Pneumatic	9m Manual
System Weight	~5.5 kg	23 kg	525 kg	1300 kg
Vehicle Access	Light vehicle	Light vehicle	Pickup + trailer	Heavy vehicle
Ground Area	N/A (pole)	N/A (pole)	~4 m ²	~6 m ²
Output Variants	—	—	DC (12V) / AC (220V)	DC (24V) / AC (220V)

WakeCap Technologies

For further queries, contact: Zishan Shahzad — zishan.shahzad@wakecap.com