

---

---

**Road vehicles — Diagnostics on  
Controller Area Networks (CAN) —**

**Part 2:  
Network layer services**

*Véhicules routiers — Diagnostic sur gestionnaire de réseau de  
communication (CAN) —*

*Partie 2: Services de la couche réseau*



**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO 2004

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

Foreword .....	iv
Introduction .....	v
1 Scope .....	1
2 Normative references .....	1
3 Terms, definitions and abbreviated terms .....	1
4 Network layer overview .....	3
4.1 General .....	3
4.2 Services provided by network layer to higher layers .....	3
4.3 Internal operation of network layer .....	4
5 Network layer services .....	5
5.1 General .....	5
5.2 Specification of network layer service primitives .....	6
5.3 Service data unit specification .....	8
6 Network layer protocol .....	12
6.1 Protocol functions .....	12
6.2 Single frame transmission .....	12
6.3 Multiple frame transmission .....	12
6.4 Network layer protocol data units .....	15
6.5 Protocol control information specification .....	16
6.6 Maximum number of FC.Wait frame transmissions (N_WFTmax) .....	23
6.7 Network layer timing .....	23
6.8 Interleaving of messages .....	27
7 Data link layer usage .....	27
7.1 Data link layer interface services .....	27
7.2 Data link layer service parameters .....	28
7.3 Mapping of the N_PDU fields .....	28
7.4 CAN frame Data Length Code (DLC) .....	30
Annex A (informative) Use of normal fixed and mixed addressing with data link layer according to SAE J1939 .....	32
Bibliography .....	35

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 15765-2 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 3, *Electrical and electronic equipment*.

ISO 15765 consists of the following parts, under the general title *Road vehicles — Diagnostics on Controller Area Networks (CAN)*:

- *Part 1: General information*
- *Part 2: Network layer services*
- *Part 3: Implementation of unified diagnostic services (UDS on CAN)*
- *Part 4: Requirements for emissions-related systems*

## Introduction

This part of ISO 15765 has been established in order to define common requirements for vehicle diagnostic systems implemented on a Controller Area Network (CAN) communication link, as specified in ISO 11898. Although primarily intended for diagnostic systems, it also meets requirements from other CAN-based systems needing a network layer protocol.

To achieve this, it is based on the Open Systems Interconnection (OSI) Basic Reference Model specified in ISO/IEC 7498 and ISO/IEC 10731, which structures communication systems into seven layers. When mapped on this model, the services specified by ISO 15765 are divided into

- unified diagnostic services (layer 7), specified in ISO 15765-3,
- network layer services (layer 3), specified in this part of ISO 15765,
- CAN services (layers 1 and 2), specified in ISO 11898,

in accordance with Table 1.

The application layer services covered by ISO 15765-3 have been defined in compliance with diagnostic services established in ISO 14229-1 and ISO 15031-5, but are not limited to use only with them. ISO 15765-3 is also compatible with most diagnostic services defined in national standards or vehicle manufacturer's specifications.

The network layer services covered by this part of ISO 15765 have been defined to be independent of the physical layer implemented, and a physical layer is only specified for legislated OBD.

For other application areas, ISO 15765 can be used with any CAN physical layer.

**Table 1 — Enhanced and legislated OBD diagnostic specifications applicable to the OSI layers**

Open Systems Interconnection (OSI) layers	Vehicle manufacturer enhanced diagnostics	Legislated on-board diagnostics (OBD)
Diagnostic application	User defined	ISO 15031-5
Application layer	ISO 15765-3	ISO 15031-5
Presentation layer	N/A	N/A
Session layer	ISO 15765-3	N/A
Transport layer	N/A	N/A
Network layer	ISO 15765-2	ISO 15765-4
Data link layer	ISO 11898-1	ISO 15765-4
Physical layer	User defined	ISO 15765-4



# Road vehicles — Diagnostics on Controller Area Networks (CAN) —

## Part 2: Network layer services

这部分ISO 15765协议描述了在ISO 11898定义的控制其局域网中裁剪的网络协议，用于满足基于CAN的车载网络系统。它是按照ISO 14229-1和ISO 15031-5建立的诊断服务制定的，但该部分协议不仅适用于上述的诊断服务项，还适用于车载内部其它的网络通信。该协议描述的是未经最后确认的通信。

### 1 Scope

This part of ISO 15765 specifies a network protocol tailored to meet the requirements of CAN-based vehicle network systems on controller area networks as specified in ISO 11898. It has been defined in accordance with the diagnostic services established in ISO 14229-1 and ISO 15031-5, but is not limited to use with them, and is also compatible with most other communication needs for in-vehicle networks. The protocol specifies an unconfirmed communication.节点网络协议

### 2 Normative references 标准参考

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 11898-1, Road vehicles — Controller area network (CAN) — Part 1: Data link layer and physical signalling

ISO/IEC 7498 (all parts), Information technology — Open Systems Interconnection — Basic Reference Model

### 3 Terms, definitions and abbreviated terms

目的、定义和简写

For the purposes of this document, the terms and definitions given in ISO 7498, and the following abbreviated terms, apply.

BS	block size 块大小
CF	consecutive frame 持续帧
confirm	confirmation service primitive 确认服务原语
ECU	electronic control unit 电控单元
FC	flow control 流控帧
FF	first frame 首帧
FF_DL	first frame data length 首帧数据长度
FS	flow status 流控状态
indication	indication service primitive 指示服务原语

Mtype	message type 消息类型 [诊断、远程诊断]
N_AE	network address extension
N_AI	<u>address information</u>
N_Ar	network layer <u>timing parameter Ar</u>
N_As	network layer <u>timing parameter As</u>
N_Br	network layer <u>timing parameter Br</u>
N_Bs	network layer <u>timing parameter Bs</u>
N_ChangeParameter	network layer service name
N_Cr	network layer timing parameter Cr
N-Cs	network layer timing parameter Cs
N_Data	network data
N_PCI	network protocol control information
N_PCIttype	network protocol control information type
N_PDU	network protocol data unit
<u>N_SA</u>	<u>network source address</u>
N_SDU	network service data unit
N_TA	network target address
N_TAtype	network target address type 物理、功能
N_USData	network layer unacknowledged segmented data transfer service name
<u>NWL</u>	<u>network layer</u>
request	request service primitive
r	receiver
s	sender
SF	single frame
SF_DL	single frame data length
SN	sequence number
STmin	separation time min.





## 4 Network layer overview

注意不同层之间的原语含义不一定相同。

### 4.1 General

本节将描述网络层所包含的全部功能

This clause describes the overall functionality of the network layer. This part of ISO 15765 specifies an unconfirmed network layer communication protocol for the exchange of data between network nodes, e.g. from ECU to ECU, or between external test equipment and an ECU. If the data to be transferred do not fit into a single CAN frame, a segmentation method is provided.

In order to describe the function of the network layer, services provided to higher layers and the internal operation of the network layer have to be considered.

### 4.2 Services provided by network layer to higher layers

The service interface defines a set of services that are needed to access the functions offered by the network layer, i.e. transmission/reception of data and setting of protocol parameters.

Two types of services are defined.

该服务项接口定义了一系列由网络层提供使用服务项，例如，数据发送、数据接收及协议参数设置。  
已定义了两种类型的服务：

#### a) Communication services

These services, of which the following are defined, enable the transfer of up to 4 095 bytes of data.

##### 1) N\_USData.request

**N\_USData: network layer unacknowledged segmented data transfer service name**

This service is used to request the transfer of data. If necessary, the network layer segments the data. 该服务项用于请求发送数据。如果有必要的话，网络层拆分这些数据。

##### 2) N\_USData\_FF.indication

This service is used to signal the beginning of a segmented message reception to the upper layer.

该服务项用于通知上层被拆分的信息的首帧的接收

##### 3) N\_USData.indication

This service is used to provide received data to the higher layers.

该服务项用于提供接收的数据至上层。

##### 4) N\_USData.confirm

**confirm**用来告知上层request是否成功发送出去

This service confirms to the higher layers that the requested service has been carried out (successfully or not).

该服务项用于确认应答给上层，表示请求服务项已经被执行（成功执行或不成功执行）。

#### b) Protocol parameter setting services

These services, of which the following are defined, enable the dynamic setting of protocol parameters.

以下定义的服务项，使之能够对协议参数动态设置。

##### 1) N\_ChangeParameter.request

**N\_ChangeParameter: network layer service name**

This service is used to request the dynamic setting of specific internal parameters.

该项服务用于对特定内部参数的动态设置的请求

##### 2) N\_ChangeParameter.confirm

This service confirms to the upper layer that the request to change a specific protocol has been carried out (successfully or not).

该服务项用于确认应答给上层，表示修改协议特定项的请求已经被执行（成功执行或不成功执行）。


网络层的内部操作通信提供了分段、重组、数据传输流控制方法。网络层主要的任务是传递一帧或大于一帧的数据信息。超过一帧的信息被分成多个部分，每一个部分都以一个CAN帧的形式被发送。

### 4.3 Internal operation of network layer

The internal operation of the network layer provides methods for segmentation, transmission with flow control, and reassembly. The main purpose of the network layer is to transfer messages that might or might not fit in a single CAN frame. Messages that do not fit into a single CAN frame are segmented into multiple parts, where each can be transmitted in a CAN frame.

Figure 1 shows an example of an unsegmented message transmission.


图1显示的是未被拆分的信息的传送的例子。

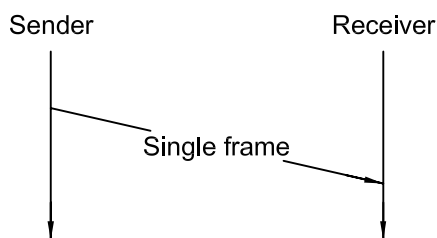

**Figure 1 — Example of unsegmented message**

图2显示的是被拆分的信息传送的例子

Figure 2 shows an example of a segmented message transmission.

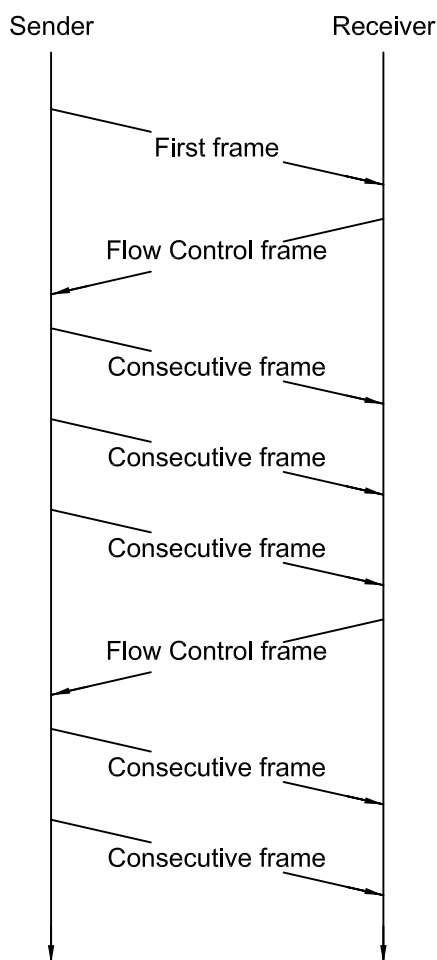

**Figure 2 — Example of segmented message**

流控制用来使发送端适应接收端网络层的接收能力。该流控制策略同样适用于诊断网关和通信子网。

Flow control is used to adjust the sender to the network layer capabilities of the receiver. This flow control scheme allows the use of diagnostic gateways and sub-networks.

ISO 15765 specifies three different addressing formats: normal, extended and mixed.

三种地址格式：标准，扩展，混合

## 5 Network layer services

### 5.1 General 概要

All network layer services have the same general structure. To define the services, three types of service primitives are specified:

所有的网络层服务项有统一的结构。为了定义这些服务项，三类主要的服务项说明如下：

- a service request primitive, used by higher communication layers or the application to pass control information and data required to be transmitted to the network layer;  
——请求服务，被更高的通信层或应用层使用或用于向网络层传递控制信息及要发送的数据；
- a service indication primitive, used by the network layer to pass status information and received data to upper communication layers or the application;  
——指示服务，被网络层使用，用于向更高通信层或应用层传递状态信息及接收到的数据；
- a service confirmation primitive used by the network layer to pass status information to higher communication layers or the application.  
——确认服务，被网络层使用，用于向更高通信层或应用层传递状态信息。

This service specification does not specify an application programming interface, but only a set of service primitives that are independent of any implementation.

这些服务说明没有指定具体的应用程序接口，而只是一些独立于具体实施的主要服务项。

All network layer services have the same general format. Service primitives are written in the form:

所有的网络层服务项有统一的结构形式，服务项写成如下的形式：

```
service_name.type (
    parameter A,
    parameter B,
    parameter C,
    ...
)
```

where “service name” is the name of the service, e.g. N\_USData, “type” indicates the type of the service primitive, and “parameter A, parameter B, parameter C, ...” are the N SDU as a list of values passed by the service primitive.

这里，“service\_name”是指服务项名称，例如，N\_SDU，“type”指示了服务项的类型，“parameter A, parameter B, parameter C, ...”则是N SDU服务项传递的值。

The service primitives define how a service user (e.g. diagnostic application) cooperates with a service provider (e.g. network layer). The following service primitives are specified in this International Standard: request, indication and confirm.

服务项定义了如何使服务的使用者(例如，诊断应用层)如何与服务的提供者(例如，网络层)协同运行。以下服务项已在国际标准中说明，请求，指示和确认。

- Using the service primitive request (service\_name.request) a service user requests a service from the service provider.  
——使用请求服务项 (service\_name.request)，服务使用者向服务提供者请求一项服务。
- Using the service primitive indication (service\_name.indication), the service provider informs a service user about an internal event of the network layer or the service request of a peer protocol layer entity, service user.  
——使用指示服务项(service\_name.indication)，服务提供者通知服务使用者网络层的一个内部事件或者一个对等协议层实体服务用户的服务请求。
- With the service primitive confirm (service\_name.confirm) the service provider informs the service user about the result of a preceding service request of the service user.  
——通过确认服务项 (service\_name.confirm)，服务提供者通知服务的使用者，之前服务使用者请求服务的结果。

## 5.2 Specification of network layer service primitives

该请求服务项是请求传递<MessageData>数据及<Length>字节数，从发送者到对等实体接收者，通过在N\_SA, N\_TA, N\_TAtype及N\_AE中的地址信息确认。

### 5.2.1 N\_USData.request

(参看5.3对参数的定义)。

The service primitive requests transmission of <MessageData> with <Length> bytes from the sender to the receiver peer entities identified by the address information in N\_SA, N\_TA, N\_TAtype, and N\_AE<sup>1)</sup> (see 5.3 for parameter definition).

源地址 目标地址 目标地址类型 地址扩展

Each time the N\_USData.request service is called, the network layer shall signal the completion (or failure) of the message transmission to the service user by means of the issuing of an N\_USData.confirm service call:

N\_USData.request ( N\_USData.request服务项每次被启动，网络层应当通过一条 N\_USData.confirm服务通知服务使用者信息传递的完成情况。  
(成功或失败)  
Mtype  
N\_SA  
N\_TA  
N\_TAtype  
N\_AE<sup>1)</sup>  
<MessageData>  
<Length>  
)

### 5.2.2 N\_USData.confirm

The N\_USData.confirm service is issued by the network layer. The service primitive confirms the completion of an N\_USData.request service identified by the address information in N\_SA, N\_TA, N\_TAtype, and N\_AE<sup>1)</sup>. The parameter <N\_Result> provides the status of the service request (see 5.3 for parameter definition).

N\_USData.confirm服务项由网络层发送，该服务项用于确定 N\_USData.request服务的完成情况，通过在N\_SA, N\_TA, N\_TAtype及N\_AE中的地址信息确认。参数<N\_Result>提供请求服务项的状态。  
(参看5.3对参数的定义)

N\_USData.confirm ( Mtype  
N\_SA  
N\_TA  
N\_TAtype  
N\_AE<sup>1)</sup>  
<N\_Result>  
)

### 5.2.3 N\_USData\_FF.indication

FF.indication 服务由网络层发出，

The N\_USData\_FF.indication service is issued by the network layer. The service primitive indicates to the adjacent upper layer the arrival of a first frame (FF) of a segmented message received from a peer protocol entity, identified by the address information in N\_SA, N\_TA, N\_TAtype, and N\_AE<sup>1)</sup> (see 5.3 for parameter definition). This indication shall take place upon reception of the first frame (FF) of a segmented message.

N\_USData\_FF.indication ( N\_USData\_FF.indication服务项由网络层发送。该服务项用于通知相邻上层接收到对等实体首帧数据已经到了。通过在 N\_SA, N\_TA, N\_TAtype及N\_AE中的地址信息确认。(参看5.3对参数的定义) 这个指示项发生在接收到拆分数数据首帧的时刻。  
Mtype  
N\_SA  
N\_TA  
N\_TAtype  
N\_AE<sup>1)</sup>  
<Length>  
)

The N\_USData\_FF.indication service shall always be followed by an N\_USData.indication service call from the network layer, indicating the completion (or failure) of the message reception.

N\_USData\_FF.indication指示服务项，应当总是紧跟着发送来自网络层的一个

1) Optional. N\_USData.indication服务项，指示信息接收的完成情况。(成功或失败)

N\_USData\_FF.indication指示服务项应当只有被网络层发送，如果指示信息段的首帧是否被正确接收。

An N\_USData\_FF.indication service call shall only be issued by the network layer if a correct first frame (FF) message segment has been received.

如果网络层监测到首帧中任何类型的错误，该信息应当被网络层忽略，并且N\_USData\_FF.indication指示服务项不应当被发送至相邻的上层。  
If the network layer detects any type of error in a first frame (FF), then the message shall be ignored by the network layer and no N\_USData\_FF.indication shall be issued to the adjacent upper layer.

If the network layer receives a first frame (FF) with a data length value (FF\_DL) that is greater than the available receiver buffer size, then this shall be considered as an error condition and no N\_USData\_FF.indication shall be issued to the adjacent upper layer.

如果网络层接收到首帧中数据长度项的值(FF\_DL)大于接收者缓冲区的数据，这应当被认为是一个错误的条件并且N\_USData\_FF.indication指示服务项不应当被发送至相邻的上层。

#### 5.2.4 N\_USData.indication

The N\_USData.indication service is issued by the network layer. The service primitive indicates <N\_Result> events and delivers <MessageData> with <Length> bytes received from a peer protocol entity identified by the address information in N\_SA, N\_TA, N\_TAtype, and N\_AE<sup>2)</sup> to the adjacent upper layer (see 5.3 for parameter definition). N\_USData.indication服务项由网络层发送。该服务项指示<N\_Result>事件并传递<Length>字节数的<MessageData>至相邻的上层。这些信息通过同等实体间通过存放于N\_SA, N\_TA, N\_TAtype及N\_AE中标识的地址信息接收过来的。

The parameters <MessageData> and <Length> are only valid if <N\_Result> equals N\_OK

N\_USData.indication ( 当<N\_Result>值为N\_OK时，<MessageData>及<Length>参数信息才有效。  
Mtype  
N\_SA  
N\_TA  
N\_TAtype  
N\_AE<sup>2)</sup>  
<MessageData>  
<Length>  
<N\_Result>  
)

The N\_USData.indication service call is issued after the reception of a single frame (SF) message or as an indication of the completion (or failure) of a segmented message reception.

N\_USData.indication服务项是在接收到单帧(SF)信息或是指示拆分信息接收的完成时发送。

If the network layer detects any type of error in a single frame (SF), then the message shall be ignored by the network layer and no N\_USData.indication shall be issued to the adjacent upper layer.

如果网络层检测到单帧中任何类型的错误，该条单帧信息应当被忽略并且N\_USData\_FF.indication指示服务项不应当被发送至相邻的上层。

#### 5.2.5 N\_ChangeParameters.request

The service primitive is used to request the change of an internal parameter's value on the local protocol entity.

该服务项用于请求本地实体内部参数的修改。<Parameter\_Value>参数值分配给<Parameter>参数(参看5.3对参数的定义)。A parameter change is always possible, except after reception of the first frame (N\_USData\_FF.indication) and until the end of the reception of the corresponding message (N\_USData.indication).

对参数总是可以修改的。特殊情况是在应用层接收到首帧的指示服务项(N\_USData\_FF.indication)到接收(N\_USData.indication)服务项之间的时刻。

N\_ChangeParameters.request (Mtype  
N\_SA  
N\_TA  
N\_TAtype  
N\_AE<sup>2)</sup>  
<Parameter>  
<Parameter\_Value>  
)

This is an optional service that can be replaced by implementation of fixed parameter values.

这是一个可选服务项，可被固定的参数值实施代替。

2) Optional.

### 5.2.6 N\_ChangeParameter.confirm

The service primitive confirms the completion of an N\_ChangeParameter.Confirmation service applying to a message identified by the address information in N\_SA, N\_TA, N\_TAtype, and N\_AE<sup>3)</sup> (see 5.3 for parameter definition). 该服务项用于确认N\_ChangeParameter.Confirmation运用信息的完成情况，这信息通过在N\_SA, N\_TA, N\_TAtype及N\_AE中的地址信息标识。

```
N_ChangeParameter.confirm (
    Mtype
    N_SA
    N_TA
    N_TAtype
    N_AE3)
    <Parameter>
    <Result_ChangeParameter>
)
```

## 5.3 Service data unit specification 类型：枚举类型

范围：诊断，远程诊断

### 5.3.1 Mtype, Message type

描述：参数Mtype用于确定服务项中信息参数的类型及地址范围。

Type: enumeration

Range: diagnostics, remote diagnostics

Description: The parameter Mtype shall be used to identify the type and range of address information parameters included in a service call. This part of ISO 15765 specifies a range of two values for this parameter. The intention is that users of the document can extend the range of values by specifying other types and combinations of address information parameters to be used with the network layer protocol specified in this document. For each such new range of address information, a new value for the Mtype parameter shall be specified to identify the new address information.

- If Mtype = diagnostics, then the address information N\_AI shall consist of the parameters N\_SA, N\_TA, and N\_TAtype.

——如果Mtype = 诊断，N\_AI地址信息应当包含参数N\_SA, N\_TA, 和N\_TAtype。

- If Mtype = remote diagnostics, then the address information N\_AI shall consist of the parameters N\_SA, N\_TA, N\_TAtype, and N\_AE.

——如果Mtype = 远程诊断，N\_AI地址信息应当包含参数N\_SA, N\_TA, 和N\_TAtype，和N\_AE。

### 5.3.2 N\_AI, Address Information

#### 5.3.2.1 N\_AI description 该参数指的是地址信息。总的来说，N\_AI参数用于确定信息发送者和接收者的源地址（N\_SA），目标地址（N\_TA），也包含确定（N\_TAtype）和可选择地址扩展（N\_AE）的通信模式。

These parameters refer to addressing information. As a whole, the N\_AI parameters are used to identify the source address (N\_SA), target address (N\_TA) of message senders and recipients as well as the communication model for the message (N\_TAtype) and the optional address extension (N\_AE).

#### 5.3.2.2 N\_SA, Network Source Address

Type: 1 byte unsigned integer value

类型：1字节的无符号整数

Range: 00-FF hex

范围：00-FF 16进制

描述：N\_SA参数代表发送者网络层实体

Description: The N\_SA parameter shall be used to encode the sending network layer protocol entity.

3) Optional.





## 5.3.5 &lt;Parameter&gt;

类型：枚举类型

范围：STmin, BS

描述：该参数确定网络层的参数

Type: enumeration

STmin: separation time min.

Range: STmin, BS

BS: block size

Description: This parameter identifies a parameter of the network layer.

## 5.3.6 &lt;Parameter\_Value&gt;

类型：1字节无符号整数

范围：0-255

描述：该参数分配给协议参数&lt;Parameter&gt;作为指示服务。

Type: 1 byte unsigned integer value

Range: 0-255

Description: This parameter is assigned to a protocol parameter &lt;Parameter&gt; as indicated in the service section of this document.

## 5.3.7 &lt;N\_Result&gt;

类型：枚举类型

范围：N\_OK, N\_TIMEOUT\_A, N\_TIMEOUT\_Bs, N\_TIMEOUT\_Cr, N\_WRONG\_SN, N\_INVALID\_FS, N\_UNEXP\_PDU, N\_WFT\_OVRN, N\_BUFFER\_OVFLW, N\_ERROR

Type: enumeration

Range: N\_OK, N\_TIMEOUT\_A, N\_TIMEOUT\_Bs, N\_TIMEOUT\_Cr, N\_WRONG\_SN, N\_INVALID\_FS, N\_UNEXP\_PDU, N\_WFT\_OVRN, N\_BUFFER\_OVFLW, N\_ERROR

Description: This parameter contains the status relating to the outcome of a service execution. If two or more errors are discovered at the same time, then the network layer entity shall use the parameter value first found in this list in the error indication to the higher layers.

描述：该参数包含与服务项执行的结果状态。如果同时产生了两个或以上的错误，网络层应该使用下列错误指示中首先找到的参数值，发送给高层。

This value means that the service execution has completed successfully; it can be issued to a service user on both the sender and receiver side.

## — N\_TIMEOUT\_A

接收方CAN报文确认超时

This value is issued to the protocol user when the timer N\_Ar/N\_As has passed its time-out value N\_As<sub>max</sub>/N\_Ar<sub>max</sub>; it can be issued to service user on both the sender and receiver side. 发送方CAN报文确认超时

## — N\_TIMEOUT\_Bs

FC超时

This value is issued to the service user when the timer N\_Bs has passed its time-out value N\_Bs<sub>max</sub>; it can be issued to the service user on the sender side only.

## — N\_TIMEOUT\_Cr

CF超时

This value is issued to the service user when the timer N\_Cr has passed its time-out value N\_Cr<sub>max</sub>; it can be issued to the service user on the receiver side only.

## — N\_WRONG\_SN

This value is issued to the service user upon reception of an unexpected sequence number (PCI.SN) value; it can be issued to the service user on the receiver side only.



— N\_INVALID\_FS

This value is issued to the service user when an invalid or unknown FlowStatus value has been received in a flow control (FC) N\_PDU; it can be issued to the service user on the sender side only.

— N\_UNEXP\_PDU

This value is issued to the service user upon reception of an unexpected protocol data unit; it can be issued to the service user on the receiver side only.

— N\_WFT\_OVRN

This value is issued to the service user upon reception of flow control WAIT frame that exceeds the maximum counter N\_WFTmax.

— N\_BUFFER\_OVFLW

This value is issued to the service user upon reception of a flow control (FC) N\_PDU with FlowStatus = OVFLW. It indicates that the buffer on the receiver side of a segmented message transmission cannot store the number of bytes specified by the FirstFrame DataLength (FF\_DL) parameter in the FirstFrame and therefore the transmission of the segmented message was aborted. It can be issued to the service user on the sender side only.

— N\_ERROR

This is the general error value. It shall be issued to the service user when an error has been detected by the network layer and no other parameter value can be used to better describe the error. It can be issued to the service user on both the sender and receiver side.

### 5.3.8 <Result\_ChangeParameter>

Type: enumeration.

Range: N\_OK, N\_RX\_ON, N\_WRONG\_PARAMETER, N\_WRONG\_VALUE

Description: This parameter contains the status relating to the outcome of a service execution.

— N\_OK

This value means that the service execution has completed successfully; it can be issued to a service user on both the sender and receiver side.

— N\_RX\_ON

This value is issued to the service user to indicate that the service did not execute since a reception of the message identified by <AI> was taking place. It can be issued to the service user on the receiver side only.

— N\_WRONG\_PARAMETER

This value is issued to the service user to indicate that the service did not execute due to an undefined <Parameter>; it can be issued to the service user on both the receiver and sender side.

— N\_WRONG\_VALUE

This value is issued to the service user to indicate that the service did not execute due to an out of range <Parameter Value>; it can be issued to the service user on both the receiver and sender side.

## 6 Network layer protocol

### 6.1 Protocol functions

The network layer protocol performs the following functions:

- a) transmission/reception of messages up to 4 095 data bytes;
- b) reporting of transmission/reception completion (or failure).

### 6.2 Single frame transmission

Transmission of messages up to six (6) (in case of extended or mixed addressing) or seven (7) (in case of normal addressing) data bytes is performed via transmission of a unique N\_PDU (see 6.4), called SF (see Figure 3).

Reception of messages up to six (6) or seven (7) data bytes is performed via reception of a unique N\_PDU.

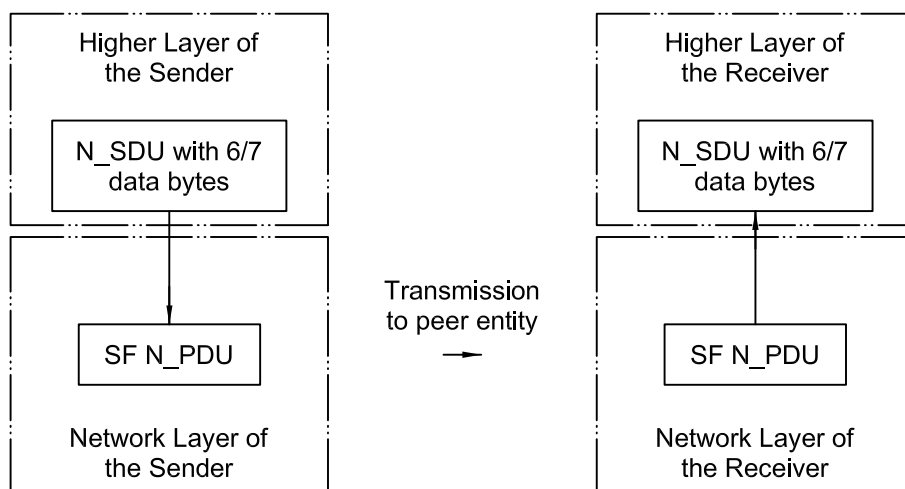


Figure 3 — Example of unsegmented message

### 6.3 Multiple frame transmission


Transmission of longer messages is performed via segmentation of the message and transmission of multiple N\_PDUs. Reception of longer messages is performed via reception of multiple N\_PDUs and reassembly of the received data bytes (concatenation). The multiple N\_PDUs are called FirstFrame (for the first N\_PDU of the message) and ConsecutiveFrame (for all the following N\_PDUs).

The receiver of a multiple N\_PDU message has the possibility of adapting the transmission throughput to its capability by means of the flow control mechanism using the FlowControl protocol data units (FC N\_PDU).

Messages longer than six (6) or seven (7) data bytes are segmented into

- a FirstFrame protocol data unit (FF N\_PDU), containing the first five (5) — in the case of extended or mixed addressing — or six (6) — in the case of normal addressing — data bytes, and
- one or more ConsecutiveFrame protocol data units (CF N\_PDU), containing each six (6) or seven (7) data bytes. The CF N\_PDU contains only the remaining data bytes, and may therefore be less than six (6) or seven (7) data bytes long.

Figure 4 shows segmentation at the sender side and reassembly at the receiver side.

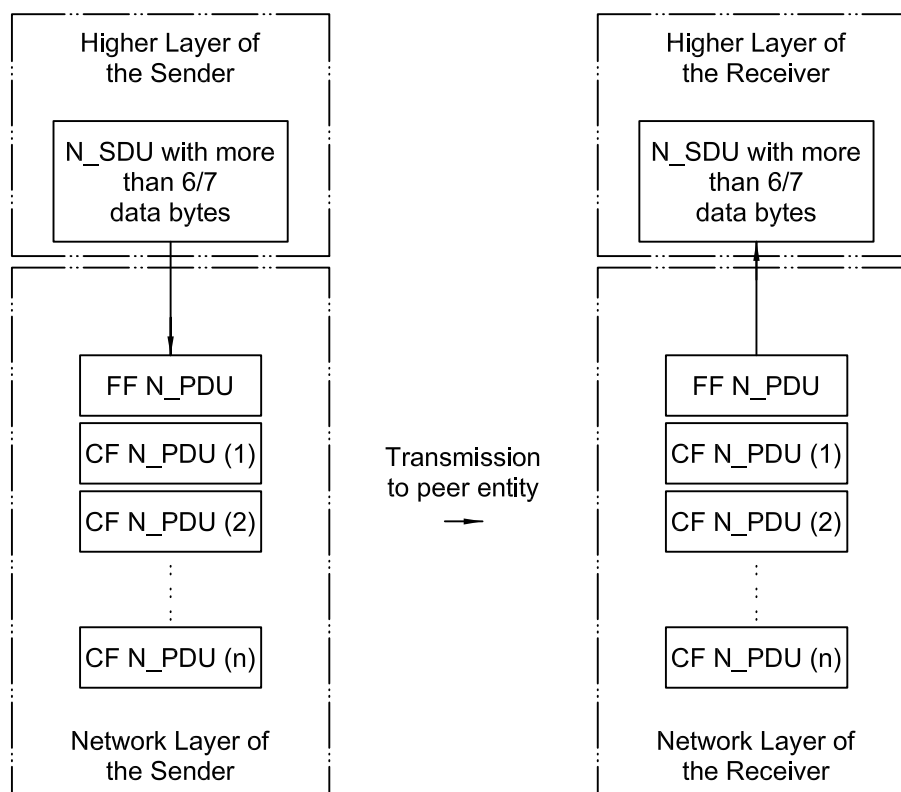

NOTE The FC N\_PDU issued by the receiver in response to the reception of the FF N\_PDU is not shown.


**Figure 4 — Segmentation and reassembly**

The message length is transmitted in the FF N\_PDU. All CF N\_PDU's are numbered by the sender to help the receiver re-assemble them in the same order.

The flow control mechanism (see Figure 5) allows the receiver to inform the sender about the receiver's capabilities. Since different nodes may have different capabilities, the flow control sent by the receiver informs the sender about its capabilities. The sender shall conform to the receiver's capabilities.

These capabilities are defined as follows.

- BlockSize (BS): the maximum number of N\_PDU's the receiver allows the sender to send, before waiting for an authorization to continue transmission of the following N\_PDU's. 接收方允许发送方发送的最大数量
- SeparationTimeMin (STmin): the minimum time the sender is to wait between the transmissions of two CF N\_PDU's. 发送方连续两个报文帧之间的最小间隔时间

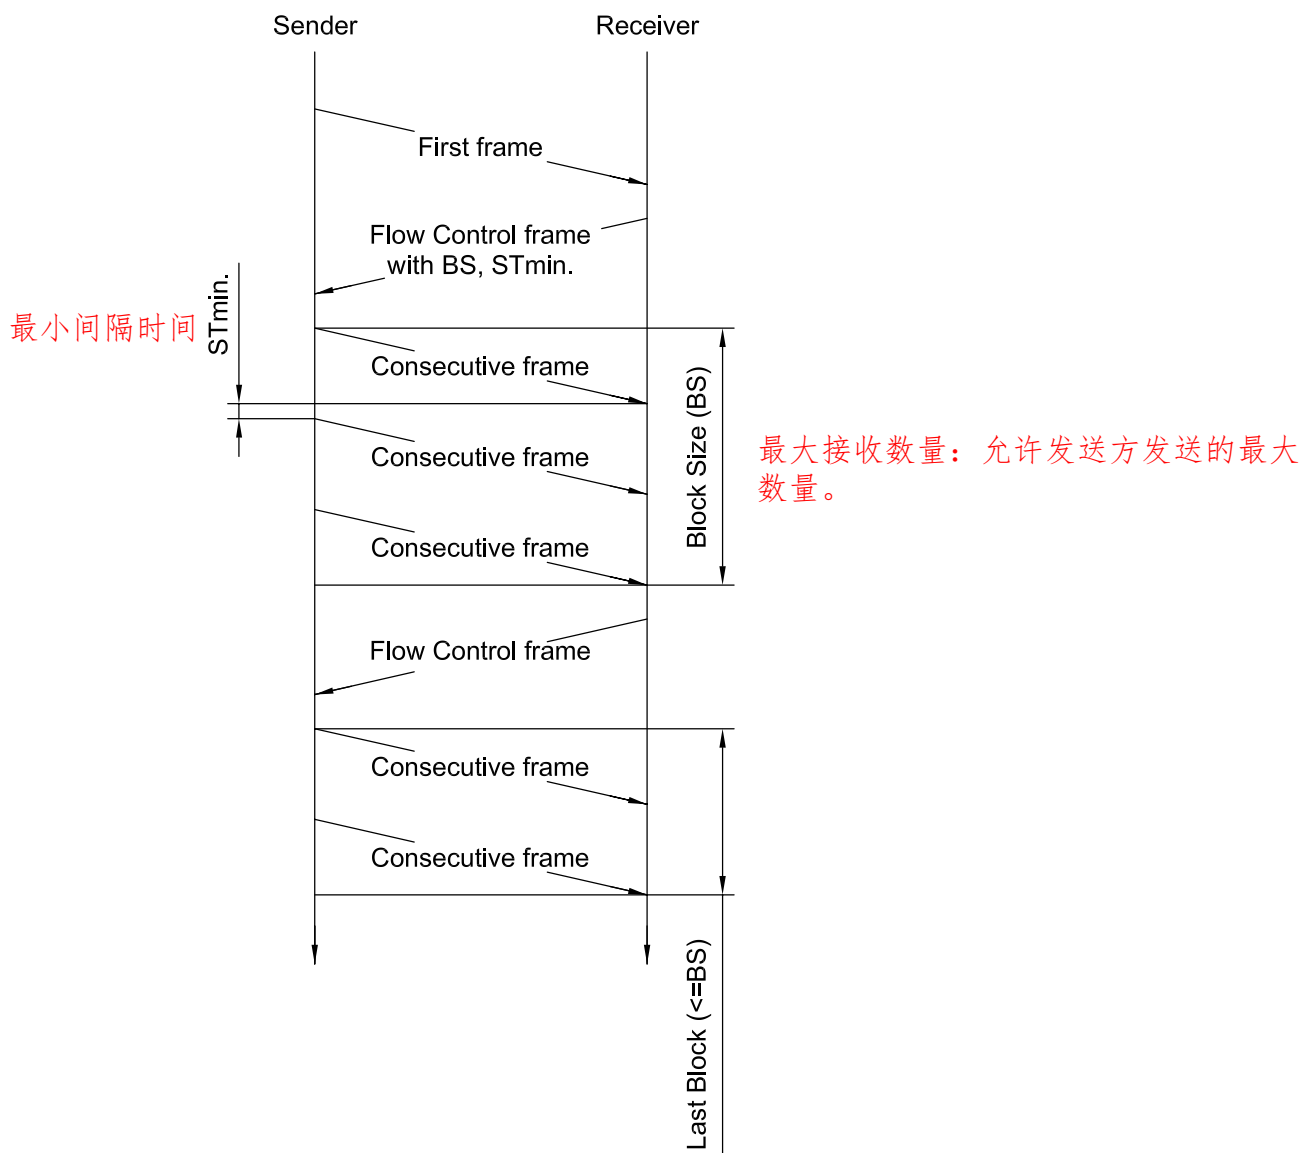

### Figure 5 — Flow Control (FC) mechanism

All blocks, except the last one, will consist of BS N\_PDUs. The last one will contain the remaining N\_PDUs (1 up to BS). 最后一个块将包含N\_PDUs的数量。

Each time the sender/receiver waits for an N\_PDU from the receiver/sender, a timeout mechanism allows detection of a transmission failure (see 6.7.2). 网络层 协议数据单元

By means of FC N\_PDUs, the receiver has the possibility of authorizing transmission of the following CF N\_PDUs, to delay transmission of that authorization or to deny the reception of a segmented message in case the number of bytes to be transferred exceeds the number of bytes that can be stored in the receiver buffer.

通过流控制，可以延迟传输，可以杜绝超过接收方缓冲区大小的传输

- FC.CTS: continue to send, the authorization to continue,
- FC.WAIT: the request to continue to wait,
- FC.OVFLW: buffer overflow, the indication that the number of bytes specified in the FirstFrame of the segmented message exceeds the number of bytes that can be stored in the buffer of the receiver entity.

There is a maximum limit to the number of FC.WAIT a receiver is allowed to send in a row: N\_WFTmax. This parameter is a system design constant and is not transmitted in the first FC N\_PDU.

## 6.4 Network layer protocol data units

### 6.4.1 Protocol data unit types 协议数据单元类型

The communication between the peer protocol entities of the network layer in different nodes is done by means of exchanging N\_PDUs. 交互N\_PDUs实现通讯

This part of ISO 15765 specifies four different types of network layer protocol data units — single-frame (SF N\_PDU), first-frame (FF N\_PDU), consecutive-frame (CF N\_PDU) and flow-control (FC N\_PDU) — which are used to establish a communication path between the peer network layer entities, to exchange communication parameters, to transmit user data and to release communication resources.

### 6.4.2 SF N\_PDU

The SF N\_PDU is identified by the single-frame protocol control information (SF N\_PCI). The SF N\_PDU shall be sent out by the sending network entity and can be received by one or multiple receiving network entities. It shall be sent out to transfer a service data unit that can be transferred via a single service request to the data link layer, and to transfer unsegmented messages.

### 6.4.3 FF N\_PDU

The FF N\_PDU is identified by the first-frame protocol control information (FF N\_PCI). The FF N\_PDU shall be sent out by the sending network entity and received by a unique receiving network entity for the duration of the segmented message transmission. It identifies the first N\_PDU of a segmented message transmitted by a network sending entity and received by a receiving network entity. The receiving network layer entity shall start assembling the segmented message on receipt of an FF N\_PDU.

### 6.4.4 CF N\_PDU

The CF N\_PDU is identified by the consecutive-frame protocol control information (CF N\_PCI). The CF N\_PDU transfers segments (N\_Data) of the service data unit message data (<MessageData>). All N\_PDUs transmitted by the sending entity after the FF N\_PDU shall be encoded as CF N\_PDUs. The receiving entity shall pass the assembled message to the service user of the network receiving entity after the last CF N\_PDU has been received. The CF N\_PDU shall be sent out by the sending network entity and received by a unique receiving network entity for the duration of the segmented message transmission.

### 6.4.5 FC N\_PDU

The FC N\_PDU is identified by the flow-control protocol control information (FC N\_PCI). The FC N\_PDU instructs a sending network entity to start, stop or resume transmission of CF N\_PDUs. It shall be sent by the receiving network layer entity to the sending network layer entity, when ready to receive more data, after correct reception of

- a) an FF N\_PDU, or
- b) the last CF N\_PDU of a block of consecutive frames, if further consecutive frames need to be sent.

The FC N\_PDU can also inform a sending network entity to pause transmission of CF N\_PDUs during a segmented message transmission or to abort the transmission of a segmented message if the length information (FF\_DL) in the FF N\_PDU transmitted by the sending entity exceeds the buffer size of the receiving entity.

## 6.4.6 Protocol data unit field description

### 6.4.6.1 N\_PDU format

The protocol data unit (N\_PDU) enables the transfer of data between the network layer in one node and the network layer in one or more other nodes (peer protocol entities). All N\_PDUs consist of three (3) fields, as given in Table 2.

Table 2 — N\_PDU format

Address information	Protocol control information	Data field
N_AI	N_PCI	N_Data

#### 6.4.6.2 Address information (N\_AI)

The N\_AI is used to identify the communicating peer entities of the network layer. The N\_AI information received in the N\_SDU — N\_SA, N\_TA, N\_TAtype, N\_AE<sup>4)</sup> — shall be copied and included in the N\_PDU. If the message data (<MessageData> and <Length>) received in the N\_SDU is so long that segmentation is needed for the network layer to transmit the complete message, the N\_AI shall be copied and included (repeated) in every N\_PDU that is transmitted.

This field contains address information that identifies the type of message exchanged, and the recipient(s) and sender between whom data exchange takes place. The address information consists of message addresses.

NOTE For a detailed description of address information, see 5.3.2.

#### 6.4.6.3 Protocol control information (N\_PCI)

This field identifies the type of N\_PDUs exchanged. It is also used to exchange other control parameters between the communicating network layer entities.

NOTE For a detailed specification of all N\_PCI parameters, see 6.5.

#### 6.4.6.4 Data Field (N\_Data)

The N\_Data in the N\_PDU is used to transmit the service user data received in the <MessageData> parameter in the N\_USData request service call. The <MessageData>, if needed, is segmented into smaller parts that each fit into the N\_PDU data field before they are transmitted over the network.

The size of N\_Data depends on the N\_PDU type and the address format chosen.

## 6.5 Protocol control information specification

### 6.5.1 N\_PCI

Each N\_PDU is identified by means of an N\_PCI. See Tables 3 and 4.

---

4) Optional.

Table 3 — Summary of N\_PCI bytes

N_PDU name	N_PCI bytes			
	Byte #1		Byte #2	Byte #3
	Bits 7 – 4	Bits 3 – 0		
SingleFrame (SF)	N_PCIttype = 0	SF_DL	N/A	N/A
FirstFrame (FF)	N_PCIttype = 1	FF_DL		N/A
ConsecutiveFrame (CF)	N_PCIttype = 2	SN	N/A	N/A
FlowControl (FC)	N_PCIttype = 3	FS	BS	STmin

Table 4 — Definition of N\_PCIttype values

Hex value	Description
0	<b>SingleFrame</b> For unsegmented messages, the network layer protocol provides an optimized implementation of the network protocol with the message length embedded in the PCI byte only. SingleFrame (SF) shall be used to support the transmission of messages that can fit in a single CAN frame.
1	<b>FirstFrame</b> A FirstFrame (FF) shall only be used to support the transmission of messages that cannot fit in a single CAN frame, i.e. segmented messages. The first frame of a segmented message is encoded as an FF. <u>On receipt of an FF, the receiving network layer entity shall start assembling the segmented message.</u>
2	<b>ConsecutiveFrame</b> When sending segmented data, all consecutive frames following the FF are encoded as ConsecutiveFrame (CF). On receipt of a CF, the receiving network layer entity shall assemble the received data bytes until the whole message is received. The receiving entity shall <u>pass the assembled message to the adjacent upper protocol layer after the last frame of the message has been received without error.</u>
3	<b>FlowControl</b> The purpose of FlowControl (FC) is to regulate the rate at which CF N_PDUs are sent to the receiver. Three distinct types of FC protocol control information are specified to support this function. The type is indicated by a field of the protocol control information called FlowStatus (FS), as defined <u>hereafter.</u>
4 – F	<b>Reserved</b> This range of values is reserved by this part of ISO 15765.

## 6.5.2 SingleFrame N\_PCI parameter definition

### 6.5.2.1 SF N\_PCI byte

Table 5 provides an overview of the SF N\_PCI byte.

Table 5 — Overview of SF N\_PCI byte

N_PDU name	SF N_PCI byte							
	Byte #1							
	7	6	5	4	3	2	1	0
SingleFrame	0	0	0	0	SF_DL			

The parameter SingleFrame DataLength (SF\_DL) is used in the SF N\_PDU to specify the number of service user data bytes. See Table 6.

Table 6 — Definition of SF\_DL values

Hex value	Description
0	<b>Reserved</b> This value is reserved by part of ISO 15765.
1 – 6	<b>SingleFrame DataLength (SF_DL)</b> 功能寻址最多6 The SF_DL is encoded in the low nibble of N_PCI byte #1 value. It shall be assigned the value of the service parameter <Length>. 字节
7	<b>SingleFrame DataLength (SF_DL) with normal addressing</b> 正常寻址 SF_DL = 7 is only allowed with normal addressing.
8 – F	<b>Invalid</b> This range of values is invalid.

6.5.2.2 SF\_DL error handling 忽略接收到的数据：等于0，大于7或扩展、混合寻址大于6

If the network layer receives an SF with an SF\_DL equal to zero (0), then the network layer shall ignore the received SF N\_PDU.

If the network layer receives an SF with an SF\_DL greater than 7 when using normal addressing, or greater than 6 for extended or mixed addressing, then the network layer shall ignore the received SF N\_PDU.

6.5.3 FirstFrame N\_PCI parameter definition

6.5.3.1 FF N\_PCI bytes

Table 7 provides an overview of the FF N\_PCI bytes.

Table 7 — Overview of FF N\_PCI bytes

N_PDU name	FF N_PCI bytes							
	Byte #1							Byte #2
	7	6	5	4	3	2	1	0
FirstFrame	0	0	0	1	FF_DL			

6.5.3.2 FirstFrame DataLength (FF\_DL) parameter definition

The parameter FF\_DL is used in the FF N\_PDU to specify the number of service user data bytes. See Table 8.



Table 8 — Definition of FF\_DL values

Hex value	Description
0 – 6	<b>Invalid</b> This range of values is invalid. 单帧即可传输，不需要多帧
7	<b>FirstFrame DataLength (FF_DL) with extended addressing or mixed addressing</b> FF_DL = 7 is <u>only allowed with extended or mixed addressing.</u> 扩展或混合寻址
8 – FFF	<b>FirstFrame DataLength (FF_DL)</b> The encoding of the segmented message length results in a twelve (12) bit length value (FF_DL) where the <u>least significant bit (LSB) is specified to be bit "0" of the N_PCI byte #2 and the most significant bit (MSB) is bit three (3) of the N_PCI byte #1.</u> The maximum segmented message length supported is equal to 4 095 bytes of user data. It shall be assigned the value of the service parameter <Length>.

### 6.5.3.3 FF\_DL error handling

If the network layer receives an FF with an FF\_DL that is greater than the available receiver buffer size, then this shall be considered as an error condition. The network layer shall abort the message reception and send an FC N\_PDU with the parameter FlowStatus = Overflow.

If the network layer receives an FF with an FF\_DL that is less than (eight) 8 when using normal addressing or less than 7 when using extended or mixed addressing, then the network layer shall ignore the received FF N\_PDU and not transmit an FC N\_PDU.

### 6.5.4 ConsecutiveFrame N\_PCI parameter definition

#### 6.5.4.1 CF N\_PCI byte

Table 9 provides an overview of the CF N\_PCI byte.

Table 9 — Overview of CF N\_PCI byte

N_PDU name	CF N_PCI byte							
	Byte #1							
	7	6	5	4	3	2	1	0
ConsecutiveFrame	0	0	1	0	SN			

#### 6.5.4.2 SequenceNumber (SN) parameter definition

The parameter SN is used in the CF N\_PDU to specify the order of the consecutive frames. 说明连续帧的顺序

- The SN shall start with zero (0) for all segmented messages. The FF shall be assigned the value zero (0). It does not include an explicit SequenceNumber in the N\_PCI field but shall be treated as the segment number zero (0). 明确的 即便FF中没有SN，但默认其SN为0
- The SN of the first CF that immediately follows the FF shall be set to one (1).
- The SN shall be incremented by one (1) for each new CF that is transmitted during a segmented message transmission.
- The SN value shall not be affected by any FC frame.
- When the SN reaches the value of fifteen (15), it shall wraparound and be set to zero (0) for the next CF. 循环处理

This shall lead to the sequence given in Table 10.

See Table 11 for SN values.

Table 10 — Summary of SN definition

N_PDU	FF	CF	CF	CF	CF	CF	CF	CF
SN (hex)	0	1	...	E	F	0	1	...

Table 11 — Definition of SN values

Hex value	Description
0 – F	<b>SequenceNumber (SN)</b> The SequenceNumber (SN) shall be encoded in the lower nibble bits of N_PCI byte #1. The SN shall be set to a value within the range of <u>zero (0) to fifteen (15)</u> .

#### 6.5.4.3 SN error handling 当接收到错误帧号的连续帧时，报文接收将被中断，网络层将发送参数<N\_Result>=N\_WRONG\_的 N\_USData.indication服务至相应上层

If a CF N\_PDU message is received with an incorrect sequence number, then proper error handling shall take place in the network layer. The message reception shall be aborted, and the network layer shall make an N\_USData.indication service call with the parameter <N\_Result> = N\_WRONG\_SN to the adjacent upper layer.

#### 6.5.5 FlowControl N\_PCI parameter definition

##### 6.5.5.1 FlowControl N\_PCI bytes

Table 12 provides an overview of the FC N\_PCI bytes.

Table 12 — Overview of FC N\_PCI bytes

N_PDU name	FC N_PCI bytes									
	Byte #1								Byte #2	Byte #3
	7	6	5	4	3	2	1	0		
FlowControl	0	0	1	1	FS				BS	STmin

### 6.5.5.2 FlowStatus (FS) parameter definition

The parameter FlowStatus (FS) indicates whether the sending network entity can proceed with the message transmission.

A sending network entity shall support all specified (not reserved) values of the FS parameter.

Table 13 — Definition of FS values

Hex value	Description
<u>0</u>	<b>ContinueToSend (CTS)</b> 已准备后接受至多BS的CF 4位 The FlowControl ContinueToSend parameter shall be encoded by setting the lower nibble of the N_PCI byte #1 to "0". It shall cause the sender to resume the sending of Consecutive frames. The meaning of this value is that the receiver is ready to receive a maximum of BS number of Consecutive frames.
<u>1</u>	<b>Wait (WT)</b> The FlowControl Wait parameter shall be encoded by setting the lower nibble of the N_PCI byte #1 to "1". It shall cause the sender to continue to wait for a new FlowControl N_PDU and to restart its N_BS timer.
<u>2</u>	<b>Overflow (OVFLW)</b> The FlowControl Overflow parameter shall be encoded by setting the lower nibble of the N_PCI byte #1 to "2". It shall cause the sender to abort the transmission of a segmented message and make an N_USData.confirm service call with the parameter <N_Result>=N_BUFFER_OVFLW. This N_PCI FlowStatus parameter value is only allowed to be transmitted in the FlowControl N_PDU that follows the FirstFrame N_PDU and shall only be used in case the message length FF_DL of the received FirstFrame N_PDU exceeds the buffer size of the receiving entity. 只能在FF或FF_DL超过缓冲区大小时发送
<u>3 – F</u>	<b>Reserved</b> This range of values is reserved by this part of ISO 15765.

### 6.5.5.3 FS error handling

If an FC N\_PDU message is received with an invalid (reserved) FS parameter value, then proper error handling shall take place in the network layer. The message transmission shall be aborted, and the network layer shall make an N\_USData.confirm service call with the parameter <N\_Result> = N\_INVALID\_FS to the adjacent upper layer.

### 6.5.5.4 BlockSize (BS) parameter definition

The BS parameter shall be encoded in byte #2 of the FC N\_PCI.

The units of BS are the absolute number of CF N\_PDUs per block.

EXAMPLE If BS is equal to twenty (20) (decimal), then the block will consist of twenty (20) (decimal) CF N\_PDUs. FF不算在内？

Only the last block of consecutive frames in a segmented data transmission may have less than the BS number of frames.

Table 14 provides an overview of the FC N\_PCI byte.

Table 14 — Definition of BS values

Hex value	Description
00	<b>BlockSize (BS)</b> The BS parameter value zero (0) shall be used to indicate to the sender that no more FC frames shall be sent during the transmission of the segmented message. The sending network layer entity shall send all remaining consecutive frames without any stop for further FC frames from the receiving network layer entity.
01 – FF	<b>BlockSize (BS)</b> This range of BS parameter values shall be used to indicate to the sender the maximum number of consecutive frames that can be received without an intermediate FC frame from the receiving network entity.

#### 6.5.5.5 Definition of SeparationTime (STmin) parameter

The STmin parameter shall be encoded in byte #3 of the FC N\_PCI.

This time is specified by the receiving entity and shall be kept by the sending network entity for the duration of a segmented message transmission.

The STmin parameter value specifies the minimum time gap allowed between the transmission of consecutive frame network protocol data units. See Table 15.

Table 15 — Definition of STmin values

Hex value	Description
00 – 7F	<b>SeparationTime (STmin) range: 0 ms – 127 ms</b> The units of STmin in the range 00 hex – 7F hex are absolute milliseconds (ms).
80 – F0	<b>Reserved</b> This range of values is reserved by this part of ISO 15765.
F1 – F9	<b>SeparationTime (STmin) range: 100 µs – 900 µs</b> The units of STmin in the range F1 hex – F9 hex are even 100 microseconds (µs), where parameter value F1 hex represents 100 µs and parameter value F9 hex represents 900 µs.
FA – FF	<b>Reserved</b> This range of values is reserved by this part of ISO 15765.

The measurement of the STmin starts after completion of transmission of a ConsecutiveFrame (CF) and ends at the request for the transmission of the next CF. 从CF成功传输开始到下一个CF请求结束的时间。

EXAMPLE If STmin is equal to ten (10) (decimal), then the minimum ST authorized between consecutive frame network protocol data units is equal to 10 ms.

#### 6.5.5.6 ST error handling

If an FC N\_PDU message is received with a reserved ST parameter value, then the sending network entity shall use the longest ST value specified by this part of ISO 15765 (7F hex – 127 ms) instead of the value received from the receiving network entity for the duration of the ongoing segmented message transmission.

## 6.6 Maximum number of FC.Wait frame transmissions (N\_WFTmax)

接收方最多连续发送多少个等待FC帧个数

The purpose of this variable is to avoid communication sender nodes being potentially hooked-up in case of a fault condition whereby the latter could be waiting continuously. This parameter is local to communication peers and is not transmitted, and is hence not part of the FC protocol data unit.

- The N\_WFTmax parameter shall indicate how many FC N\_PDU WTs can be transmitted by the receiver in a row.
- The N\_WFTmax parameter upper limit shall be user defined at system generation time.
- The N\_WFTmax parameter shall only be used on the receiving network entity during message reception.
- If N\_WFTmax parameter value is set to zero (0), then flow control shall rely upon flow control continue to send FC N\_PDU CTS only. Flow control wait (FC N\_PDU WT) shall not be used by that network entity.

## 6.7 Network layer timing


### 6.7.1 Timing parameters

Figure 7 shows the network layer timing parameters, while Table 16 defines the network layer timing parameter values and their corresponding start and end positions based on the data link layer services.

Performance requirement values are the binding communication requirements to be met by each communication peer in order to be compliant with the specification. A certain application may define specific performance requirements within the ranges defined in Table 16.

Timeout values are defined to be higher than the values for the performance requirements in order to ensure a working system and to overcome communication conditions where the performance requirement can absolutely not be met (e.g. high bus load). Specified timeout values shall be treated as the lower limit for any given implementation. The real timeout shall occur no later than at the specified timeout value + 50 %.

The network layer shall issue an appropriate service primitive to the network layer service user upon detection of an error condition.



© ISO 2004 – All rights reserved

Table 16 — Network layer timing parameter values

Timing Parameter	Description	Data Link Layer service		Timeout (ms)	Performance requirement (ms)
		Start	End		
N_As	Time for transmission of the CAN frame (any N_PDU) on the sender side	L_Data.request	L_Data.confirm	1 000	N/A
N_Ar	Time for transmission of the CAN frame (any N_PDU) on the receiver side	L_Data.request	L_Data.confirm	1 000	N/A
N_Bs	Time until reception of the next FlowControl N_PDU.	L_Data.confirm (FF), L_Data.confirm (CF), L_Data.indication (FC)	L_Data.indication (FC)	1 000	N/A
N_Br	Time until transmission of the next FlowControl N_PDU	L_Data.indication (FF), L_Data.confirm (FC)	L_Data.request (FC)	N/A	$(N_{Br} + N_{Ar}) < (0.9 * N_{Bs} \text{ timeout})$
N-Cs	Time until transmission of the next ConsecutiveFrame N_PDU	L_Data.indication (FC), L_Data.confirm (CF)	L_Data.request (CF)	N/A	$(N_{Cs} + N_{As}) < (0.9 * N_{Cr} \text{ timeout})$
N_Cr	Time until reception of the next ConsecutiveFrame N_PDU	L_Data.confirm (FC), L_Data.indication (CF)	L_Data.indication (CF)	1 000	—
s is the sender of the message. r is the receiver of the message.					

### 6.7.2 Network layer timeouts

Table 17 defines the cause and action in a network layer timeout.

Table 17 — Network layer timeout error handling

Timeout	Cause	Action
N_As	Any N_PDU not transmitted in time on the sender side.	Abort message transmission and issue N_USData.confirm with $\langle N\_Result \rangle = N\_TIMEOUT\_A$ .
N_Ar	Any N_PDU not transmitted in time on the receiver side.	Abort message reception and issue N_USData.indication with $\langle N\_Result \rangle = N\_TIMEOUT\_A$ .
N_Bs	FlowControl N_PDU not received (lost, overwritten) on the sender side or preceding FirstFrame N_PDU or ConsecutiveFrame N_PDU not received (lost, overwritten) on the receiver side.	Abort message transmission and issue N_USData.confirm with $\langle N\_Result \rangle = N\_TIMEOUT\_Bs$ .
N_Cr	ConsecutiveFrame N_PDU not received (lost, overwritten) on the receiver side or preceding FC N_PDU not received (lost, overwritten) on the sender side.	Abort message reception and issue N_USData.indication with $\langle N\_Result \rangle = N\_TIMEOUT\_Cr$ .

### 6.7.3 Unexpected arrival of N\_PDU

An unexpected N\_PDU is defined as one that has been received by a node outside the expected order of N\_PDUs. It could be an N\_PDU defined by this part of ISO 15765 (SF N\_PDU, FF N\_PDU, CF N\_PDU or FC N\_PDU) that is received out of the normal expected order, or else it could be an unknown N\_PDU that cannot be interpreted by the definitions given in this document.

Depending on the network layer design decision to support full- or half-duplex communication, the interpretation of “unexpected” differs:

- a) with half-duplex, point-to-point communication between two nodes is only possible in one direction at a time;
- b) with full-duplex, point-to-point communication between two nodes is possible in both directions at one time.

In addition to the network layer design decision, the possibility has to be considered that a reception or transmission from/to a node with the same address information (N\_AI), as contained in the received unexpected N\_PDU, is in progress.

As a general rule, arrival of an unexpected N\_PDU from any node shall be ignored, with the exception of SF N\_PDUs and physically addressed FF N\_PDUs; functionally addressed first frames shall be ignored. When the specified action is to ignore an unexpected N\_PDU, this means that the network layer shall not notify the upper layers of its arrival. 到来

Table 18 defines the network layer behaviour in the case of the reception of an unexpected N\_PDU, in consideration of the actual network layer internal status (NWL status) and the design decision to support half- or full-duplex communication. It has to be understood that the received N\_PDU will contain the same N\_AI as the reception or transmission that could be in progress at the time the N\_PDU is received.

非预期帧处理

Table 18 — Handling of unexpected arrival of N\_PDU

NWL status	Reception of				
	SF N_PDU	FF N_PDU	CF N_PDU	FC N_PDU	Unknown N_PDU
Segmented Transmit in progress	Full-duplex: If a reception is in progress, see corresponding cell below in this table, otherwise process the SF N_PDU as the start of a new reception.	Full-duplex: If a reception is in progress, see corresponding cell below in this table, otherwise process the FF N_PDU as the start of a new reception.	Full-duplex: If a reception is in progress, see corresponding cell below in this table.	If awaited, process the FC N_PDU, otherwise ignore it.	Ignore
	Half-duplex: ignore	Half-duplex: ignore	Half-duplex: ignore		
Segmented Receive in progress	Terminate the current reception, report an N_USData.indication, with <N_Result> set to N_UNEXP_PDU, to the upper layer, and process the SF N_PDU as the start of a new reception.	Terminate the current reception, report an N_USData.indication, with <N_Result> set to N_UNEXP_PDU, to the upper layer, and process the FF N_PDU as the start of a new reception.	If awaited, process the CF N_PDU in the on-going reception and perform the required checks (e.g. SN in right order), otherwise ignore it.	Full-duplex: If a transmission is in progress, see corresponding cell above in this table.	Ignore
				Half-duplex: Ignore	
Idle <sup>a</sup>	Process the SF N_PDU as the start of a new reception.	Process the FF N_PDU as the start of a new reception.	Ignore	Ignore	Ignore

<sup>a</sup> Neither a segmented transmission nor segmented reception is in progress.



#### 6.7.4 Wait frame error handling

When the receiver has transmitted N\_WFTmax flow control wait network protocol data units (FC N\_PDU WT) in a row and following this it cannot meet the performance requirement for the transmission of a flow control clear to send network protocol data unit (FC NPDU CTS), then the receiver side shall abort the message reception and issue an N\_USData.indication with <N\_Result> set to N\_WFT\_OVRN to the higher layer.

The sender of the message is informed about the aborted message reception via an N\_USData.confirm with <N\_Result> set to N\_TIMEOUT\_Bs (because of the missing FlowControl N\_PDU from the receiver an N\_Bs timeout occurs in the sender).

#### 6.8 Interleaving of messages

The network layer protocol shall be capable of carrying out parallel transmission of different messages that are not mapped onto the same N\_AI. This is necessary to ensure that the receiving peer is able to reassemble in a consistent manner the received network protocol data units. This scheme for example enables gateway operation that needs to handle different message transmissions concurrently across distinct sub-networks.

### 7 Data link layer usage 数据链路层用法

#### 7.1 Data link layer interface services 数据链路层接口服务

##### 7.1.1 L\_Data.request NWL to DLL

The service primitive requests transmission of <Data> that shall be mapped within specific attributes of the data link protocol data unit selected by means of <Identifier>.

The <Identifier> shall provide reference to the specific addressing format used to transmit <Data>:

```
L_Data.request (
    <Identifier>
    <DLC>
    <Data>
)
```

##### 7.1.2 L\_Data.confirm DLL to NWL

The service primitive confirms the completion of an L\_Data.request service for a specific <Identifier>.

The parameter <TransferStatus> provides the status of the service request:

```
L_Data.confirm (
    <Identifier>
    <TransferStatus>
)
```

##### 7.1.3 L\_Data.indication DLL to NWL

The service primitive indicates data link layer event to the adjacent upper layer and delivers <Data> identified by <Identifier>:

```
L_Data.indication (
    <Identifier>
    <DLC>
    <Data>
)
```

7.2 Data link layer service parameters 数据链路层服务参数

The following data link layer service parameters are defined in ISO 11898-1:

- <Identifier>: CAN identifier
- <DLC>: Data Length Code
- <Data>: CAN frame data
- <TransferStatus>: Status of a transmission

7.3 Mapping of the N\_PDU fields N\_PDU区域的映射

7.3.1 Addressing formats

The exchange of network layer data is supported by three addressing formats: 1. normal, 2. extended and 3. mixed addressing. Each addressing format requires a different number of CAN frame data bytes to encapsulate the addressing information associated with the data to be exchanged. Consequently, the number of data bytes transported within a single CAN frame depends on the type of addressing format chosen. 不同地址模式，单个CAN帧数据长度不同

The following (7.3.2 to 7.3.5) specifies the mapping mechanisms for each addressing format, based on the data link layer services and service parameters defined in ISO 11898-1.

7.3.2 Normal addressing

物理、功能 消息类型：诊断、远程诊断

For each combination of N\_SA, N\_TA, N\_TAtype and Mtype, a unique CAN identifier is assigned. N\_PCI and N\_Data is placed in the CAN frame data field. See Table 19.

Table 19 — Mapping of N\_PDU parameters into CAN frame — Normal addressing

N_PDU type	CAN Identifier	CAN frame data field							
		Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
SingleFrame (SF)	N_AI	N_PCI	N_Data						
FirstFrame (FF)	N_AI	N_PCI		N_Data					
ConsecutiveFrame (CF)	N_AI	N_PCI	N_Data						
FlowControl (FC)	N_AI	N_PCI			N/A				

11位CAN id, 没有填充形式, 系统设计

7.3.3 Normal fixed addressing

Normal fixed addressing is a subformat of normal addressing where the mapping of the address information into the CAN identifier is further defined. In the general case of normal addressing, described above, the correspondence between N\_AI and the CAN identifier is left open.

正常固定寻址  
For normal fixed addressing, only 29 bit CAN identifiers are allowed. Tables 20 and 21 define the mapping of the address information (N\_AI) into the CAN identifier, depending on the target address type (N\_TAtype). N\_PCI and N\_Data is placed in the CAN frame data field.

**Table 20 — Normal fixed addressing, N\_TAtype = physical**

N_PDU type	29 bit CAN Identifier bit position							CAN frame data field byte position							
	28 ... 26	25	24	23 ... 16	15	8	7 ... 0	1	2	3	4	5	6	7	8
SingleFrame (SF)	110 (bin)	0	0	218 (dec)	N_TA	N_SA	N_PCI	N_Data							
FirstFrame (FF)	110 (bin)	0	0	218 (dec)	N_TA	N_SA	N_PCI	N_Data							
ConsecutiveFrame (CF)	110 (bin)	0	0	218 (dec)	N_TA	N_SA	N_PCI	N_Data							
FlowControl (FC)	110 (bin)	0	0	218 (dec)	N_TA	N_SA	N_PCI	N/A							

**Table 21 — Normal fixed addressing, N\_TAtype = functional**

N_PDU type	29 bit CAN Identifier bit position							CAN frame data field byte position							
	28 ... 26	25	24	23 ... 16	15	8	7 ... 0	1	2	3	4	5	6	7	8
SingleFrame (SF)	110 (bin)	0	0	219 (dec)	N_TA	N_SA	N_PCI	N_Data							
FirstFrame (FF)	110 (bin)	0	0	219 (dec)	N_TA	N_SA	N_PCI	N_Data							
ConsecutiveFrame (CF)	110 (bin)	0	0	219 (dec)	N_TA	N_SA	N_PCI	N_Data							
FlowControl (FC)	110 (bin)	0	0	219 (dec)	N_TA	N_SA	N_PCI	N/A							

### 7.3.4 Extended addressing

仅用于11位ID

For each combination of N\_SA, N\_TAtype and Mtype, a unique CAN identifier is assigned. N\_TA is placed in the first data byte of the CAN frame data field. N\_PCI and N\_Data is placed in the remaining bytes of the CAN frame data field.

**Table 22 — Mapping of N\_PDU parameters into CAN frame — Extended addressing**

N_PDU type	CAN Identifier	Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
SingleFrame (SF)	N_AI, except N_TA	N_TA	N_PCI	N_Data					
FirstFrame( FF)	N_AI, except N_TA	N_TA	N_PCI	N_Data					
ConsecutiveFrame (CF)	N_AI, except N_TA	N_TA	N_PCI	N_Data					
FlowControl (FC)	N_AI, except N_TA	N_TA	N_PCI	N/A					

### 7.3.5 Mixed addressing

#### 7.3.5.1 29 bit CAN identifier

Mixed addressing is the addressing format to be used if Mtype is set to remote diagnostics

Tables 23 and 24 define the mapping of the address information (N\_AI) into the 29 bit CAN identifier scheme and the first CAN frame data byte, depending on the target address type (N\_TAtype). N\_PCI and N\_Data are placed in the remaining bytes of the CAN frame data field.

**Table 23 — Mixed addressing with 29 bit CAN Identifier, N\_TAtype = physical**

N_PDU type	29 bit CAN Identifier bit position							CAN frame data field byte position							
	28 ... 26	25	24	23 ... 16	15	8	7 ... 0	1	2	3	4	5	6	7	8
SingleFrame (SF)	110 (bin)	0	0	206 (dec)	N_TA	N_SA	N_AE	N_PCI	N_Data						
FirstFrame (FF)	110 (bin)	0	0	206 (dec)	N_TA	N_SA	N_AE	N_PCI		N_Data					
ConsecutiveFrame (CF)	110 (bin)	0	0	206 (dec)	N_TA	N_SA	N_AE	N_PCI	N_Data						
FlowControl (FC)	110 (bin)	0	0	206 (dec)	N_TA	N_SA	N_AE	N_PCI			N/A				

**Table 24 — Mixed addressing with 29 bit CAN Identifier, N\_TAtype = functional**

N_PDU type	29 bit CAN Identifier bit position							CAN frame data field byte position							
	28 ... 26	25	24	23 ... 16	15	8	7 ... 0	1	2	3	4	5	6	7	8
SingleFrame (SF)	110 (bin)	0	0	205 (dec)	N_TA	N_SA	N_AE	N_PCI	N_Data						
FirstFrame (FF)	110 (bin)	0	0	205 (dec)	N_TA	N_SA	N_AE	N_PCI		N_Data					
ConsecutiveFrame (CF)	110 (bin)	0	0	205 (dec)	N_TA	N_SA	N_AE	N_PCI	N_Data						
FlowControl (FC)	110 (bin)	0	0	205 (dec)	N_TA	N_SA	N_AE	N_PCI			N/A				

### 7.3.5.2 11 bit CAN identifier

Mixed addressing is the addressing format to be used if Mtype is set to remote diagnostics.

Table 25 defines the mapping of the address information (N\_AI) into the 11 bit CAN identifier scheme. For each combination of N\_SA, N\_TA and N\_TAtype a unique CAN identifier is assigned. N\_AE is placed in the first data byte of the CAN frame data field. N\_PCI and N\_Data is placed in the remaining bytes of the CAN frame data field.

**Table 25 — Mixed addressing (11 bit CAN Id)**

N_PDU type	CAN Identifier	CAN frame data field byte position							
		Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
SingleFrame (SF)	N_AI	N_AE	N_PCI	N_Data					
FirstFrame( FF)	N_AI	N_AE	N_PCI		N_Data				
ConsecutiveFrame (CF)	N_AI	N_AE	N_PCI	N_Data					
FlowControl (FC)	N_AI	N_AE	N_PCI			N/A			

## 7.4 CAN frame Data Length Code (DLC)

### 7.4.1 DLC parameter

The DLC parameter specifies the number of data bytes transmitted in a CAN frame. This part of ISO 15765 does not specify any requirements concerning the length of the data field in a CAN frame other than those implied by the size of the network layer protocol data units.

An application that implements the network layer as defined in this document might either pad all CAN frames to their full length (see 7.4.2) or optimize the DLC to the applicable length of the network layer protocol data unit (see 7.4.3).

#### 7.4.2 CAN frame data padding

The DLC is always set to 8. If the N\_PDU to be transmitted is shorter than 8 bytes, then the sender has to set the DLC to the maximum value 8 (padding of unused data bytes). In particular this can be the case for an SF, FC frame or last CF of a segmented message. 这个情况尤其是出现在SF, FC或最后一个CF

The DLC parameter of the CAN frame is set by the sender and read by the receiver to determine the number of data bytes per CAN frame to be processed by the network layer. The DLC parameter cannot be used to determine the message length; this information shall be extracted from the N\_PCI information in the beginning of a message. 不能用于确定信息长度，应该从开始信息的PCI中获取

#### 7.4.3 CAN frame data optimization

The DLC does not always need to be 8. If the N\_PDU to be transmitted is shorter than 8 bytes, then the sender may optimize the CAN bus load by shortening the CAN frame data to only contain the number of bytes occupied by the N\_PDU (no padding of unused data bytes). CAN frame data optimization can only be used for a SF, FC frame or last CF of a segmented message.

The DLC parameter of the CAN frame is set by the sender and read by the receiver to determine the number of data bytes per CAN frame to be processed by the network layer. The DLC parameter cannot be used to determine the message length; this information shall be extracted from the N\_PCI information in the beginning of a message.

#### 7.4.4 Data Length Code error handling

Depending on the N\_PCI value, the network layer can calculate the smallest expected value for the CAN DLC parameter in a received CAN frame.

The reception of a CAN frame with a DLC value smaller than expected (less than 8 for applications which pad the CAN frames or smaller than implied by the size of the network protocol data unit for optimized implementations) shall be ignored by the network layer without any further action.

## Annex A (informative)

### Use of normal fixed and mixed addressing with data link layer according to SAE J1939

#### A.1 Overview

This annex describes how to map address information parameters, N\_AI, into the CAN frame when a data link layer according to SAE J1939 is used.

#### A.2 Rules

##### A.2.1 Normal fixed addressing

Table A.1 shows the mapping of address information parameters, N\_AI, into the CAN frame when Network Target Address type, N\_TAtype, physical addressing is used.

**Table A.1 — Normal addressing, physical addressed messages**

J1939 name	P	R	DP	PF	PS	SA	Data field
Bits	3	1	1	8	8	8	64
Content	default 110 (bin)	0	0	218 (dec)	N_TA	N_SA	N_PCI, N_Data
CAN Id Bits	28 – 26	25	24	23 – 16	15 – 8	7 – 0	
CAN data byte							1 – 8
CAN Field	Identifier						Data

Table A.2 shows the mapping of address information parameters, N\_AI, into the CAN frame when Network Target Address type, N\_TAtype, functional addressing is used.

**Table A.2 — Normal addressing, functional addressed messages**

J1939 name	P	R	DP	PF	PS	SA	Data field
Bits	3	1	1	8	8	8	64
Content	default 110 (bin)	0	0	219 (dec)	N_TA	N_SA	N_PCI, N_Data
CAN Id Bits	28 – 26	25	24	23 – 16	15 – 8	7 – 0	
CAN data byte							1 – 8
CAN Field	Identifier						Data

协议控制信息  
数据

## A.2.2 Mixed addressing

Table A.3 shows the mapping of address information parameters, N\_AI, into the CAN frame when the Network Target Address type, N\_TAtype, physical addressing is used.

**Table A.3 — Mixed addressing, physical addressed messages**

J1939 name	P	R	DP	PF	PS	SA	Data field	
Bits	3	1	1	8	8	8	8	56
Content	default 110 (bin)	0	0	206 (dec)	N_TA	N_SA	N_AE	N_PCI, N_Data
CAN Id Bits	28 – 26	25	24	23 – 16	15 – 8	7 – 0		
CAN data byte							1	2 – 8
CAN Field	Identifier						Data	

Table A.4 shows the mapping of address information parameters, N\_AI, into the CAN frame when Network Target Address type, N\_TAtype, functional addressing is used. 地址信息

**Table A.4 — Mixed addressing, functional addressed messages**

J1939 name	P	R	DP	PF	PS	SA	Data field	
Bits	3	1	1	8	8	8	8	56
Content	default 110 (bin)	0	0	205 (dec)	N_TA	N_SA	N_AE	N_PCI, N_Data
CAN Id Bits	28 – 26	25	24	23 – 16	15 – 8	7 – 0		
CAN data byte	优先级	0	0	目的指定	目的地址	源地址	1	2 – 8
CAN Field	Identifier						Data	

## A.2.3 Priority (P)

混合寻址：物理寻址205（CD）；功能寻址206（CE）；  
正常固定寻址：物理寻址218（DA）；功能寻址219（DB）；

The priority is user defined with a default value of six (6).

The three bits priority field is used to optimize message latency for transmission onto the CAN bus only. The priority field should be masked off by the receiver (ignored). The priority of any CAN message can be set from highest, 0 (000 bin), to lowest, 7 (111 bin).

## A.2.4 Reserved bit (R)

The reserved bit shall be set to “0”.

## A.2.5 Data Page (DP)

The data page bit shall be set to “0”.

## A.2.6 Protocol data unit format (PF)

The format is of the type PDU1, “destination specific”. 目的指定

Diagnostic messages shall use the following parameter group numbers (PGN).

- Mixed addressing: 52480 (dec) for N\_TAtype = functional, which gives PF = 205 (dec).
- Mixed addressing: 52736 (dec) for N\_TAtype = physical, which gives PF = 206 (dec).
- Normal fixed addressing: 55808 (dec) for N\_TAtype = physical, which gives PF = 218 (dec),
- Normal fixed addressing: 56064 (dec) for N\_TAtype = functional, which gives PF = 219 (dec).

### **A.2.7 PDU-specific (PS)**

The PDU-specific field shall contain the target address (destination address), N\_TA.

### **A.2.8 Source Address (SA)**

The SA field shall contain the source address, N\_SA.

### **A.2.9 Update rate**

Update rate is according to user requirements.

### **A.2.10 Data length**

Data length shall be eight (8) bytes.



## Bibliography

- [1] ISO/IEC 7498 (all parts), *Information technology — Open Systems Interconnection — Basic Reference Model*
- [2] ISO/IEC 10731, *Information technology — Open Systems Interconnection — Basic Reference Model — Conventions for the definition of OSI services*
- [3] ISO 11898 (all parts), *Road vehicles — Controller area network (CAN)*
- [4] ISO 14229-1, *Road vehicles — Unified diagnostic services (UDS) — Part 1: Specification and requirements<sup>5)</sup>*
- [5] ISO 15031-5, *Road vehicles — Communication between vehicle and external equipment for emissions-related diagnostics — Part 5: Emissions-related diagnostic services<sup>5)</sup>*
- [6] SAE J1939, *Recommended Practice for a Serial Control and Communications Vehicle Network*

---

5) To be published.

