Learning the setup: error 33 % → 2.0 %; a fine mesh: 1.1 %
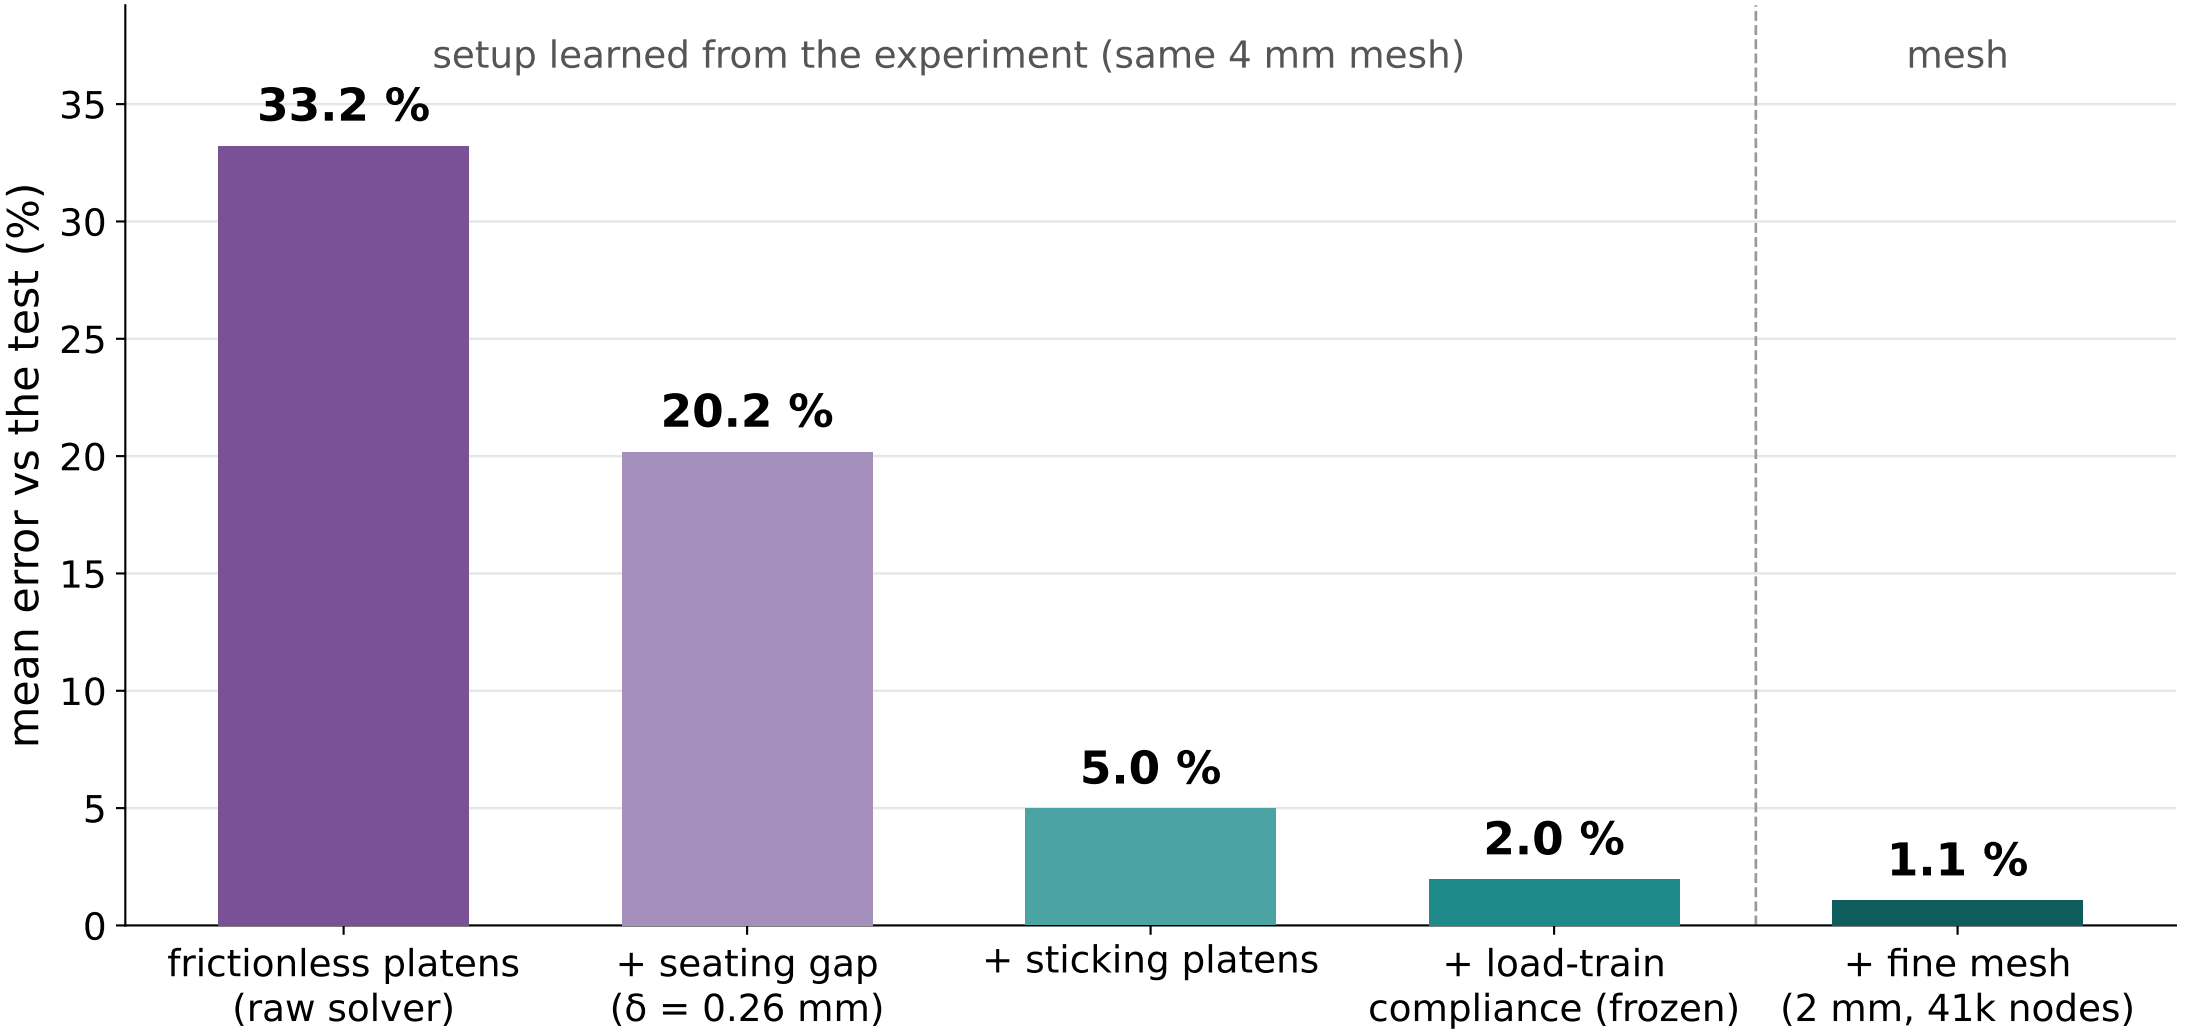
mean |F_sim - F_test| / F_test at 0.5, 1.0, 1.5, 2.0, 2.5 mm crosshead travel; CalculiX J2 + NLGEOM;
seating gap and compliance fitted once on the 2 mm mesh, then frozen