


After post-training (most accurate mesh, 8,753 nodes) at the real first crack: 2.51 mm crosshead, simulated 4,823 N (test 4,755 N)

Colour: largest tension s1 (MPa, true scale deformation); grey: no tension; dark red: over the resin's strength 50.5 MPa.
Stress criterion: no break predicted; A is at 85% of the strength, just over the 85% 'potential crack' tier (42.9 MPa).
A is where the printed part cracked first (observed by the team: the lower inner bore; no photo in the repo).

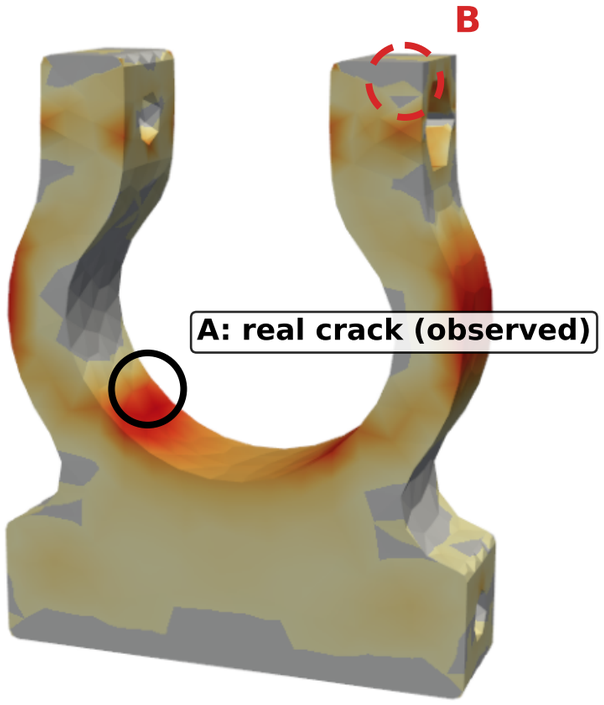



A: real crack site (observed): lower inner bore
s1 = 43.0 MPa (85% of strength), f5 (inner bore)

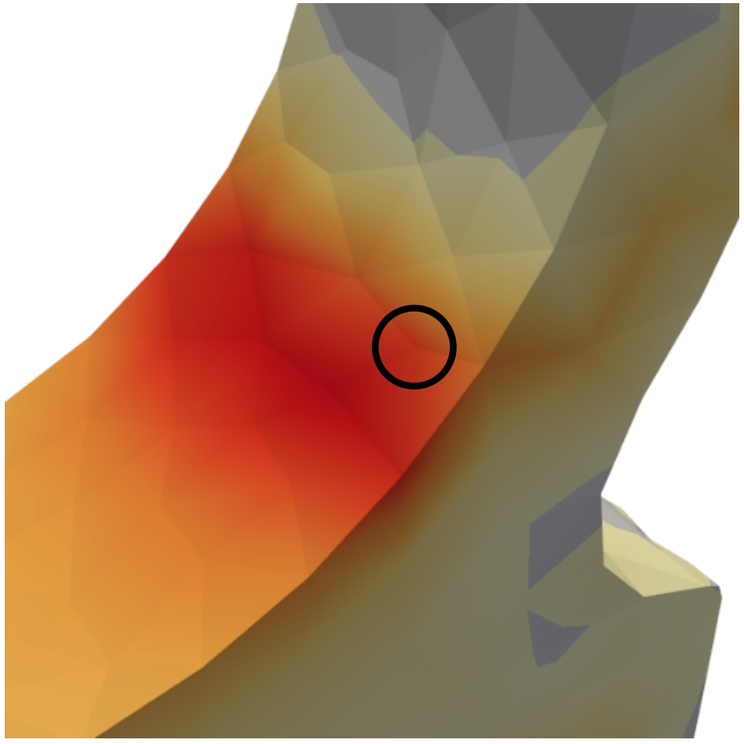

xyz = (-14.6, -13.2, -4.3) mm (undeformed)

B: nut pocket (no crack observed here)
s1 = 33.2 MPa (66% of strength), f40 / f41 (nut pocket)



xyz = (20.8, 30.8, 3.7) mm (undeformed)