From 33 % to 2.0 % off the real test: test conditions, then post-training
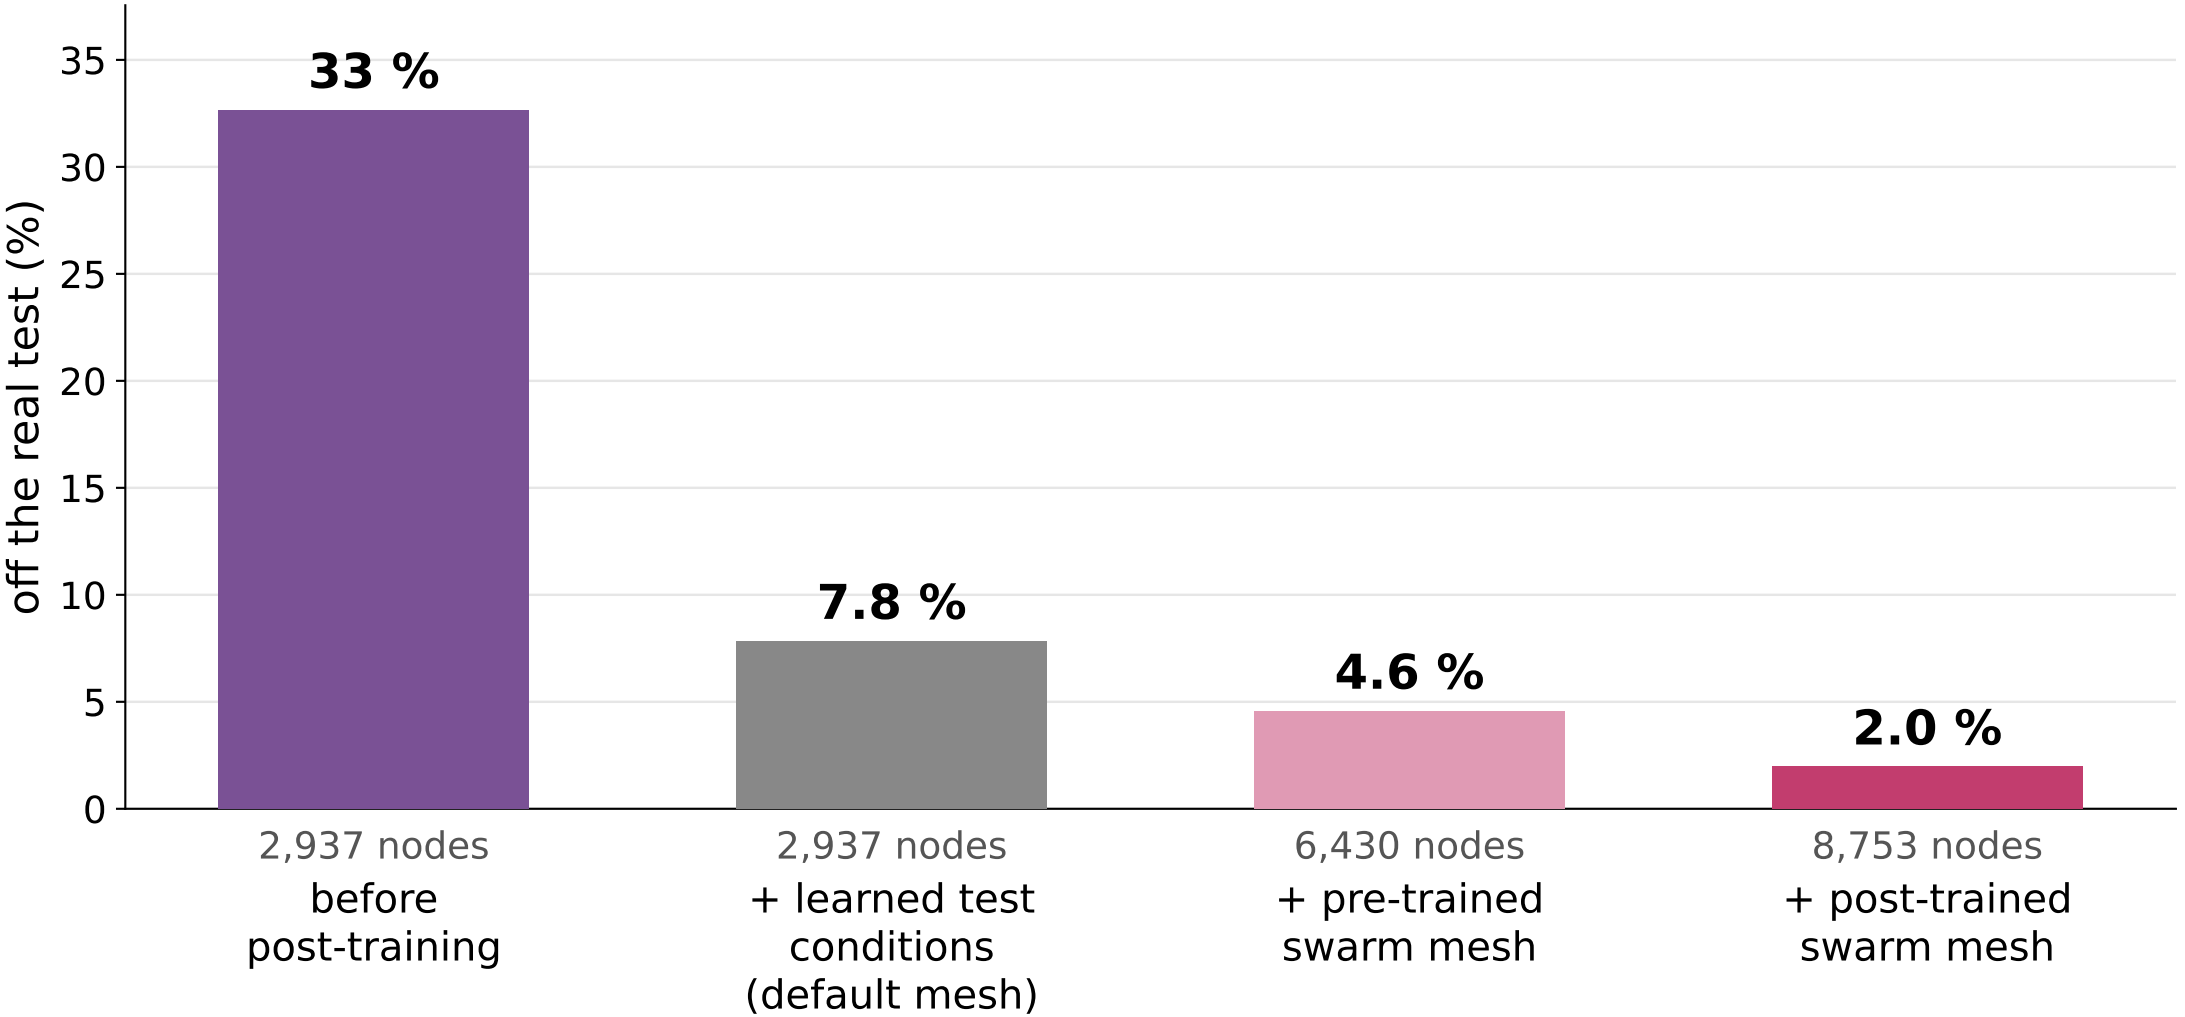
same solver and material throughout; learned test conditions = sticking platens, seating gap and load-train compliance, frozen; then only the mesh changes