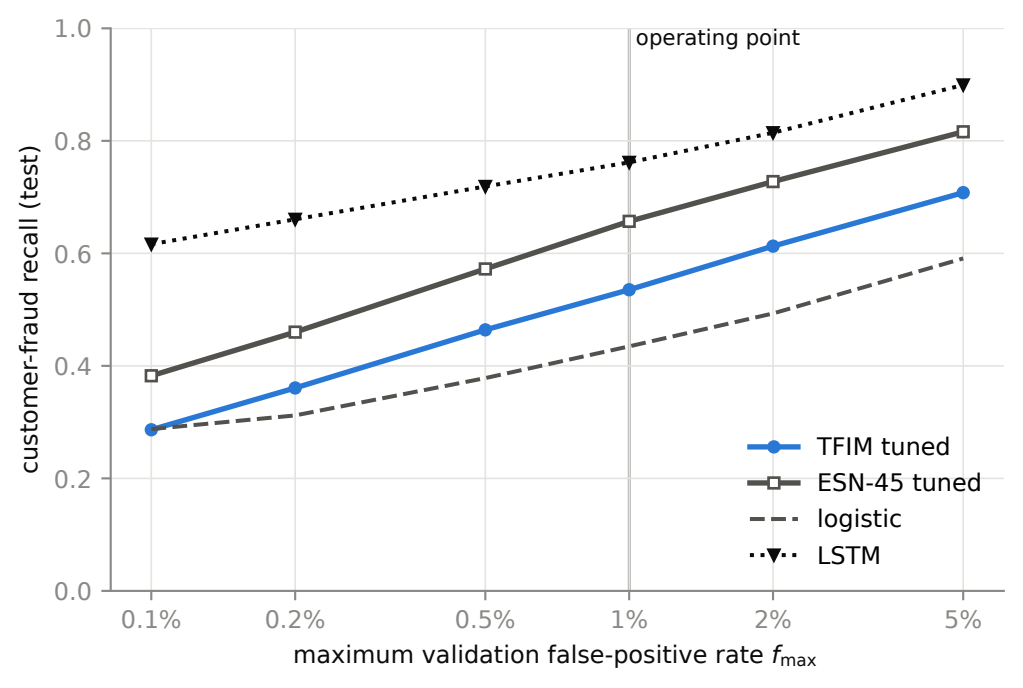
operating point
customer-fraud recall (test)
1.0
0.8
0.6
0.4
0.2
0.0
0.1%
0.2%
0.5%
1%
2%
5%
maximum validation false-positive rate f_{max}
TFIM tuned
ESN-45 tuned
logistic
LSTM