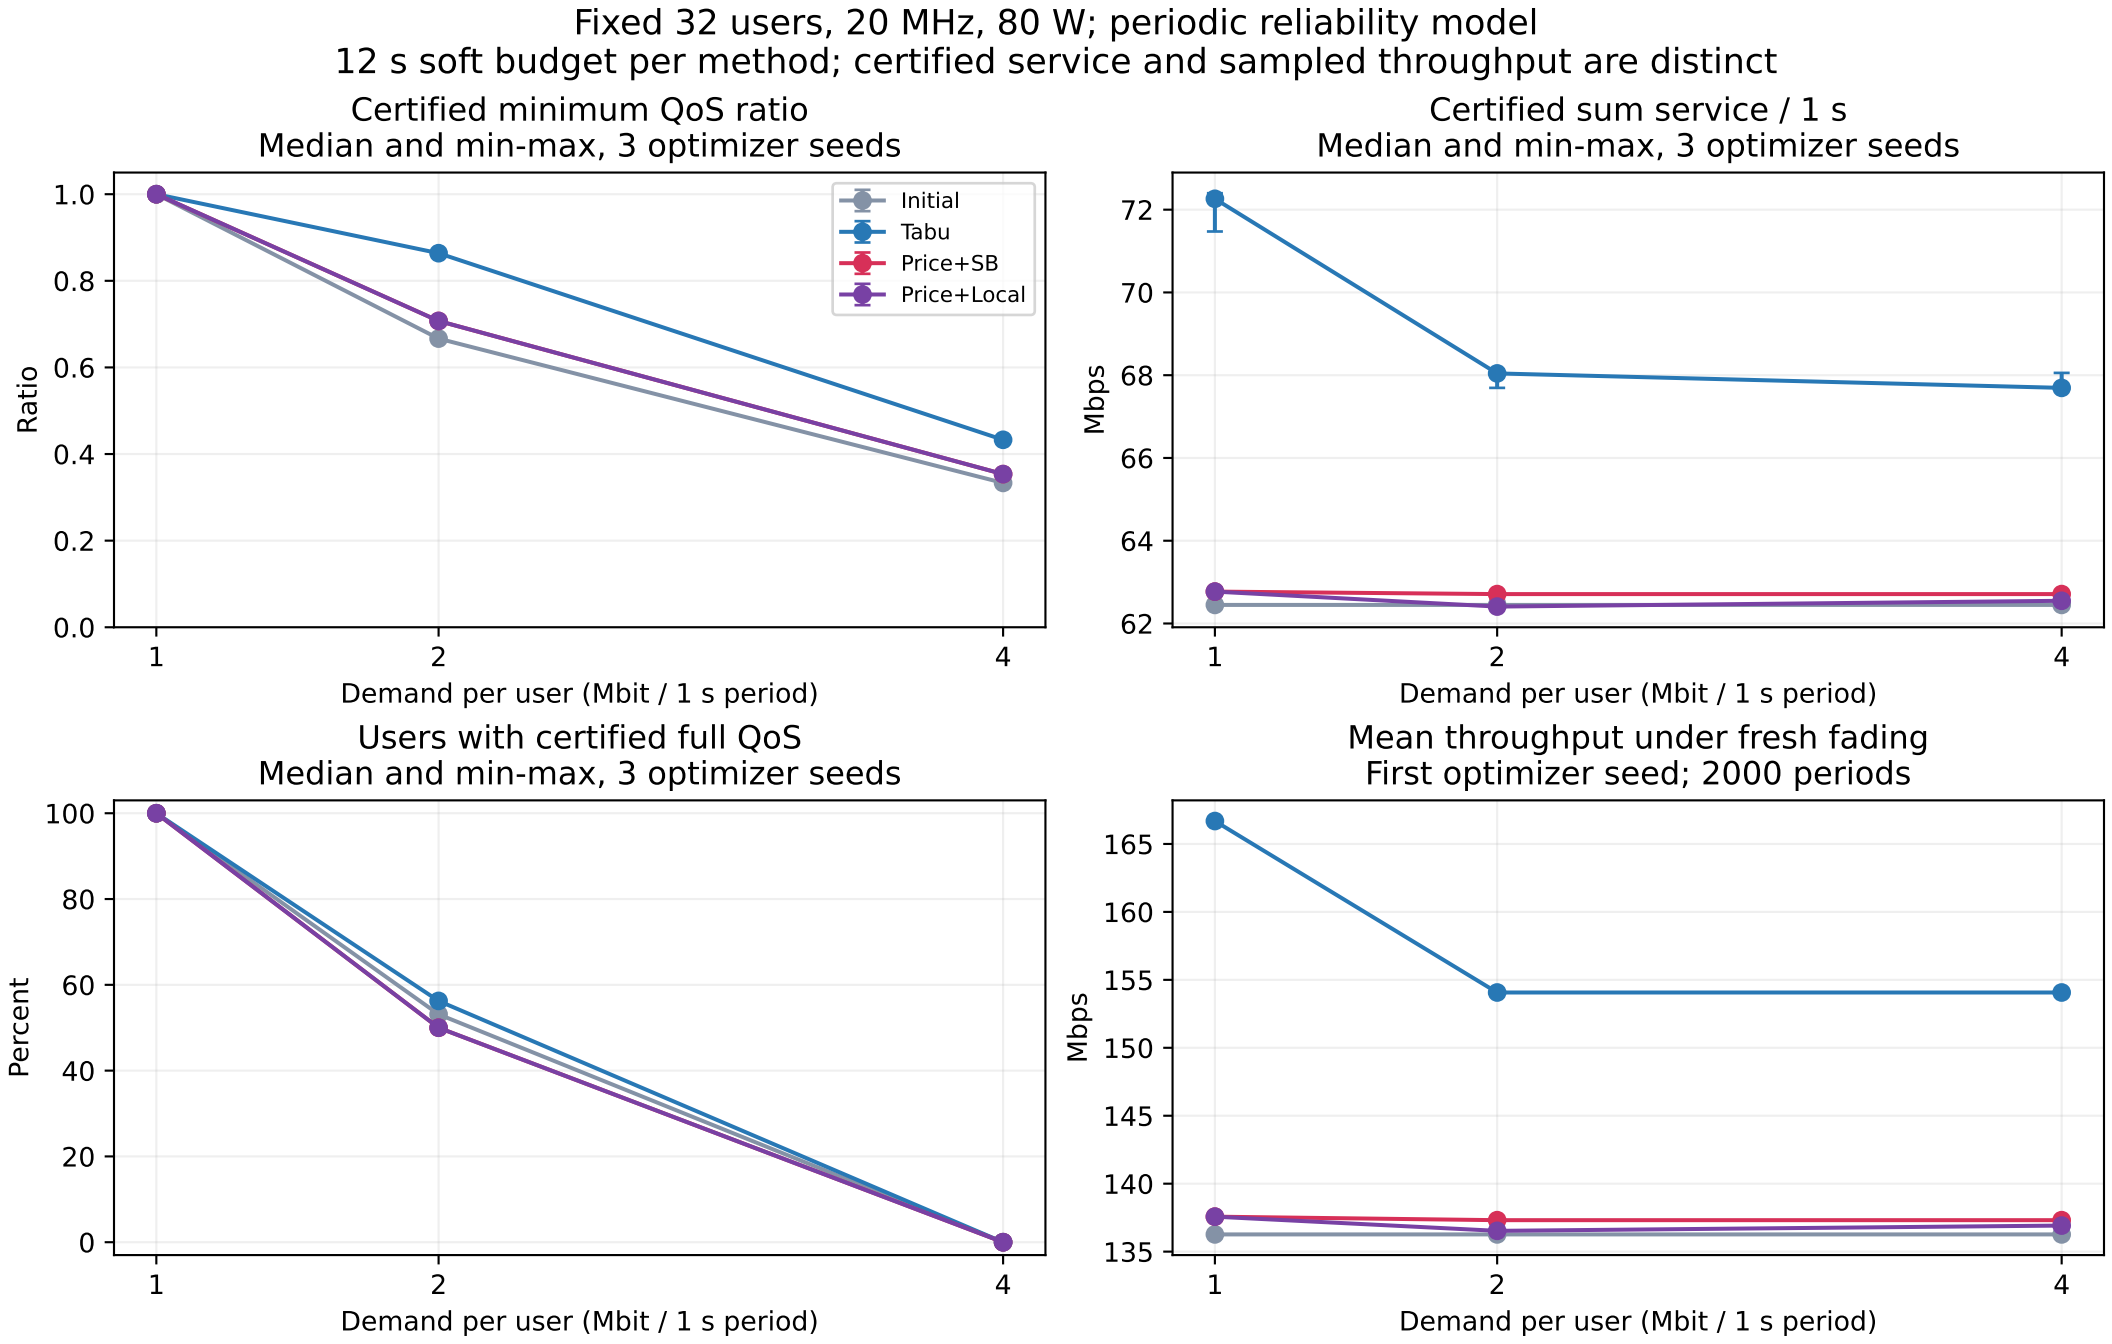
Fixed 32 users, 20 MHz, 80 W; periodic reliability model
12 s soft budget per method; certified service and sampled throughput are distinct
Certified minimum QoS ratio
Median and min-max, 3 optimizer seeds
Ratio
Demand per user (Mbit / 1 s period)
Initial
Tabu
Price+SB
Price+Local
Certified sum service / 1 s
Median and min-max, 3 optimizer seeds
Mbps
Demand per user (Mbit / 1 s period)
Users with certified full QoS
Median and min-max, 3 optimizer seeds
Percent
Demand per user (Mbit / 1 s period)
Mean throughput under fresh fading
First optimizer seed; 2000 periods
Mbps
Demand per user (Mbit / 1 s period)