

Orbital sander housing

Written by Trace from 71 changes in 16 sessions
22 Sep 2026

REV	DATE	DESCRIPTION
A	14 Aug 2026	First release
B	22 Sep 2026	Wall, fillet, material, seat

1 Overview

The upper housing of a random orbital sander, molded in one piece around a 125 mm pad. The motor stands on a wall inside the housing, in a 608 bearing held by a boss under the wall; the palm grip closes the top, and the dust port leaves the skirt at the back.

HEIGHT	RIM	WALL	MATERIAL
124	Ø124	2.5 nominal	PC-ABS B

2 Changes since Rev A

NO.	CHANGE	WAS	NOW	SOURCE
2.1	Motor mount wall	2.0	2.5	↳ 09:12 Sketch 4
2.2	Root fillet	R1.5	R2	↳ 09:31 Fillet 7
2.3	Housing material	ABS	PC-ABS	↳ 10:20 Housing
2.4	Bearing seat	Ø21.8	Ø22 H7	↳ 10:24, 10:26

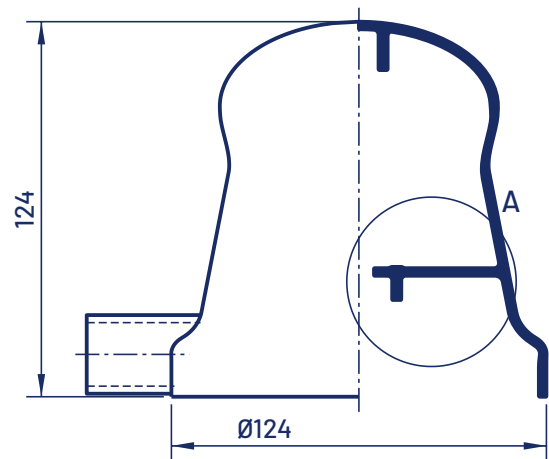


FIG. 1 HALF SECTION · 1:2.5

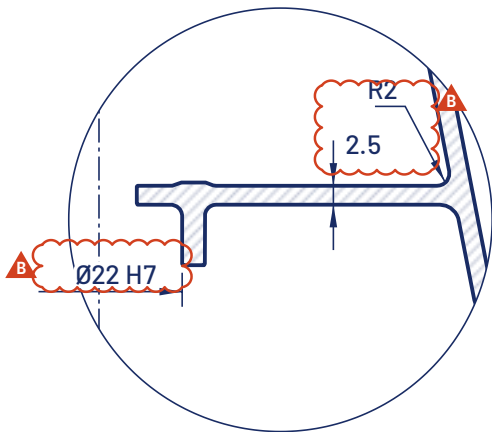


FIG. 2 DETAIL A · 1:1

WRITTEN	CHECKED	APPROVED
Trace	Waiting for review	-
22 Sep 2026	-	-