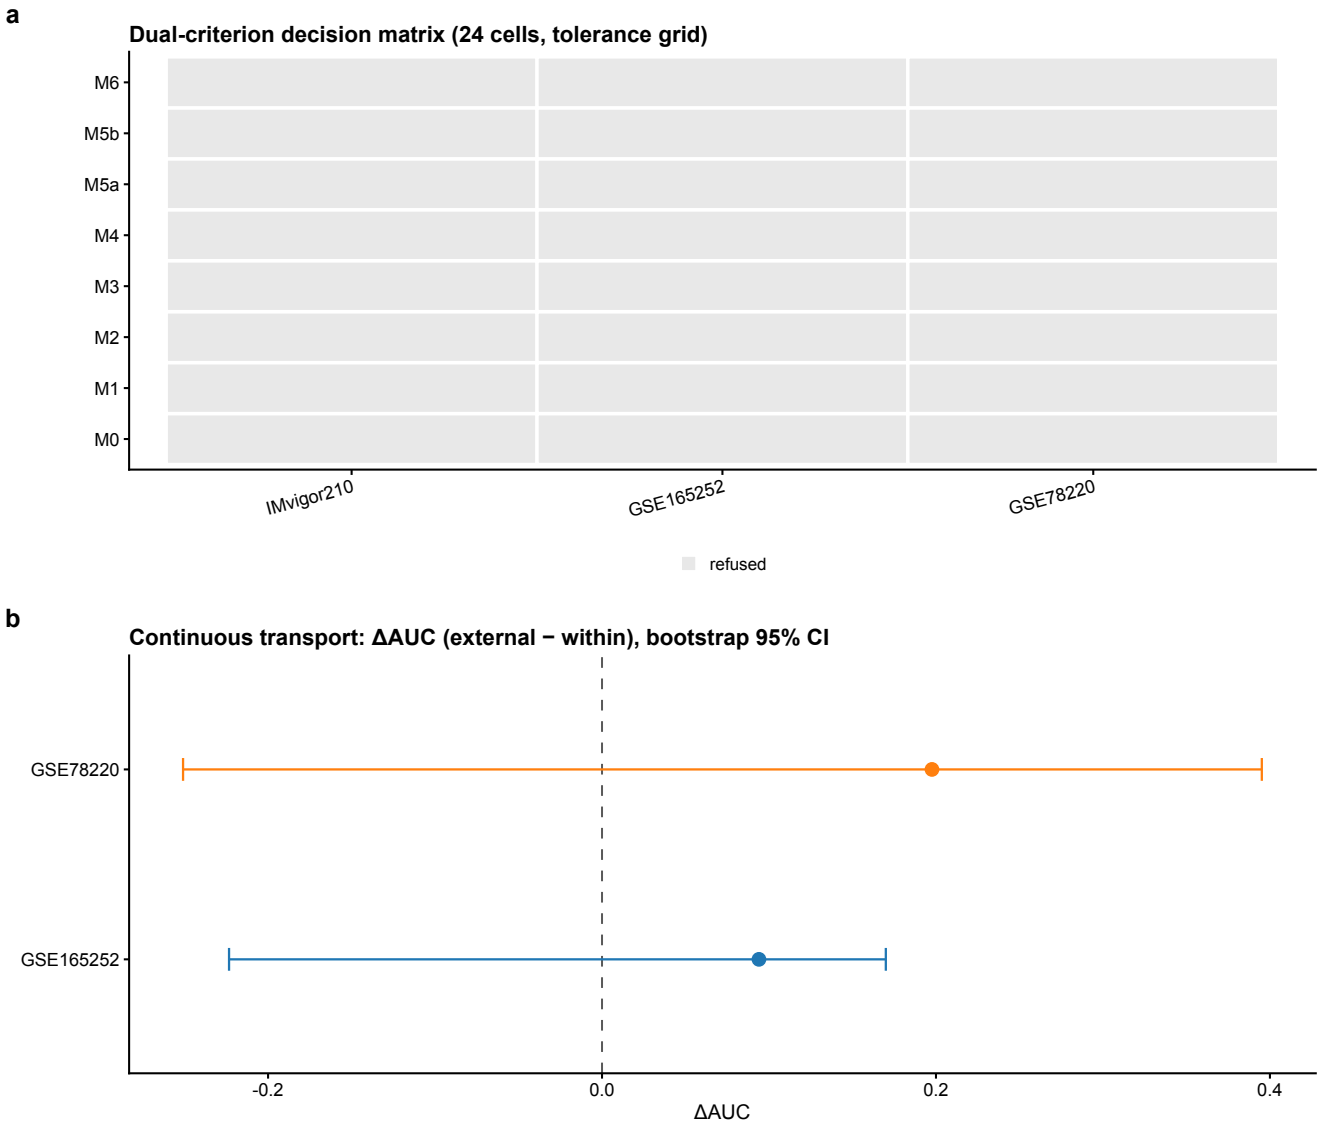
a
Dual-criterion decision matrix (24 cells, tolerance grid)
M6
M5b
M5a
M4
M3
M2
M1
M0
IMvigor210
GSE165252
GSE78220
refused
b
Continuous transport: ΔAUC (external − within), bootstrap 95% CI
GSE78220
GSE165252
-0.2
0.0
0.2
0.4
ΔAUC