






Add I2C Breakout Headers

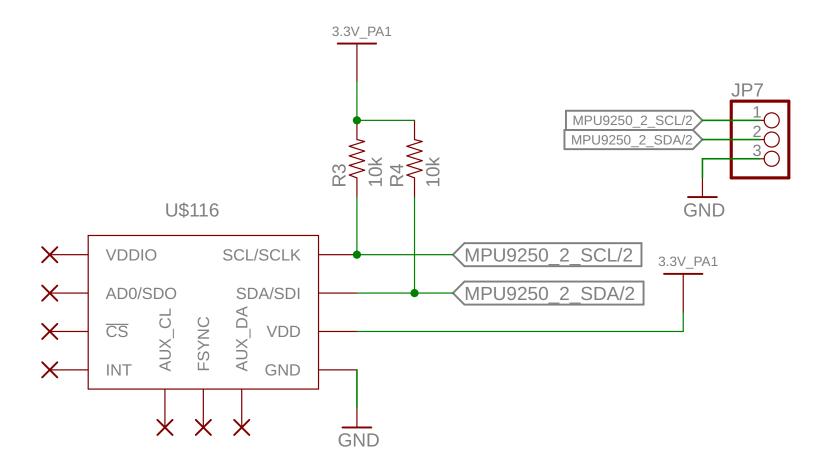


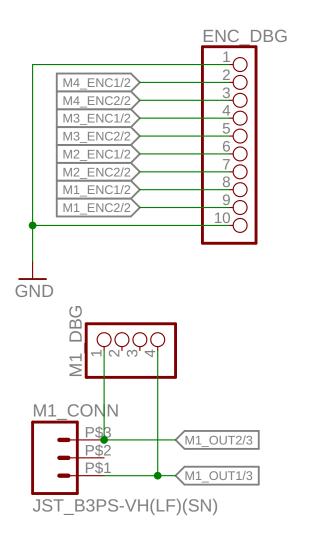

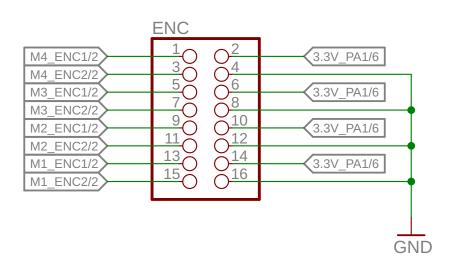







JP6	
GND/5	1
DEBUG4/2	$\frac{2}{2}$
DEBUG3/2	3 <u>0</u>
DEBUG2/2	4 0
DEBUG1/2	5 0
GND/5	30

	JP5
US3 ECHO 3.3V/2	1
US3_TRIG_3.3V/2	$\frac{2}{2}$
US2_ECHO_3.3V/2	<u>3</u> O
US2_TRIG_3.3V/2	50
US1_ECHO_3.3V/2	6
001_11110_0.0112	\Box

