


Dehnker

D2


10mm 直动式电磁阀

紧凑的设计
高流量与宽度比


Compact design
High flow to width ratio

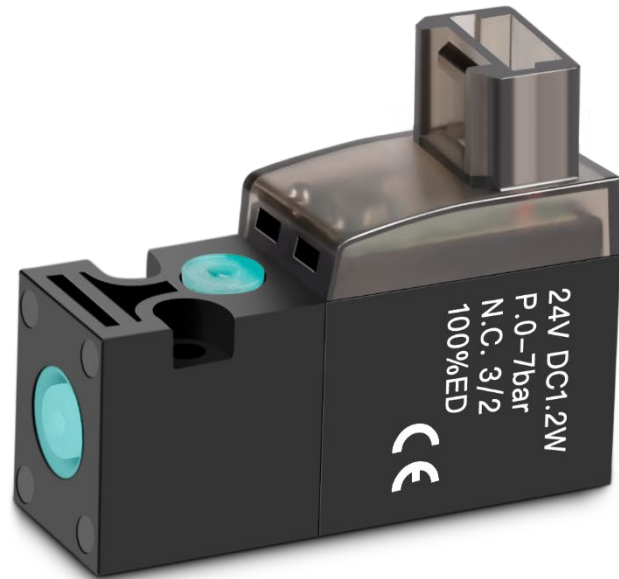


2/2 NC



3/2 NC





3/2 NO


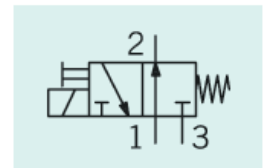


阀体由具有高机械强度、耐高温、耐化学性和耐磨性的热塑性树脂制成。线圈与阀体呈可拆卸结构连接，便于以后更换。德恩科产品坚固、可靠、性能一致性和稳定性，在市场上具有很强的竞争力。



The valve body is made of thermoplastic resin with high mechanical strength, high temperature resistance, chemical resistance and wear resistance. The coil is connected with the valve body in a detachable structure for easy replacement in the future. DEENCO products are firm, reliable, consistent and stable in performance, and have strong competitiveness in the market.

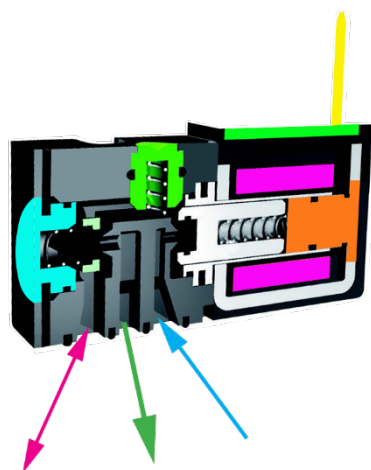

3/2.N.C.
(常闭触点)
(Normally closed)

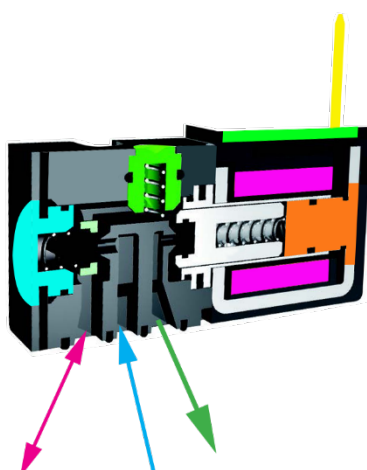

3/2.N.O.
(常开触点)
(Normally open)

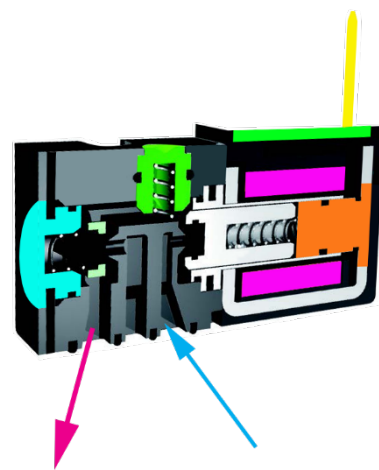


2/2.N.C.
(常闭触点)
(Normally closed)

技术参数

10mm


	标准型	大流量
工作压力[bar]	0-7 bar	0-7 bar
公称通径Ø[mm]	0.7	1.1
标准流量[NL/min] (6bar)	12(1-2)	34(1-2)
响应时间[msec]	8(ON) 10(OFF)	10(ON) 10(OFF)
额定电压[v]	12 / 24 VDC	12 / 24 VDC
额定功率[W]	1.2W	1.2W
电压容差	±10%	±10%
电气绝缘	1000VAC	1000VAC
线圈绝缘等级	F (155°C)	F (155°C)
流体/环境温度	-10°C~50°C	-10°C~50°C
最大工作频率[Hz]	30	30
占空比	100% ED	100% ED
预期寿命	>5000万次循环	>5000万次循环
固定	2个M1.7螺钉	2个M1.7螺钉
重量[g]	12	12
耐冲击/耐振动[m/s²]	150/30	150/30
防护等级	IP51	IP51

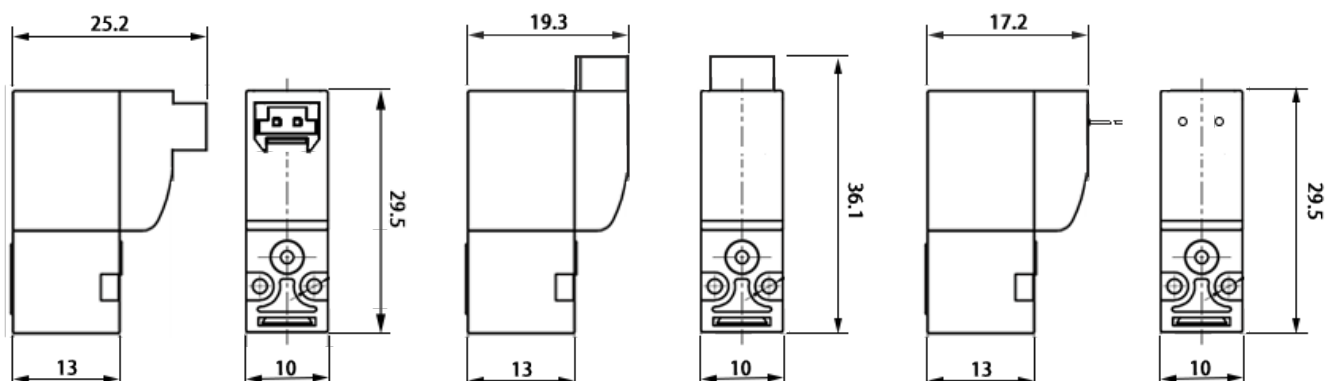

90° 插线型


平行插线型

引线型

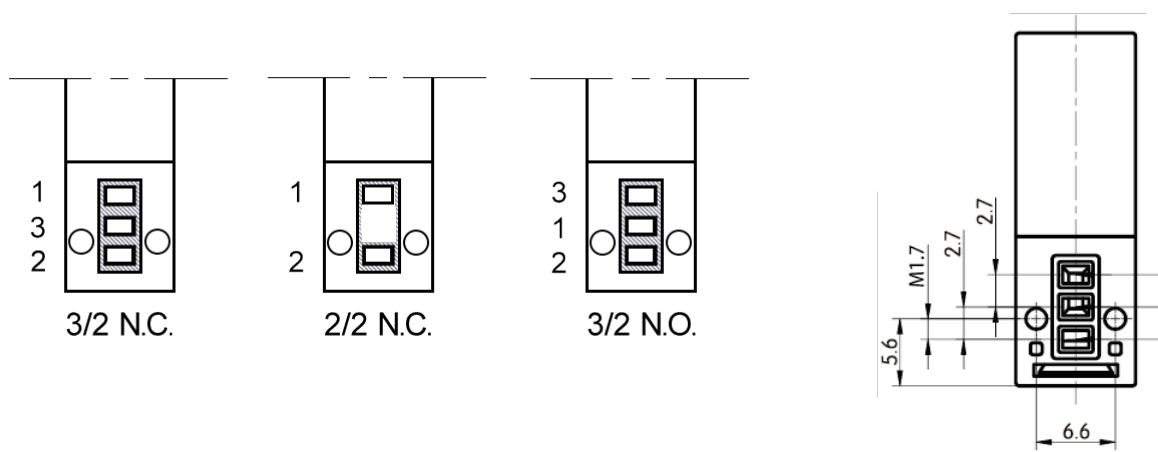

1	2	3
IN	OUT	EXH

底部尺寸

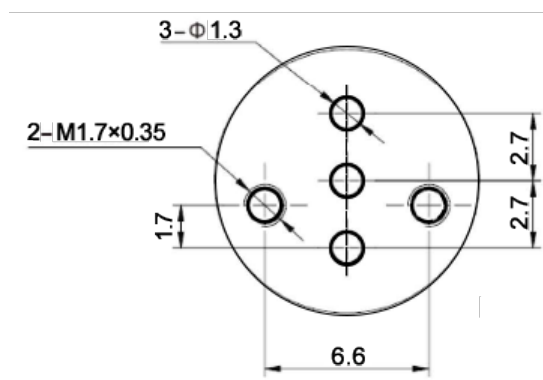

孔位安装图



※所有带节电回路的类型，都带指示灯·过电压保护回路。

※90°插线 L 型，平行插线型，引线型请参照产品尺寸图。


※引线款导线常规长度 300mm,可定制长度。

可根据要求定制

- 电压 (V)
- 功率 (W)
- 电气连接口
- 防护等级 (适用于IP67的封装物)
- 压力 (高于 13 帕)

Customizations available on request

- Voltages (Volt)
- Powers (Watt)
- Electrical co
- IP protection(Potting compound for applications IP 67)
- Pressures (up to 13bar)

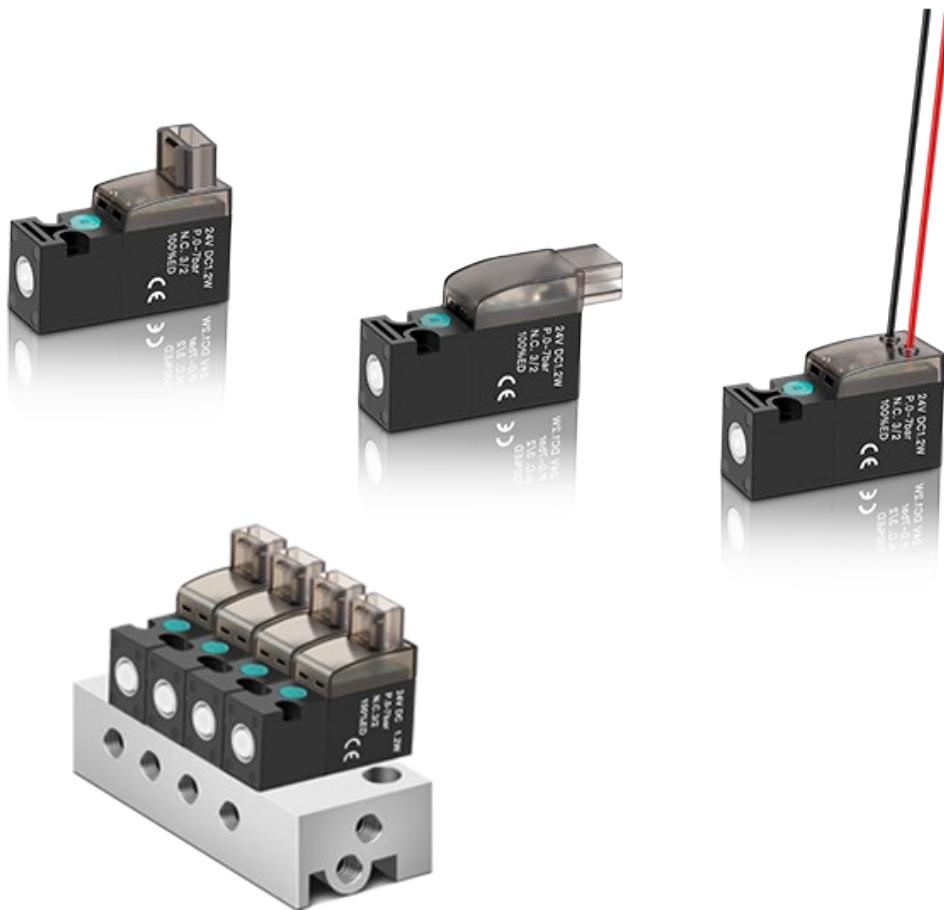

DEHNER

Micro precision fluid control

SERIES D2 SOLENOID VALVES