



Manual



Index

Introduction	1
Aknowledgements	1
Ports and Connectors	2
Description	3
RJ-45 Video Out	3
Initial Setup	4
SD card formatting	4
Windows	5
MacOS	6
Linux	8
Keyboard	9
PS/2 Keyboard	9
Spanish	9
English	9
Spectrum	9
Special keys and buttons	10
esxdos	11
BIOS	13
Main	14
ROMs	15
Upgrade	15
Boot	16
Advanced	17
Exit	18
ZX Spectrum	19
ROMs	20
DerbyPro	20
CargandoLeches	21
POKES	21
Preparing ultrafast loading tapes	22
SE Basic IV	23
Other ROMs	24
SD advanced format (+3e)	25
Windows	25
MacOS	25
Linux	27
+3e	30
esxdos	31

Basic Guide	31
ZXUNO+ Commands	33
Making RDM (RaDastan Movie) files	34
CP/M	35
FUZIX	36
How to Build	36
How to use	37
Upgrade	41
BIOS	41
ROMs	41
Cores	42
esxdos	42
Flash Memory	43
Other cores	44
ZX Spectrum EXP27	44
SD card format	44
Keyboard	45
Special keys and buttons	45
ZX Spectrum 48K (Kyp)	46
SD card format	46
Keyboard	46
Special keys and buttons	46
ZX Spectrum 128K (Kyp)	47
SD card format	47
Keyboard	47
Special keys and buttons	47
ZX Spectrum (Kyp/azesmbog)	48
SD card format	48
Keyboard	48
Special keys and buttons	48
ZX Spectrum TBBBlue	49
SD card format	49
Keyboard	50
Special keys and buttons	50
Basic Guide	50
Acorn Atom	52
SD card format	52
Keyboard	53
Special keys and buttons	53
Basic Guide	54
Acorn Electron	55

SD card format	55
Keyboard	55
Special keys and buttons	55
Basic Guide	56
Amstrad CPC 464	58
SD card format	58
Keyboard	58
Special keys and buttons	58
Basic Guide	58
Amstrad CPC 6128	60
SD card format	60
Keyboard	60
Special keys and buttons	60
Basic Guide	61
Apple I	62
SD card format	62
Keyboard	62
Basic Guide	62
Apple II	64
SD card formatting	64
Windows	64
MacOS and Linux	64
Keyboard	65
Special keys and buttons	65
Arcades	66
Keyboard	66
Special keys and buttons	66
Atari 800XL	67
SD card	67
Keyboard	67
Special keys and buttons	67
Basic Guide	68
Atari 2600	69
SD card format	69
Keyboard	69
Special keys and buttons	69
Basic Guide	70
BBC Micro	71
SD card format	71
Keyboard	72
Special keys and buttons	72

Basic guide	73
Computers Lynx	75
SD card format	75
Keyboard	75
Special keys and buttons	75
Basic Guide	76
CHIP-8	77
SD card format	77
Keyboard	77
Special keys and buttons	77
Basic Guide	78
Colecovision	79
SD card format	79
Keyboard	79
Special keys and buttons	79
Basic Guide	80
Colour Genie	81
SD card format	81
Keyboard	81
Special keys and buttons	81
Basic Guide	82
Commodore 16	84
SD card format	85
Windows	85
MacOS and Linux	85
Keyboard	86
Special keys and buttons	86
Basic Guide	87
Commodore 64	88
SD card format	89
Windows	89
MacOS and Linux	89
Keyboard	90
Special keys and buttons	90
Basic Guide	91
Commodore PET	92
SD card format	92
Keyboard	92
Special keys and buttons	92
Basic Guide	93
Commodore VIC-20	94

SD card format	94
Keyboard	94
Special keys and buttons	94
Basic Guide	95
Flappy Bird	96
SD card format	96
Keyboard	96
Special keys and buttons	96
Galaksija	97
SD card format	97
Keyboard	98
Special keys and buttons	98
Basic guide	99
HT-1080Z	100
SD card format	100
Keyboard	101
Special keys and buttons	101
Basic Guide	102
Jupiter ACE	104
SD card format	104
Keyboard	104
Special keys and buttons	104
Basic Guide	105
MSX	106
SD card format	106
Keyboard	107
Special keys and buttons	107
Basic Guide	108
MSXCTRL	109
Other	109
MZ-700	110
SD card format	110
Keyboard	111
Special keys and buttons	111
Basic Guide	111
NES	113
SD card format	113
Keyboard	113
Special keys and buttons	113
Basic Guide	114
Oric Atmos	115

SD card format	115
Windows	115
MacOS and Linux	115
Keyboard	116
Special keys and buttons	116
Basic Guide	117
Oric Atmos (Kyp)	118
SD format	118
Keyboard	118
Special keys and buttons	119
Basic Guide	120
Pong	121
SD format	121
Keyboard	121
Special keys and buttons	121
Basic Guide	122
PC XT	123
SD card format	123
SAM Coupé	124
SD card format	124
Keyboard	124
Special keys and buttons	124
Basic Guide	125
Sega Master System	126
SD card format	126
Keyboard	126
Special keys and buttons	126
Basic Guide	127
SmartROM	128
SD card format	128
Vectrex	129
SD card format	129
Keyboard	129
Special keys and buttons	129
Basic guide	130
Videopac	131
SD card format	131
Keyboard	131
Special keys and buttons	131
Basic Guide	132
Change VDC ROM charset	133

ZX81	134
SD card format	134
Keyboard	134
Basic Guide	134
Other Hardware	135
Rotary Encoders	135
Connection	135
Pong Core Configuration	136
Loading from tape	137
Cassette Player	137
Computer	137
PlayTZX	137
Mobile phone, tablet, MP3 player, etc.	138
Audio file conversion	139
Miniduino	140
Ports and buttons	140
Configuration	141
Use	142
Making TZX or TSX files from other formats	143
Maxduino firmware upgrade	144
Troubleshooting	150
Firmware images management	150
zx123_tool	150
Firmware recovery	154
JTAG cable connections	154
Recovery using a Raspberry Pi	155
References	160

Introduction

ZXUNO+ is the latest iteration of [ZX-Uno](#) a hardware and software project based on an FPGA board programmed to work like a ZX Spectrum computer, and created by the ZX-Uno team: Superfo, AVillena, McLeod, Quest and Hark0.

Over time, the project has been growing, and now it is possible to install different configurations (cores) in the flash memory of the FPGA, which work like different systems than the ZX Spectrum, and you can choose to start the ZXUNO+ with the desired configuration among all those installed.

ZXUNO+ official web page is <https://zxuno.speccy.org>.

Acknowledgements




Most of the content is based on information previously shared:

- At [ZX-Uno forum](#)
- At [foroFPGA](#)
- Several existing FAQ, mostly the original version [by @uto_dev](#), and the latest one [by @desUBIKado](#)
- At [ZX-Uno Telegram Channel](#)

A very special thanks to desUBIKado for the continuous and thorough work finding and sharing information about all the available cores and their functionalities.

Without the previous work of all of these people (and more), this manual wouldn't exist.

Ports and Connectors

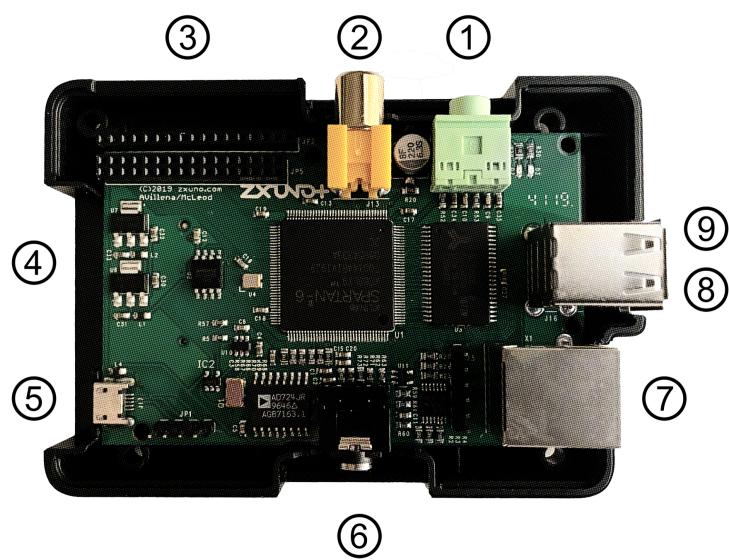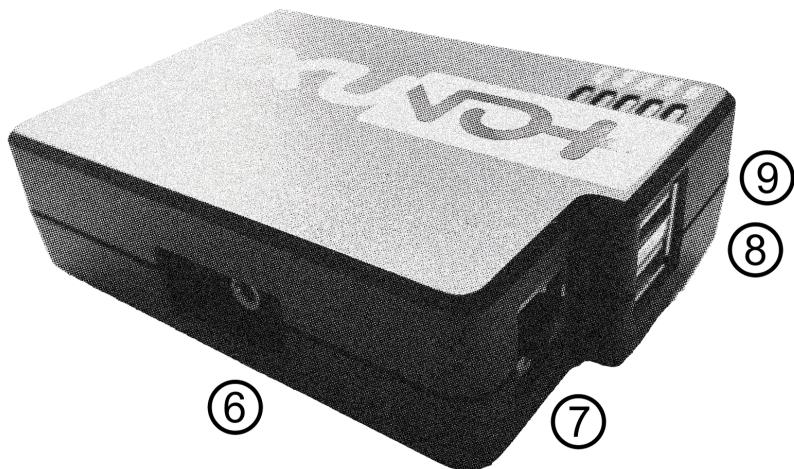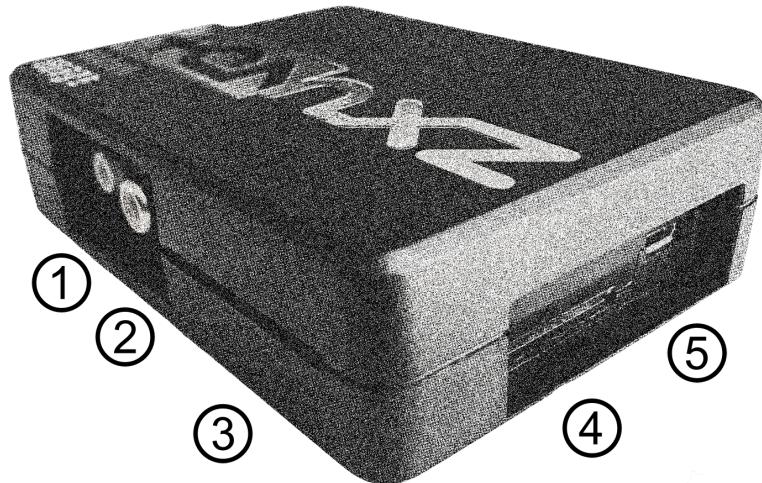


Description


1	Audio Out
2	Video Out
3	Expansion Port
4	SD Card Slot
5	Power (USB Mini-A)
6	Audio In
7	Video Out (RJ-45)
8	Mouse USB (PS/2) Port
9	Keyboard USB (PS/2) Port

RJ-45 Video Out

This is the pinout or RJ-45 connector to use as VGA output:



This are the pin numbers for RJ-45 connector to use as RGB out with a SCART connector:

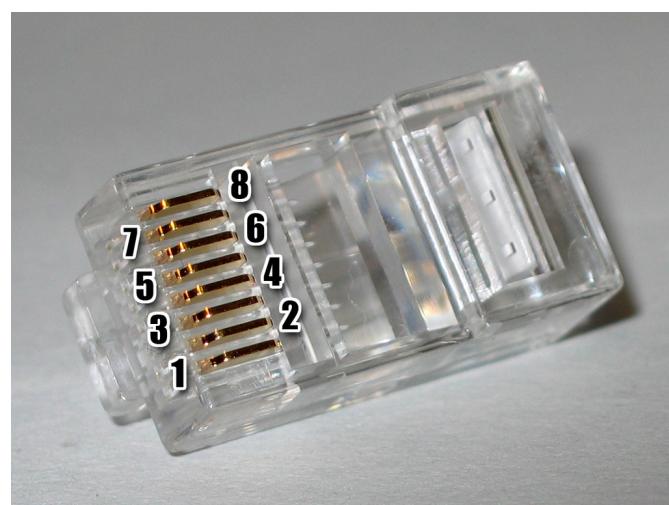

Initial Setup

In order to be able to set up and use a ZXUNO+ you need, at least, the following:

- A USB charger or a TV or other device that offers USB power. Usually 500 mA is more than enough
- VGA cable and monitor
- PS/2 keyboard (with USB to PS/2 adapter or connector)

In order to take advantage of its full potential, you may also have:

- A SD card, not necessarily very large
- PC speakers to connect to the audio output, or a stereo jack converter to two red/white RCA connectors to connect to the TV
- A PS/2 mouse (USB to PS/2 adapter needed)
- An audio cable with a stereo 3.5 mm jack on one side, and both audio channels split into two mono outputs on the other side, if you want to use an audio player and/or recorder, like, for example, a Miniduino ([see more info later](#)), a PC/Mac/Raspberry PI, etc. or a [cassette tape](#) recorder/player. The right sound channel is used as input (EAR) and the left channel can be used as output (MIC).

SD card formatting

In order to use a SD card, it has to be formatted with, at least, one FAT16 or FAT32 format (depending on the case, one or the other format is recommended for compatibility with different third-party cores). It must be the first partition if there are more than one, except for the Spectrum core which can have [the first partition in +3DOS format, and then the second one in FAT16 or FAT32 format](#) to use with a +3e ROM.



FAT16 partitions have a maximum size of 4GB



When naming a partition which will be used with esxdos, it's important not to use the same of any directory inside, or an access error will happen when trying to see the contents (e.g. do not name the partition as **BIN**, **SYS** or **TMP**).

Windows

For simple configurations, and cards of the correct size (less than 2GB for FAT16 or less than 32GB for FAT32), you can use [the official formatting tool of the SD Association](#).

For other, more complex, configurations, and depending on operating system version, you may use the command line tool `diskpart` or Windows Disk Management GUI.

For example, on Windows, to format a card with just one FAT16 partition (if the SD card is 4GB or less in size), shown as disk 6 when running `list disk` from `diskpart`:

```
select disk 6
clean
create part primary
active
format FS=FAT label=ZXUNOPLUS
exit
```

To create two 4GB FAT16 partitions (for example, to use with the MSX core) y and the rest of the space as FAT32 (for cards of more than 8GB in size):

```
select disk 6
clean
create part primary size=4000
set id = 06
active
format fs=FAT label=ZXUNOPLUS quick
create part primary size=4000
format fs=FAT label=EXTRA quick
create part primary
format fs=FAT32 label=DATA quick
exit
```

To create a 4GB FAT32 partition (for example to use with the Amstrad CPC 6128 core) and then the rest of the space with another one in FAT32 (for cards of more than 4GB):

```
select disk 6
clean
create part primary size=4000
set id = 0b
active
format fs=FAT32 label=ZXUNOPLUS unit=4k quick
create part primary
format fs=FAT32 label=EXTRA quick
exit
```

MacOS

For simple configurations, and cards of the correct size (less than 2GB for FAT16 or less than 32GB for FAT32), you can use [the official formatting tool of the SD Association](#) or Disk Utility, which is included with the operating system.

In other case, you should use the command line.

For example, to format a card, shown as `disk6`, with only one FAT16 partition (if the card size is less than 2GB):

```
diskutil unmountDisk /dev/disk6
diskutil partitionDisk /dev/disk6 MBR "MS-DOS FAT16" ZXUNOPLUS R
```

To split it into two FAT16 partitions of the same size (if the card size is 4GB or less):

```
diskutil unmountDisk /dev/disk6
diskutil partitionDisk /dev/disk6 MBR "MS-DOS FAT16" ZXUNOPLUS 50% "MS-DOS FAT16"
EXTRA 50%
```

To create two FAT 16 partitions (e.g. to use MSX core) and have the rest of space as another FAT32 partition (for cards more than 8GB in size):

```
diskutil unmountDisk /dev/disk6
diskutil partitionDisk /dev/disk6 MBR %DOS_FAT_16% ZXUNOPLUS 4G %DOS_FAT_16% EXTRA 4G
"MS-DOS FAT32" DATA R
sudo newfs_msdos -F 16 -v ZXUNOPLUS -c 128 /dev/rdisk6s1
sudo newfs_msdos -F 16 -v EXTRA -b 4096 -c 128 /dev/rdisk6s2
```



`diskutil` cannot create FAT16 partitions which are bigger than 2G and also format them. That's why, in this example, after only creating the partitions, we have to format them.

To create one FAT32 4GB partition (e.g. to use with Amstrad CPC 6128 core), and then have the rest of space available as a second FAT32 partition (for cards of more than 4GB):

```
diskutil unmountDisk /dev/disk6
diskutil partitionDisk /dev/disk6 MBR "MS-DOS FAT32" ZXUNOPLUS 4G "MS-DOS FAT32" EXTRA
R
```

In this example, since the partition has a size of exactly 4G, MacOS will use a cluster size of 4096, which is the one needed for the Amstrad CPC 6128 core. For a smaller size, you may have to format again the first partition with some commands like these:



```
diskutil unmountDisk /dev/disk6
newfs_msdos -F 32 -v ZXUNOPLUS -b 4096 /dev/rdisk6s1
```

The Spotlight feature in MacOS creates hidden files to search the items on the SD card, creating a number of hidden files. You can disable the indexing with these commands (assuming that the SD partition is named **ZXUNOPLUS**):



```
mdutil -i off /Volumes/ZXUNOPLUS
cd /Volumes/ZXUNOPLUS
rm -rf .{,_}{{fsevents,Spotlight-V*,Trashes}
mkdir .fsevents
touch .fsevents/no_log .metadata_never_index .Trashes
cd -
```

Linux

There are a lot of tools for Linux that can format and/or partition an SD card ([fdisk](#), [parted](#), [cfdisk](#), [sfdisk](#) or [GParted](#) to name a few). It should only be taken into account that the partition scheme must always be MBR, and the first partition (the one that will be used for esxdos) must be primary partition.

For example, to format a card whin only one FAT16 partition (if de card is 4B or less in size), Por ejemplo, para formatear una tarjeta con una única partición FAT16 (si la tarjeta es de 4GB o menos de tamaño), found as [sdc](#) in the device list:

```
sudo fdisk --compatibility=dos /dev/sdc
```

```
(...)
Command (m for help): n
Partition type
  p  primary (0 primary, 0 extended, 4 free)
  e  extended (container for logical partitions)
Select (default p): p
Partition number (1-4, default 1): 1
First sector (62-31116288, default 62):
Last sector, +/-sectors or +/-size{K,M,G,T,P} (128-31116288, default 31116288):
Created a new partition 1 of type 'Linux'
```

```
Command (m for help): t
Selected partition 1
Hex code (type L to list all codes): 6
Changed type of partition 'Linux' to 'FAT16'.
```

```
Command (m for help): a
Partition number (1, default 1): 1
The bootable flag on partition 1 is enabled now.
```

```
Command (m for help): p
Disk /dev/sdc
Disklabel type: dos
Disk identifier
```

Device	Boot	Start	End	Sectors	Size	Id	Type
/dev/sdc1		62	31116288	31116288	984,9M	6	FAT16

Format the FAT partition (requires root privileges)

```
sudo mkfs.fat -F 16 -n ZXUNOPLUS -s 128 /dev/sdc1
```

Keyboard

PS/2 Keyboard


The keyboard map (physical keys of the keyboard assignment to the keystrokes that are presented to the different cores) is changed using the **Advanced** menu of the BIOS. There are three different maps to choose from: Spanish (default), English, and Spectrum (advanced).

You can also change it using the **keymap** utility. Inside **/bin** you have to create a directory named **keymaps** and copy inside the keyboard map files that you want to use. For example, to switch to the US map you have to write **.keymap us** from esxdos.


For the map to be preserved after a master reset, it has to be selected as **Default** in the BIOS.

For more information, see [this message in the ZX-Uno forum](#).


Spanish

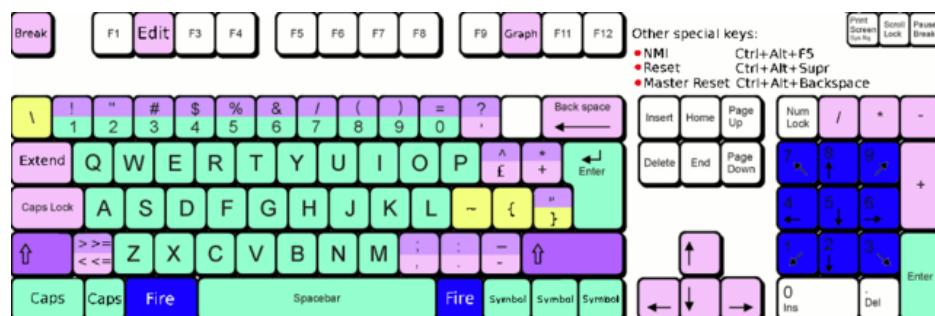

English

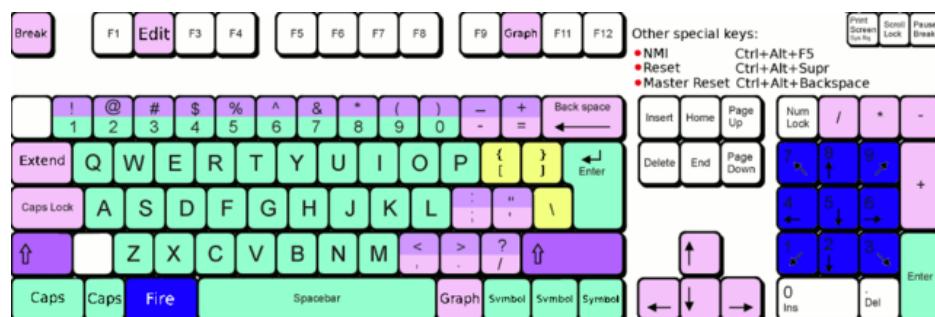

Spectrum

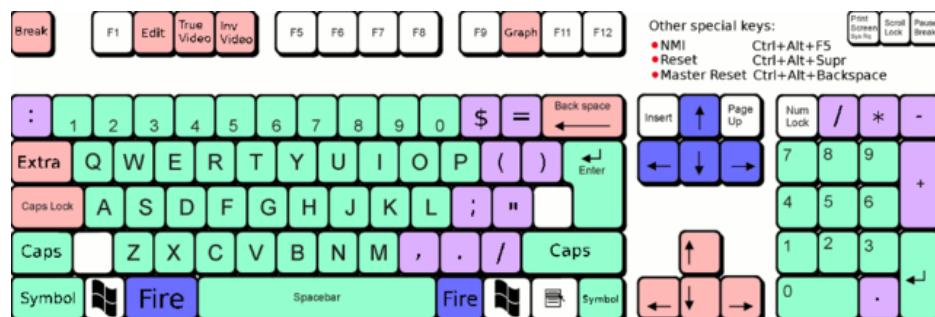

Special keys and buttons

Special keys which can be used during startup:

- **F2**: Enter BIOS setup
- **Caps Lock** or **Cursor down** or, if a joystick is connected, pressing **down**: Core selection menu
- **Esc**, or if a joystick with two or more fire buttons is connected, pressing the 2nd fire button: ZX Spectrum core ROM selection menu
- **R**: Loads the Spectrum core ROM in "real" mode, disabling esxdos, new graphics modes, etc. (pressing **Esc** afterwards allows you to choose another core)
- **/** (numeric keyboard): Load the default ZX Spectrum core ROM in "root" mode (pressing **Esc** afterwards allows you to choose another core)
- Number from **1** to **9**: Load the core in the flash location corresponding to that number

Special keys that can be used while running the main core (ZX Spectrum):

- **Esc**: BREAK
- **F2**: Edit
- **F5**: NMI
- **F7**: Play or pause when playing .PZX files
- **F8**: Rewind .PZX file to the previous mark
- **F10**: Graph
- **F12**: Turbo Boost. Speeds up CPU to 28MHz while pressed (beginning with core EXP27).
- **Ctrl+Alt+Backspace**: Hard reset. Backspace is the delete key, located in the top-right portion of the keyboard, above **Enter**.
- **Ctrl+Alt+Supr**: Soft reset.
- **Scroll Lock**: Switches between composite and VGA video modes.

esxdos

esxdos is a firmware for the DivIDE/DivMMC hardware interfaces (which ZXUNO+ implements). This allows access to storage devices such as a SD card. It includes commands similar to those of UNIX, although to use them you must precede them with a period, for example `.ls`, `.cd`, `.mv`, etc.

For it to work, it is necessary to include the corresponding files in the first partition of the SD card.

At the time of writing this document, the version included with ZXUNO+ is 0.8.6, and it can be downloaded from the official website [at this link](#).

Once downloaded and extracted, you have to copy the directories **BIN**, **SYS** and **TMP**, and all of their content, to the root of first partition of the SD card.

If everything has been done correctly, when you turn on the ZXUNO+ Spectrum core, you will see how esxdos detects the card and loads the necessary components to work.



It is also recommended to add the specific esxdos commands for ZXUNO+. These can be obtained from the project source page ([here](#), [here](#) and [here](#)), and are as follows:

```
back16m  
corebios  
dmaplayw  
esprst  
iwconfig  
joyconf  
keymap  
loadpxz  
playmid  
playrmov  
romsback  
romsupgr  
upgr16m  
zxuc  
zxunocfg
```

It is [explained later](#) what each of them does.

BIOS



Pressing the **F2** key during boot will access the BIOS setup. The BIOS firmware is the first program that runs when the ZXUNO+ is turned on. The main purpose of BIOS is to start and test the hardware and load one of the installed cores.

Using left and right cursor keys, you can navigate through the BIOS setup screens. With up and down keys you can choose the different elements of each screen and, with the **Enter** key, it is possible to activate and choose the options for each of these. The **Esc** key is used to close open option windows without applying any action.




You can also acces the BIOS if you have an adapter and a joystick connected, pressing the down direction button on startup. This accesses the list of installed cores. Choose the latest option (**Enter Setup**) to access.

Other useful keys to use on startup are:

- **Scroll Lock** or **Cursor Down**, or, if a joystick is connected, pressing the down direction button: Core Selection Menu
- **Esc** or, if a joystick with two or more buttons is connected, pressing the second fire: ZX Spectrum Core ROM selection menu
- **R**: Load the ZX Spectrum default ROM in "real" mode disabling esxdos, new graphic modes, etc. (combined with **Esc** let's you use a different ROM)
- **/** (numeric keypad): Load the ZX Spectrum default ROM in "root" mode (combined with **Esc** let's you use a different ROM)
- Number between **1** and **9**: Load the corresponding core from Flash

Main

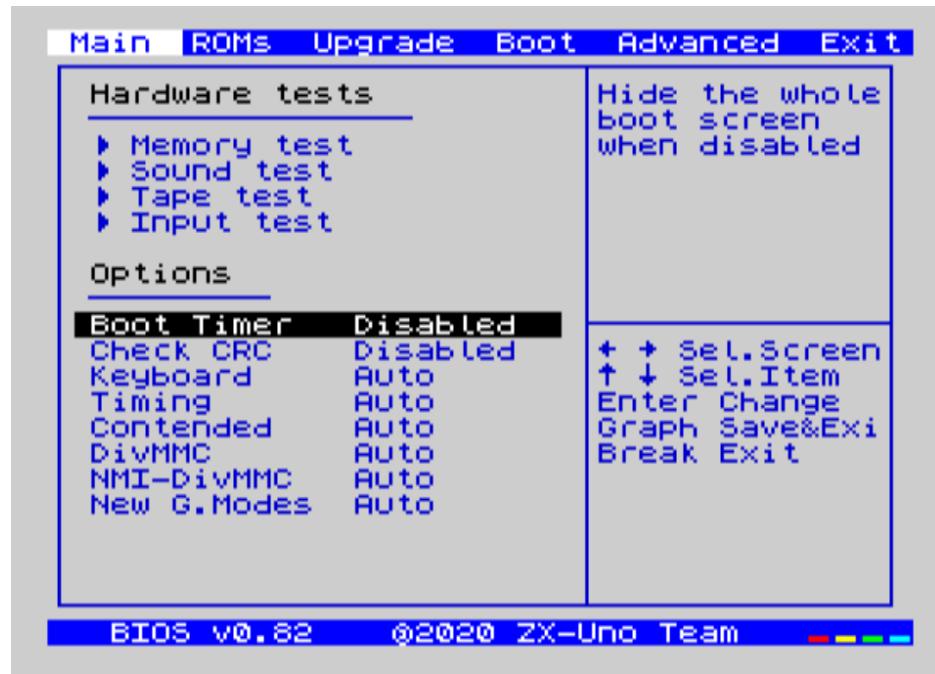


In the first configuration screen, in addition to being able to run several tests, you can define the default behavior for the following:

- Boot Timer: Sets how long the boot screen is available (or hiding it completely)
- Check CRC: Check ROM integrity when loading (more secure) or bypassing it (faster)
- Keyboard
- Timing: ULA Behaviour (48K, 128K, Pentagon Modes)
- Contended
- DivMMC
- DivMMC NMI Support
- New Graphic Modes Support (ULAPlus, Timex, Radastan)


More technical information can be found on [the ZX-Uno Wiki](#).

ROMs

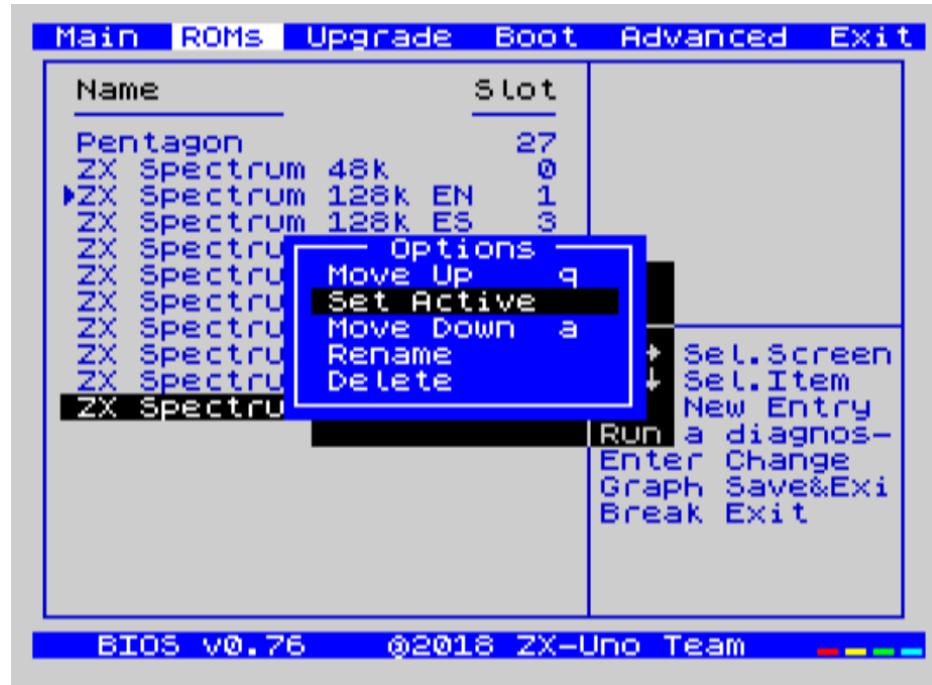


The second screen shows the installed ZX Spectrum ROMs. You can reorder (Move Up, Move Down), rename or delete each of them, as well as choose the one that will be loaded by default at startup (Set Active).

Upgrade

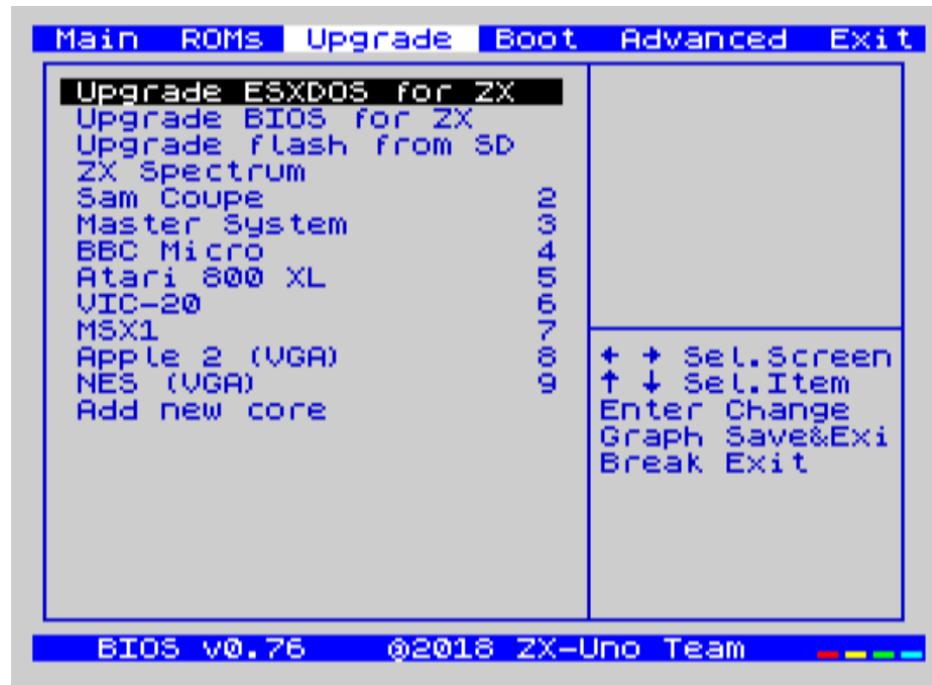


Upgrade screen is used to perform the different updates of the Flash memory content: esxdos, BIOS, Cores, etc. (see [the section corresponding to updates](#) for more information).

Boot

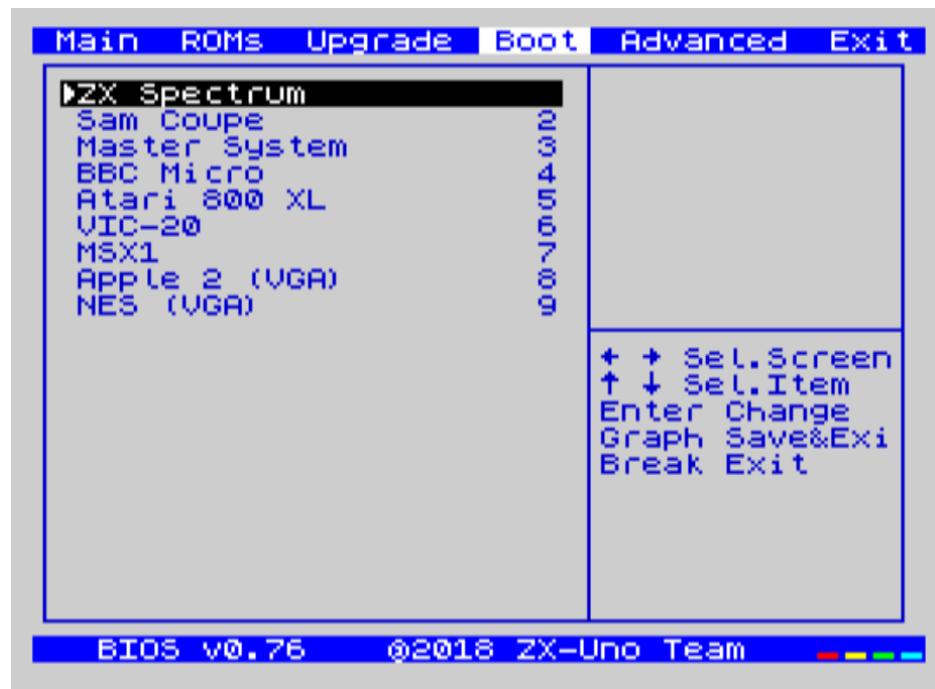

In the *Boot* screen you can choose which one of the installed cores is loaded by default at startup.


Advanced

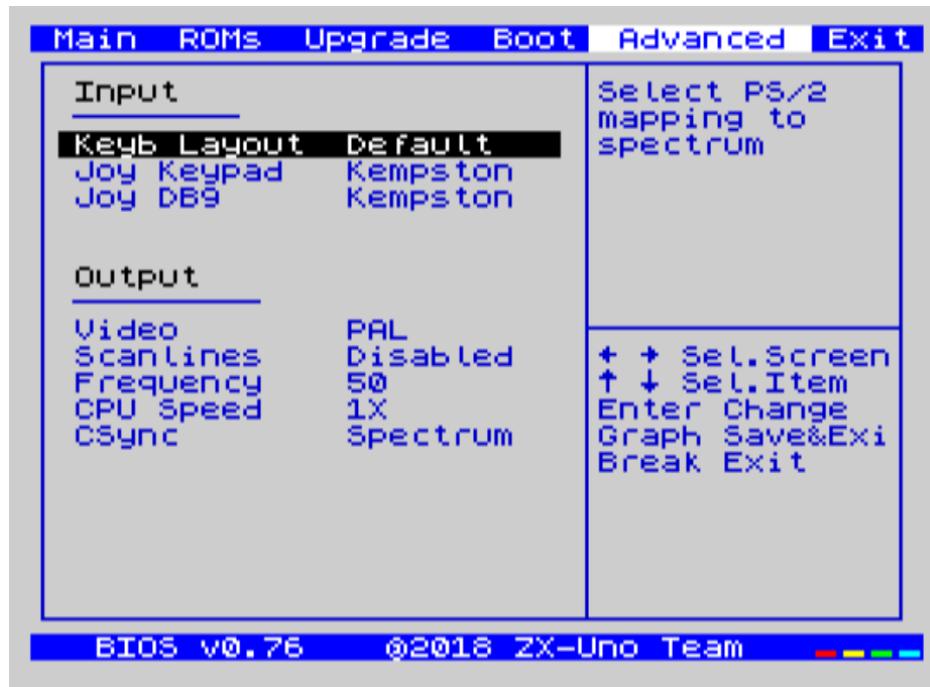

The Advanced configuration screen is used to edit the following settings:

- Keyboard layout (Keyb Layout): See [the corresponding section](#) for more information)
- Joystick behavior when emulated with the numeric keypad (Joy Keypad): Kempston, Sinclair Joystick 1, Sinclair Joystick 2, Protek or Fuller
- Behavior of a joystick connected to the port (Joy DB9): Kempston, Sinclair Joystick 1, Sinclair Joystick 2, Protek, Fuller or simulate the keys Q, `A`, 0, `P`, Space and M
- Video output: PAL, NTSC or VGA
- Scanlines simulation: Enabled or Disabled
- VGA horizontal frequency: 50, 51, etc.
- CPU speed: Normal (1x) or accelerated (2X, 3X, etc.)
- Csync: Spectrum or PAL

Exit

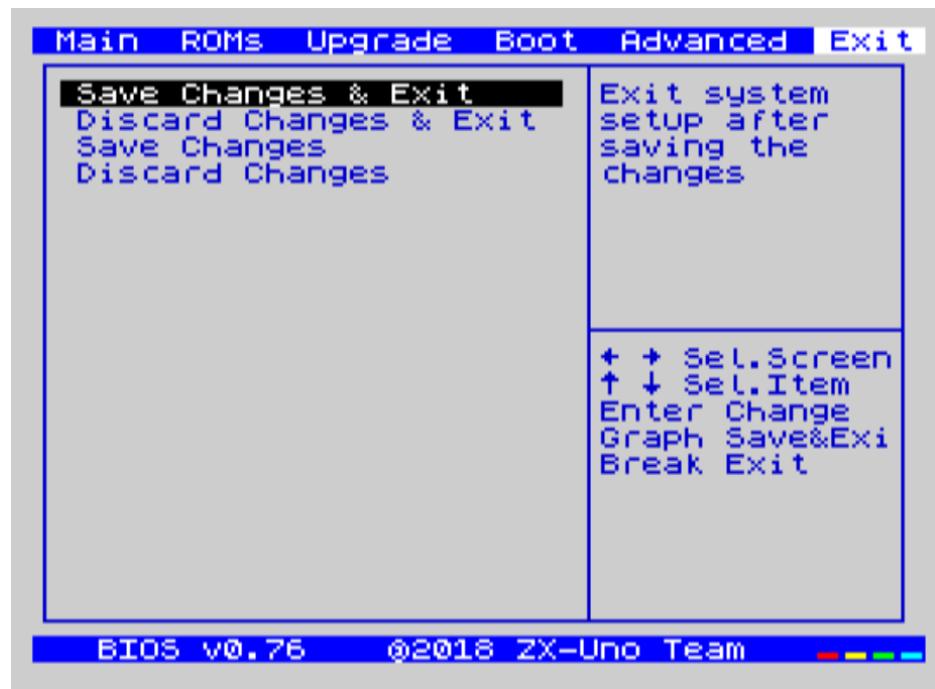

Finally, from the last screen you can:

- Exit BIOS configuration saving changes (in some cases you will also need a power reset)
- Discard changes and exit
- Save changes without exiting
- Discard Changes

ZX Spectrum

The main core is the one implementing a ZX Spectrum computer. This core is special, and it cannot be replaced for another that is not a ZX Spectrum, since the ZXUNO+ uses it for its operation.

These are some of its main characteristics:

- ZX Spectrum 48K, 128K, Pentagon and Chloe 280SE implementation
- ULA with ULAPlus, Timex and Radastan modes (including hardware scroll and selectable palette group)
- Ability to disable memory contention (for Pentagon 128 compatibility)
- Ability to choose the keyboard behavior (issue 2 or issue 3)
- Possibility to choose the timing of the ULA (48K, 128K or Pentagon)
- Control of screen framing, configurable for type of timing, and possibility to choose between original Spectrum synchronisms or progressive PAL standard.
- Timex horizontal MMU support with HOME, DOC and EXT banks in RAM.
- Programmable raster interruption in line number, for any TV line.
- Possibility of activating/deactivating memory bank management registers, for better compatibility with each implemented model
- Ability to activate / deactivate the devices incorporated into the core to improve compatibility with certain programs
- ZXMMC and DIVMMC support for + 3e, esxdos and compatible firmwares
- Turbo Sound support
- SpecDrum support
- Covox support
- Each channel A, B, C of the two AY-3-8912, beeper and SpecDrum chips can be directed to the left, right, both or neither outputs, allowing the implementation of configurations such as ACB, ABC, etc.
- Real joystick and keyboard joystick support with Kempston, Sinclair 1 and 2, Cursor, Fuller and QAOPSpcM protocol.
- Turbo mode support at 7MHz, 14MHz, 28MHz
- Keyboard support (PS/2 protocol) and user-configurable mapping from within Spectrum itself.
- PS/2 mouse support emulating the Kempston Mouse protocol.
- Possibility of video output in composite video mode, RGB 15kHz (PAL and NTSC), or VGA.
- User selectable vertical refresh rate to improve compatibility with VGA monitors.
- Multicore boot support: from the Spectrum you can select an address of the SPI Flash and the FPGA will load a core from there.
- Loading **PZX** tape files from SD

ROMs

The ZX Spectrum core can be initialized using different ROM versions (48K, 128K, Plus 2, etc.). These are stored in the flash memory of the ZXUNO+, and you can choose which one to load by pressing the **Esc** key during boot. You can also define the ROM that you want to load by default using the BIOS setup.

See the [updates](#) section for more information on how to expand or modify the ROMs stored in flash memory.

DerbyPro

[DerbyPro](#) or [Derby++](#) is an enhanced firmware ROM for the ZX Spectrum, based on v1.4 of the Derby development ROM. The Spectrum 128 (codename "Derby") was a Spanish machine commissioned by Investronica and launched in 1985. It came with a keypad that provided additional editing keys. In 1986, the UK version came out with a simplified version of 128 BASIC and no keypad. Derby++ is developed from the Spanish ROM to include the benefits of both versions, without the drawbacks, and support for new hardware developments.

You can download the ROM, a user manual and other files from the [official Facebook Public Group](#).

This 64K ROM has support for new hardware, including the use of esxdos commands from 128 BASIC, so these flags can be used when [adding it to the SPI flash](#):

Flag	Meaning
d	Enable DivMMC
n	Enable NMI DivMMC (esxdos Menu)
t	Use 128K timings

CargandoLeches

CargandoLeches is a set of ZX Spectrum ROMs that started as a project to load games in any Spectrum model 15-20x faster. No tape is needed, but a digital audio source, as a computer, mobile device, MP3 player, etc. The new ROM detects the loading method and reverts to the original ROM code if needed. This is handled transparently, with no user or program intervention.

Since version 2.0 the project changed from a single ROM to more, each one with different options. This way, you can choose a different mix of options that may include:

- Ultrafast loading
- Reset & Play (After a software reset of the core, the system is ready to load from tape)
- POKE editor
- Enable or disable Sinclair BASIC token expansion

The whole ROM set is available to download from the repository in GitHub [here](#).

Depending on which ROM you choose, the flags when [adding to the SPI flash](#) may vary. For example, for the ROM [48le_ea_re_po](#) (with all features enabled), these flags can be used (we cannot enable NMI DivMMC since the POKE editor will use it):

Flag	Meaning
d	Enable DivMMC
h	Disable ROM high bit (1FFD bit 2)
l	Disable ROM low bit (7FFD bit 4)
x	Disable Timex mode

POKEs

When using a ROM with POKE option enabled:

1. Once the game is loaded, after pressing NMI a field will appear in the upper left corner of the screen
2. Enter the POKE address and press [Enter](#)
3. Enter the POKE value and press [Enter](#) again
4. Repeat steps 2. and 3. until all the desired POKEs are entered. To finish and return to the game, press [Enter](#) twice

Preparing ultrafast loading tapes

The ROMs with ultrafast loading enabled, need special tape audio data which is made from normal loading **TAP** files, without protections or turbo loading.

In order to create an ultrafast loading tape you need **leches** and **CgLeches** command line utilities. Those can be obtained, for Windows, from the [official repository](#). You can also obtain an unofficial version for MacOS from [this other repository](#).

In any other case, you can compile from the [source code at the official repository](#). For example, in Linux, to compile using **gcc** you only need these commands:

```
gcc leches.c -o leches
gcc CgLeches.c -o CgLeches
```

To create an ultrafast loading tape you have to use the **CgLeches** command from a terminal, giving, at least, the path to the original **TAP** file and also to the new file to create (**WAV** or **TZX**). There are also some other optional parameters, like the loading speed, between 0 and 7 (where 0 is fastest but also more incompatible), if you want to create a mono or stereo file (when making a **WAV**), and more.

Thus, to make a **WAV** file with an ultrafast loading tape from the file **Valley.tap**, with loading speed 5, you could type:

```
(...) CgLeches Valley.tap Valley.wav 5
```

This way, the file **Valley.wav** can be played from a computer or another device and load using the ROM (see the section about [loading from tape](#) for more info).



Due to hardware limitations, **TZX** files made with **CgLeches** do not work with a **Miniduino**, although they usually work with **PlayTZX**.

SE Basic IV

[SE Basic IV](#) is a free open-source Z80 interpreter for Microsoft BASIC. SE Basic IV is designed to run on the [Chloe 280SE](#) but it can also run on ZX-Uno and similar computers.

SE Basic was originally conceived as a new firmware for the [ZX Spectrum SE](#). The earliest versions of SE Basic were patches applied to the original ZX Spectrum ROM, but later versions have been rewritten based on the [open source TS1000 / ZX81 improved ROM](#).

Version 3, also known as [OpenSE BASIC](#), is still maintained as an open source replacement firmware for the Spectrum. It's [included in the main Debian repository](#) for use with emulators.

Version IV is a fork of the previous version, done because there was no room left to add new features to the 16K ROM. The initial release (4.0 Anya) added another 16K ROM with support for Timex hi-res mode. The syntax was still largely Sinclair BASIC compatible at this point. Version 4.2 was rebuilt specifically for the Chloe 280SE, dropping support for legacy devices such as tape, adding full compatibility and integrated support for the esxdos kernel, and migrating to Microsoft BASIC syntax.

While it shares a common code base with many versions of Sinclair BASIC (the TS1000 ROM), it differs from them in significant ways:

- Code page (8-bit ASCII) support.
- Error message localization.
- 38 additional tokens.
- Standard terminal display (80 x 24).
- Terminal character entry (CTRL, META).
- Keyboard buffer.
- Full sized keyboard support.
- Designed to take full advantage of the additional features of ZX-Uno Spectrum core

The main differences from Microsoft BASIC are:

- Token abbreviation.
- On-entry syntax checking.
- Typically, brackets are optional.
- Motorola style number entry: % – binary @ – octal \$ – hexadecimal
- Always-on expression evaluation.
- Separate logical and bitwise operators.
- Automatic data typing.

You can find much more information, including the user manual, etc. at [the official wiki page](#).

Other ROMs

Here are flag settings which work when adding to the SPI flash some other known custom ROMs:

ROM Name	Flags
Gosh Wonderful ROM v1.33	dnhl17x
Looking Glass 1.07	dnhl17x
ZX82 by Daniel A. Nagy	dnhl17
ZX85 by Daniel A. Nagy	dntmh1
Arcade Game Designer 0.1	thl17x

SD advanced format (+3e)

ZX Spectrum +3e is one ROM that can be used with ZX Spectrum core. This is an improved Sinclair ZX Spectrum +3, which can use hard disks or memory cards.

+3e uses its own partition format (called IDEDOS), to split the hard disk into several partitions to store data. ROM version 1.28 and later can share IDEDOS partitions with MBR partitions. In other cases, you must reserve the whole card for IDEDOS partitions.



The following partition scheme can only be used with ZX Spectrum core.



Each partition in IDEDOS can be between 1 and 16 Megabytes (16 million bytes) in size, and each disk can have between 1 and 65535 partitions. This means that the maximum space used in a card is about 1 TB.

This is one method to split a card into two or three parts, with the first partition IDEDOS (1GB), the second one FAT16 (4GB) and the third one FAT32 (using the remaining space in the card).

exsdos and other programs can be installed into the second partition [as explained earlier](#).

Windows

You can use Windows Disk Management utility. The steps are:

1. Remove all partitions from the card
2. Create a new extended partition, using the desired space for IDEDOS
3. Create a primary partition, 4GB in size, and format as FAT16
4. Optionally, create another primary partition using the remaining space and format as FAT32

MacOS

You will have to use the command line. The first task is to find out which device is the disk to format:

```
diskutil list
```

For this example, it will be disk 6:

```
(...)
/dev/disk6 (external, physical):
#:          TYPE NAME          SIZE      IDENTIFIER
 0:  FDisk_partition_scheme          *15.9 GB   disk6
 1:  DOS_FAT_32 UNKNOWN          15.9 GB   disk6s1
```

Instruction steps:

- Unmount the disk and edit the partition scheme (the second step requires admin privileges):

```
diskutil unmountDisk /dev/disk6
sudo fdisk -e /dev/rdisk6
```

```
fdisk: could not open MBR file /usr/standalone/i386/boot0: No such file or directory
Enter 'help' for information
fdisk: 1> erase
fdisk:*1> edit 1
Partition id ('0' to disable) [0 - FF]: [0] (? for help) 7F
Do you wish to edit in CHS mode? [n]
Partition offset [0 - 31116288]: [63] 128
Partition size [1 - 31116287]: [31116287] 2017152

fdisk:*1> edit 2
Partition id ('0' to disable) [0 - FF]: [0] (? for help) 06
Do you wish to edit in CHS mode? [n]
Partition offset [0 - 31116288]: [2017280]
Partition size [1 - 29099135]: [29099135] 7812504

fdisk:*1> flag 2

fdisk:*1> edit 3
Partition id ('0' to disable) [0 - FF]: [0] (? for help) 0B
Do you wish to edit in CHS mode? [n]
Partition offset [0 - 31116288]: [9829784]
Partition size [1 - 21286504]: [21286504]

fdisk:*1> print
      Starting      Ending
 #: id cyl hd sec - cyl hd sec [      start -      size]
-----
 1: 7F 1023 254 63 - 1023 254 63 [        128 -    2017152] <Unknown ID>
 2: 06 1023 254 63 - 1023 254 63 [    2017280 -    7812504] DOS > 32MB
 3: 0B 1023 254 63 - 1023 254 63 [    9829784 -   21286504] Win95 FAT-32
 4: 00    0    0    0 -    0    0    0 [          0 -          0] unused

fdisk:*1> write
fdisk: 1> quit
```

- Format the FAT partitions (admin privileges required)

```
diskutil unmountDisk /dev/disk6
sudo newfs_msdos -F 16 -v ZXUNOPLUS -c 128 /dev/rdisk6s2
sudo newfs_msdos -F 32 -v EXTRA -c 128 /dev/rdisk6s3
```

3. Confirm that the new partition scheme has been applied:

```
diskutil list
```

```
(...)
/dev/disk6 (external, physical):
 #:          TYPE NAME      SIZE    IDENTIFIER
 0:  FDisk_partition_scheme          *15.9 GB   disk6
 1:          0x7F                1.0 GB   disk6s1
 2:  DOS_FAT_16 ZXUNOPLUS        4.0 GB   disk6s2
 3:  DOS_FAT_32 EXTRA           10.9 GB  disk6s3
```

Linux

You can use the command line. First, find out the device to erase:

```
lsblk
```

For this example, it will be **sdc**:

```
NAME      MAJ:MIN RM  SIZE RO TYPE MOUNTPOINT
...
sdc       179:0    0 15,8G  0 disk
└─sdc1    179:1    0 15,8G  0 part
```

Instructions:

1. Verify that the disk isn't mounted and edit the partition scheme (this step requires root privileges):

```
sudo fdisk --compatibility=dos /dev/sdc
```

Welcome to fdisk

Changes will remain in memory only, until you decide to write them.

Be careful before using the write command.

Command (m for help): n

Partition type

 p primary (0 primary, 0 extended, 4 free)
 e extended (container for logical partitions)

Select (default p): p

Partition number (1-4, default 1): 1

First sector (62-31116288, default 62): 128

Last sector, +/-sectors or +/-size{K,M,G,T,P} (128-31116288, default 31116288):
2017152

Created a new partition 1 of type 'Linux'

Command (m for help): t

Selected partition 1

Hex code (type L to list all codes): 7f

Changed type of partition 'Linux' to 'unknown'.

Command (m for help): n

Partition type

 p primary (1 primary, 0 extended, 3 free)
 e extended (container for logical partitions)

Select (default p): p

Partition number (2-4, default 2):

First sector (45-31116288, default 45): 2017280 .

Last sector, +/-sectors or +/-size{K,M,G,T,P} (2017153-31116288, default 31116288):
7812504

Created a new partition 2 of type 'Linux'

Command (m for help): t

Partition number (1,2, default 2): 2

Hex code (type L to list all codes): 6

Changed type of partition 'Linux' to 'FAT16'.

Command (m for help): a

Partition number (1,2, default 2): 2

The bootable flag on partition 2 is enabled now.

```
Command (m for help): n
Partition type
  p  primary (1 primary, 0 extended, 3 free)
  e  extended (container for logical partitions)
Select (default p): p
Partition number (2-4, default 3): 3
First sector (45-31116288, default 45): 9829784
Last sector, +/-sectors or +/-size{K,M,G,T,P} (2017153-31116288, default 31116288):
31116288
```

Created a new partition 2 of type 'Linux'

```
Command (m for help): t
Partition number (1,2, default 2): 2
Hex code (type L to list all codes): b
```

Changed type of partition 'Linux' to 'W95 FAT32'.

```
Command (m for help): p
Disk /dev/sda
Disklabel type: dos
Disk identifier
```

Device	Boot	Start	End	Sectors	Size	Id	Type
/dev/sda1		128	2017152	2017025	984,9M	7f	unknown
/dev/sda2	*	2017280	7626751	7812504	2,7G	b	FAT16
/dev/sda3		9829784	7626751	21286504	21G	b	W95 FAT32

2. Format both FAT partitions (requires root privileges)

```
sudo mkfs.fat -F 16 -n ZXUNOPLUS -s 128 /dev/sdc2
sudo mkfs.fat -F 32 -n EXTRA -s 128 /dev/sdc3
```

3. Confirm that the partition scheme has been changed:

```
lsblk
```

NAME	MAJ:MIN	RM	SIZE	RO	TYPE	MOUNTPOINT
(...)						
sda	179:0	0	15,8G	0	disk	
└─sda1	179:1	0	1G	0	part	
└─sda2	179:2	0	4G	0	part	
└─sda3	179:3	0	10,8G	0	part	

+3e

Once the SD card is ready to use, you can start Spectrum core with a +3e ROM and format the IDEDOS part.

The first step is determine the disk geometry. With the cart inserted into the ZXUNO+, type the command:

```
CAT TAB
```

This will give a result showing the number of [cylinders, heads and sectors](#).

With this info, we estimate the size of our partition, using cylinders. For example, if the number of cylinders is 32768, and we want to use 1GB of a 16GB card, the number of cylinders needed would be $32768/16=2048$. This way, the IDEDOS partition can be formatted using that number:

```
FORMAT TO 0,100,2048
```

The first value (**0**) is the drive to use (the first one), the second value is the maximum number of IDEDOS partitions, and the third one is the number of cylinders to use.

Once formatted, you can create new partitions. For example, to create a 16MB partition with the name "Software", another 4GB partition named "Swap" (to use as swap) and another one named "Utils", 8MB in size:

```
NEW DATA "Software",16
NEW EXP "Swap1",4
NEW DATA "Utils",8
```

For more information about the different +3e disk commands , you can check [this page at World of Spectrum](#).

esxdos

Basic Guide

There are two different kind of esxdos commands, the so-called "DOT" commands, which, as the name suggests, begin with a period, and the commands that are extensions to the existing ones in BASIC.

The main "DOT" commands are the following:

- **128**: Para enter 128K mode from within 48K mode
- **cd**: Change current working directory
- **chmod**: Change file attributes
- **cp**: Copy a file
- **divideo**: Play a DivIDEo (.DVO) video file
- **drives**: Show currently available drives
- **dskprobe**: Utility which shows low level content of an storage device
- **dumpmem**: Can dump RAM memory content to a file
- **file**: Tries to recognize the type of data contained in a file (like the UNIX command)
- **gramon**: Monitor to search graphics, sprites, fonts, etc. in RAM memory
- **hexdump**: Shows the contents of a file using hexadecimal notation
- **hexview**: Allow to see and navigate through the contents os a file using hexadecimal notation
- **launcher**: Creates a shortcut (launcher) to open directly a TAP or BAS file
- **ls**: Show the content of a directory
- **lstap**: Show the content of a .TAP file
- **mkdir**: Create a directory
- **mktrd**: Create a .TRD disk file
- **more**: Show the content of a text file
- **mv**: Move a file
- **partinfo**: Show partition information of an storage device
- **playpt3**: Play .PT3 music file
- **playsqt**: Play .SQT music file
- **playstc**: Play .STC music file
- **playtfm**: Play .TFC music file
- **playwav**: Play .WAV audio file
- **rm**: Remove a file or a directory
- **snapshot**: Load snapshot file

- **speakcz**: Reads text aloud using czech pronunciation
- **tapein**: Mounts a .TAP file so that it can be used then from BASIC using LOAD sentence
- **tapeout**: Mount a .TAP file so that it can be used then from BASIC using SAVE sentence
- **vdisk**: Mount a .TRD disk file to use with the TR-DOS environment (once all the drives have been mounted, you can enter TR-DOS emulation by typing: **RANDOMIZE USR 15616**)

Some BASIC extended commands are:

- **GO TO** to change the current drive and/or directory (e.g.: **GO TO hd1** or **GO TO hd0"games"**)
- **CAT** to show the content of a drive
- **LOAD** to load a file from a drive (BASIC Program, SCREEN, CODE, etc. for example **LOAD *"Screen.scr" SCREEN\$**)
- **SAVE** to save data in a file (e.g: **SAVE *"Program.bas"**)
- **ERASE** to delete a file

In addition, esxdos also has an NMI manager, an application that loads when NMI is pressed, and lets you browse the SD card and load easily files (TAP, Z80, TRD, etc.). Pressing the "H" key invokes a help screen, which shows all the available keys.



The esxdos manager shows file and directory entries in the order stored in the internal FAT table, and not alphabetically. If you want to see them ordered, you have to reorder the SD card structure with a utility like Fat Sorter for Windows, [FATsort](#) for Linux and MacOS, [YAFS](#), [SDSorter](#) or other.



There are several alternative file browsers like [Long Filename Browser by Bob Fossil](#) o [New NMI Handler by Dr. Slump](#) with features that the original esxdos manager does not have

ZXUNO+ Commands

As explained in the installation part, there are a series of commands that are exclusive to ZXUNO+:

- **back16m**: Dumps to a **FLASH.ZX1** file, in the root directory of the SD card, the contents of a 16 Meg SPI Flash memory. It must be run while using a "root" mode ROM. After finishing, it is necessary to execute the command **.ls** so that the cache is written to the card
- **corebios**: To upddate simultaneously ZX Spectrum core and BIOS
- **dmaplayw**: Plays .WAV file, which has to be 8 bits, unsigned and sampled at 15625 Hz
- **esprst**: Resets the WiFi ESP8266(ESP-12) module
- **iwconfig**: To configure the WiFi module
- **joyconf**: Configuration and tests for keyboard and DB joysticks
- **keymap**: Used to load a different keyboard map definition
- **loadpzx**: To load a .PZX tape file
- **playmid**: Plays .MID music files using the MIDI addon
- **playrmov**: Plays [radastanian format video files .RDM](#). This command does not work on 48K mode.
- **romsback**: Dumps to a RomPack File named **ROMS.ZX1**, in the root directory of the SD card, all ZX Spectrum core ROMS which are stored in SPI flash memory. It must be run while using a "root" mode ROM.
- **romsupgr**: Load from a RomPack filel named **ROMS.ZX1**, in the root directory of the SD card, all ZX Spectrum core ROMS into SPI flash memory. It must be run while using a "root" mode ROM
- **upgr16m**: Load the content of a **FLASH.ZX1** file, in the root directory of the SD card, to a 16 Meg SPI Flash memory. It must be run while using a "root" mode ROM
- **zxuc**: Utility to configure al options of BIOS, which also can be stored in the SD in configuration files that can be loaded later
- **zxunocfg**: Configuration utilility for certain features of ZX-Uno such as timings, contention, keyboard type, CPU speed, video type or vertical frequency

Making RDM (RaDastan Movie) files

The **PLAYMOV** "DOT" command plays radastanian format video files. To convert your own videos, you need **makevideoradas**, a utility that is available at [SVN repository](#).

If using Windows, there is already an executable file ([makevideoradas.exe](#)). For Linux or MacOS, you must have installed command line developer utilities in order to compile an executable

```
gcc makevideoradas.c -o makevideoradas
```

Apart from **makevideoradas**, you need another two tools: **ffmpeg** and **imagemagick**. These can be installed with a package manager ([apt](#), [yum](#), [pacman](#), [brew](#), etc.) or downloading the source code and compiling.

Now, the first step to convert our video (for example [myvideo.mp4](#)), is exporting the frames as 128x96 pixel BMP image files. We create a temporary file ([img](#) for this example), to store them.

```
mkdir img
(...)/ffmpeg -i myvideo.mp4 -vf "scale=128:96,fps=25" -start_number 0
img/output%05d.bmp
```

Now we transform the **BMP** files to 16 colours (v3) **BMP** files.

```
(...)/magick mogrify -colors 16 -format bmp -define bmp:format=bmp3 img/*.bmp
```

Finally, we assemble the **.RDM** file (in this example [myvideo.rdm](#)) and cleanup the temporary files and directory.

```
(...)/makevideoradas img/output
mv img/output.rdm ../myvideo.rdm
rm -rf img
```

There is more information about all this process at [this thread in Zona de Pruebas forums](#).

CP/M

There's a Multicomp core for ZX-Uno, which is CP/M 2.2, or you can run CP/M 3.0 for Spectrum with a +3e ROM and a specially prepared SD card. However, only 51 columns are available, and you will have to be jumping between the left and the right side in order to see all the 80 columns, which is quite cumbersome.

Multicomp

multicomp_z80_CPM.ZX1 <https://obsolescence.wixsite.com/obsolescence/multicomp-fpga-cpm-demo-disk> <http://searle.x10host.com/Multicomp/index.html> <http://searle.x10host.com/Multicomp/cpm/fpgaCPM.html#UsingTheMachine>

+3

<https://www.zxuno.com/forum/viewtopic.php?f=12&t=1427&hilit=core#p16169>
<https://www.zxuno.com/forum/viewtopic.php?f=39&t=4099>

FUZIX

FUZIX is a fusion of various elements from [UZI](#) (an implementation of the Unix kernel written for a Z80 based computer), extended from the 7th Edition Unix kernel to somewhere in the SYS3 to SYS5.x world, with bits of POSIX.

It is not yet useful although you can build and boot it and run test application code. A lot of work is still needed on the utilities and libraries.

At the moment of writing these lines, the [officially built images](#) do not work with all the ZXUNO+ ZX Spectrum cores. However, building from the source code, does work. The following instructions have been tested with [the latest code on June 2021](#).

How to Build

The following instructions have been made using a clean installation of Fedora Workstation Linux (Fedora 34). Apart from the package installation commands, all the other steps should work with many other Linux distributions.

Install the needed packages:

```
sudo dnf groupinstall -y 'Development Tools'
sudo dnf install -y gcc-c++ automake boost-devel gutils flex texinfo bison byacc
```

Get the special version of [SDCC compiler](#) for Fuzix, and build it:

```
git clone https://github.com/EtchedPixels/sdcc280.git

cd sdcc280
cd sdcc
./configure
make
sudo make install
cd ../../
```

Get Fuzix source code:

```
git clone https://github.com/EtchedPixels/FUZIX.git
cd FUZIX
```

Edit [Makefile](#) and change the line with TARGET= to TARGET=zxdiv. Build:

```
sudo make
```

Get the esxdos binary and kernel image from this paths:

```
./Kernel/platform-zxdiv/FUZIX
./Kernel/platform-zxdiv/FUZIX.BIN
```

Build the root filesystem:

```
cd ./Standalone/filesystem-src
./build-filesystem rootfs 256 65535
cd ../../
```

Get the root filesystem image file from this location:

```
./build-filesystem/rootfs
```

How to use

You need a MBR partition table on the SD card. You can set up one or two primary partitions [as usual](#) (the first one with a functional esxdos installation), leaving enough space at the end to add one 32MB (Type [7E](#)) primary partition for the root file system and one 4MB (Type [7F](#)) primary partition for swap.


Copy the rootfs filesystem to the type [7E](#) partition. You can use the [dd](#) utility, included with Linux, MacOS, etc. (and also [ported to Windows](#)).

After you find the device name for the [7E](#) partition, use that as destination for the [rootfs](#) file. For example, for [/dev/rdisks3](#):

```
sudo dd if=rootfs of=/dev/rdisks3
```


Copy the [FUZIX](#) command into the [BIN](#) directory and copy [FUZIX.BIN](#) to the top level directory of the esxdos partition.

Boot into a Spectrum core with a 128K ROM and with esxdos, then type '.fuzix', and press **Enter**.

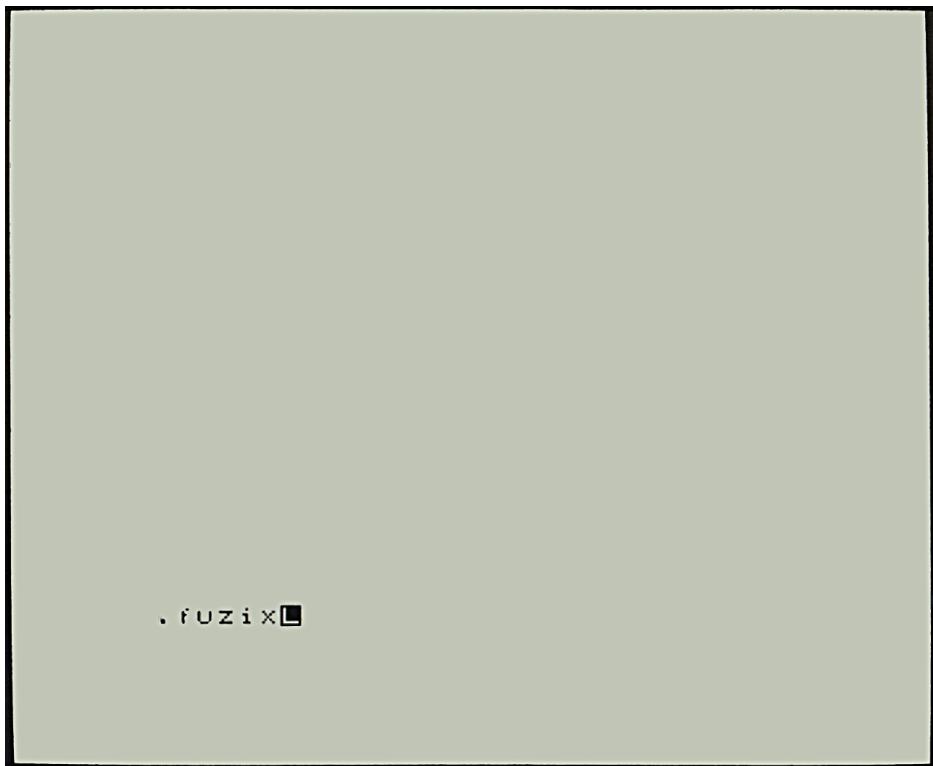

Your keyboard configuration on BIOS should be using an english layout, or you won't be able to type some characters like |.

After a few seconds, the system should detect the SD card and find the partitions. In this example, the root is the third partition of SD 0.

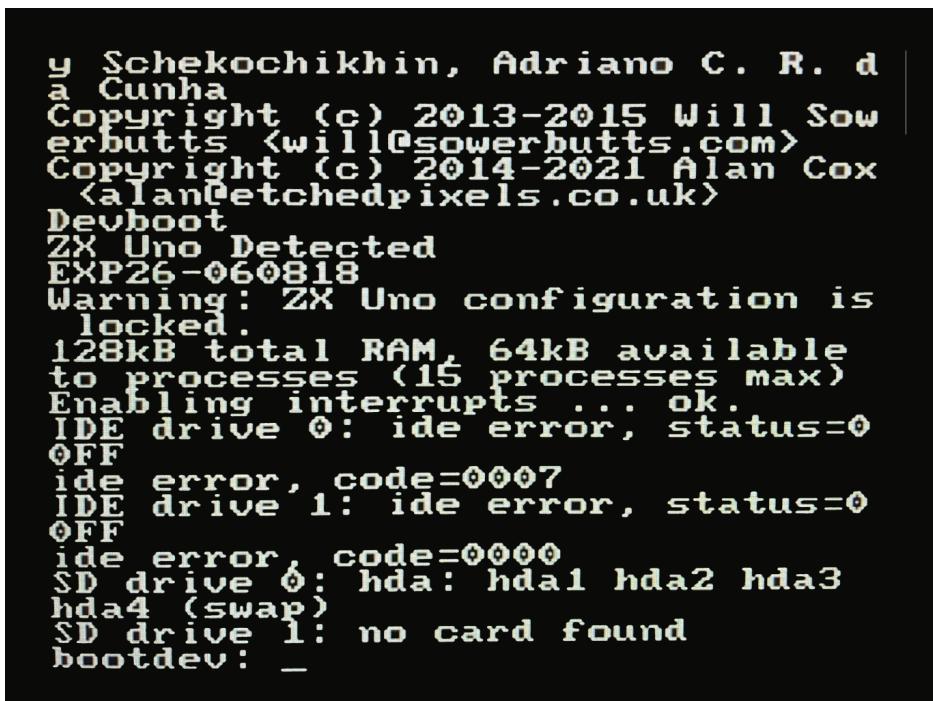

Type the rootfs partition (e.g. **hd3**) and press **Enter**.

```

Devboot
ZX Uno Detected
EXP26-060818
Warning: ZX Uno configuration is
locked.
128kB total RAM, 64kB available
to processes (15 processes max)
Enabling interrupts ..: ok.
IDE drive 0: ide error; status=0
OFF
ide error, code=0007
IDE drive 1: ide error, status=0
OFF
ide error, code=0000
SD drive 0: hda: hda1 hda2 hda3
hda4 (swap)
SD drive 1: no card found
bootdev: hda3
Mounting root fs (root_dev=3, ro
): OK
Starting /init
10 buffers added
init version 0.9.0ac#1
-

```


Set up date (press **Enter**) and time (press **Enter**).

```

locked.
128kB total RAM, 64kB available
to processes (15 processes max)
Enabling interrupts ..: ok.
IDE drive 0: ide error; status=0
OFF
ide error, code=0007
IDE drive 1: ide error, status=0
OFF
ide error, code=0000
SD drive 0: hda: hda1 hda2 hda3
hda4 (swap)
SD drive 1: no card found
bootdev: hda3
Mounting root fs (root_dev=3, ro
): OK
Starting /init
10 buffers added
init version 0.9.0ac#1
Checking root file system.
Current date is Fri 2021-07-02
Enter new date: 2021-07-03
Current time is 21:13:04
Enter new time: 17:49:00

```

Login with `root` user and no password.

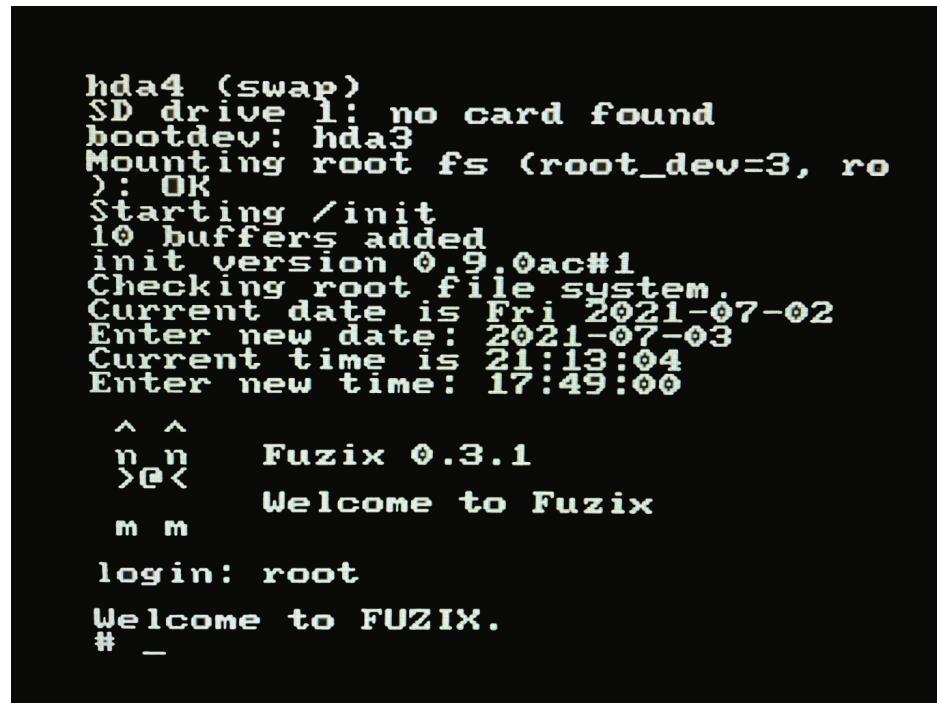

```
hda4 (swap)
SD drive 1: no card found
bootdev: hda3
Mounting root fs (root_dev=3, ro)
): OK
Starting /init
10 buffers added
init version 0.9.0ac#1
Checking root file system.
Current date is Fri 2021-07-02
Enter new date: 2021-07-03
Current time is 21:13:04
Enter new time: 17:49:00

^ ^
n n      Fuzix 0.3.1
>@<      Welcome to Fuzix
m m

login: root
Welcome to FUZIX.
# _
```

Now you have a Fuzix shell.



When finished, remember to stop the system using the `shutdown` command or the root filesystem will be marked as not clean, and a filesystem check will be forced on the next Fuzix boot.

Upgrade

BIOS

To update the BIOS, a file named **FIRMWARE.ZX1** (for a ZXUNO+ with an FPGA LX16 board) or **FIRMWARE.ZX1** must be obtained. The latest version of the firmware files can be downloaded from [the official repository](#)



Updating the firmware (BIOS) is delicate. It should not be done if it is not necessary. If doing so, ensure that the ZXUNO+ has uninterrupted power (such as a UPS or a laptop USB with battery).

Copy the file to the root of the SD card, turn on and press **F2** to enter BIOS, select **Upgrade**, choose "*Upgrade BIOS for ZX*", and then "*SDfile*". The system will read the file **FIRMWARE…** and notify when finished.

ROMs

The flash memory of a ZXUNO+ has reserved 64 slots, 16K each, to store ZX Spectrum ROM images. Thus, an original ZX Spectrum ROM (16K) will take one slot, a ZX Spectrum 128K ROM (32K) will be two slots, and a ZX Spectrum +2A ROM (64K) will need 4 slots.

You can add a new ROM pressing the key **N** at the BIOS [ROMs screen](#), connecting an audio cable to the board, and playing a ROM audio tape. ROM audio tapes can be made from a **.tap** file built with the [GenRom](#) utility, available at [ZX-Uno Code Repository](#).

To update at once all the ROMs installed for ZX Spectrum, a RomPack file named **ROMS.ZX1** must be obtained, which must be copied to the SD card. Boot the ZXUNO+ using a "rooted" ROM, and then just enter the command **.romsupgr**. This will burn all the ROMs, which will be available for use.



Remember that [if the ZXUNO+ is started while pressing the / key](#), then the default ROM of the ZX Spectrum core will be loaded in "root" mode.

To do the opposite process (save the ROMs in a RomPack file named **ROMS.ZX1**), you can use the `**.romsback**` command.

RomPack files can be easily edited with the [ZX1RomPack](#) utility. Although it is a Windows program, it works perfectly, for example using [Wine](#) or similar programs, either on MacOS or Linux.

Cores

There are a number of available spaces where you can store cores (the number depends on the size of the SPI Flash of the ZXUNO+ model), the first space being reserved for the main ZX Spectrum (this does not prevent having more ZX Spectrum cores in other space as well of the first).

Official cores are [available to download](#) from GitHub repository.

To update or install a new core there are several possibilities.

The easiest way is to obtain the latest version of the file that defines the core, which will be a file that must be named `COREnn.ZX1`, where `nn` is the slot number where to install (for example `CORE.ZX1` or `CORE2.ZX1` for slot 2).



Starting with BIOS version 0.80, files are named using the `COREXXy.ZXn` convention where `XX` *always* is a two-digit number. Thus, an old `CORE4.ZX1` file has to be renamed as `CORE04.ZX1`. The `y` part of the name is ignored, so longer and more descriptive names can be used (such as `CORE04_example.ZX1`).

Copy the file to the root of the SD card, turn on and press `F2` to enter BIOS. Choose `Upgrade`, select the row corresponding to the chosen core number (for example, 2 - just after Spectrum), press enter and then "SD file". The system will read the file `COREnn ..` and warn when it is updated, although first it will ask for the name (to be shown in the list to choose from at startup and in the BIOS list).



The ZX Spectrum core update is exactly the same as other cores, but instead of the name `CORE1.ZX1`, it has to be a file named `SPECTRUM.ZX1`.

esxdos

To update esxdos to a new version, the distribution must be obtained from [the official website](#).

Once downloaded and extracted, the contents of `BIN` and `SYS` directories have to be copied to the root of the card, merging the existing ones (to preserve the exclusive ZXUNO+ commands).

Copy `ESXMMC.BIN` (or `ESXMMC.ROM`, depending on version) to the root of the SD card.

Start ZXUNO+ with the card inserted and press `F2` to access BIOS setup. Select the `Upgrade` menu and choose "Upgrade esxdos for ZX". In the dialog that appears choose "SD file" and, when it asks "Load from SD" answer "Yes" to the question "Are you sure?". The content of the file `ESXMMC...` will be read, written to the flash storage and you will be notified when it is updated.

Do a Hard-reset, or turn it off and on.

If everything has been done correctly, when you turn on the ZXUNO+ you will see how esxdos detects the card and loads the necessary components to work, showing the new version at the top.

Flash Memory

You also can update all the FPGA flash memory. At this moment, from the BIOS you can only use 16MiB image files.

Copy the image file (16MiB) **FLASH.ZX1** to the root of the SD card.

Turn on the ZXUNO+ and press the **F2** key during boot to access the BIOS setup. Select the menu **Upgrade** and then choos the option "*Upgrade flash from SD*". Press Enter, choose **Yes**, and press Enter again to start the Flash writing process.

Do a Hard-Reset or turn of and on again.



This process can't be undone, and it will replace all the previously installed cores, the BIOS, the ZX Spectrum ROMs and their configuration with the data in the image file.

Other cores

ZX Spectrum EXP27

Based on the source of EXP27-160820 core by mcleod_ideafix, with some modifications (by Spark2k06, Neuro, Yombo and azesmbog):

- Different colour modes including monochrome
- Option to enable or disable the Wi-Fi addon
- Modified activation of Turbo Boost Mode
- Gest back the option to use custom marks in PZX, just like the first T24 unofficial core did (without SAA1099)
- SAA1099 audio chip (without PZX)

There are two differente versions of the core, one with PZX support and no SAA1099 audio chip, and another one with SAA1099 chip but without PZX support.

SD card format

You may use a SD card with the first partition formatted as FAT16 or FAT32, and inside, an esxdos distribution matching the version installed in BIOS (see the [esxdos corresponding section](#) for more info).

See the [corresponding section](#) for instructions of how to install this alternative core in ZXUNO+.

Keyboard

Special keys and buttons

While the core is running:

- **End**: Switches between colour, green monochrome, amber monochrome and black and white
- **F6**: Sets up a custom mark at the current PZX position (only in the version with PZX support)
- `F7: PXC Play/Pause (only in the version with PZX support)
- `F8: Moves the PZX position to a the custom mark (only in the version with PZX support)
- `CTRL+ F8: Rewinds the PZX position to a "tag BRWS" mark. These marks are used, for example, to label where a multiload starts (only in the version with PZX support)
- `F9: Stops playing the PZX and set the position back to the beginning (only in the version with PZX support)
- **F11**: Enable or disable the Wi-Fi module
- **F12**: Enable or disable 28 MHz CPU speed.

The PZX player will stop when it gets to the end of the file, or if it finds a STOP mark, or if it finds a STOP IF IN 48K mark and the core is in 48K mode (no 128K pagination).



You can add BRWS and STOP marks to a PZX file using the program [ZX-BlockEditor](#), which is part of de [ZX-Modules](#).

ZX Spectrum 48K (Kyp)

[Alternative core](#), whose objective is to be the most accurate implementation in timings, memory contention, etc.

Main features:

- Specdrum
- Turbosound (two AY chips) with mix selection ACB/ABC
- DivMMC with esxdos 0.8.8
- Composite video/RGB and VGA video output

SD card format

You need a SD card with the first partition formatted as FAT16 or FAT32, and inside, the standard esxDOS 0.8.8 (see the [esxdos corresponding section](#) for more info).

See the [corresponding section](#) for instructions of how to install this alternative core in ZXUNO+.

Keyboard

Special keys and buttons

While the core is running:

- **Esc**: BREAK
- **F5**: NMI
- **F8**: Change Turbosound mixer configuration between ACB and ABC.
- **Scroll Lock**: Switches between composite and VGA video modes.
- **Ctrl+Alt+Backspace** or **F11**: Hard reset. Backspace is the delete key, located in the top-right portion of the keyboard, above **Enter**.
- **Ctrl+Alt+Supr** or **F12**: Soft reset.

ZX Spectrum 128K (Kyp)

[Alternative core](#), whose objective is to be the most accurate implementation in timings, memory contention, etc.

Main features:

- Specdrum
- Turbosound (two AY chips) with mix selection ACB/ABC
- DivMMC with esxdos 0.8.8

SD card format

You need a SD card with the first partition formatted as FAT16 or FAT32, and inside, the standard esxDOS 0.8.8 (see [esxdos corresponding section](#) for more info).

See the [corresponding section](#) for instructions of how to install this alternative core in ZXUNO+.

Keyboard

Special keys and buttons

While the core is running:

- **Esc**: BREAK
- **F5**: NMI
- **F8**: Change Turbosound mixer configuration between ACB and ABC.
- **Ctrl+Alt+Backspace** or **F11**: Hard reset. Backspace is the delete key, located in the top-right portion of the keyboard, above **Enter**.
- **Ctrl+Alt+Supr** or **F12**: Soft reset.

ZX Spectrum (Kyp/azesmbog)

A mixed version, synthesized by azesmbog, of the two cores <<,#_zx_spectrum_48k_kyp,48K>> y [128K](#) by Kyp, adding also a Pentagon mode.

Its main features are:

- Specdrum
- Turbosound (two AY chips) with mix selection ACB/ABC
- SAA1099 chip
- DivMMC with esxdos 0.8.9
- Composite video/RGB and VGA video output at 50Hz

SD card format

You need a SD card with the first partition formatted as FAT16 or FAT32, and inside, the standard esxDOS 0.8.8 (see [esxdos corresponding section](#) for more info).

See the [corresponding section](#) for instructions of how to install this alternative core in ZXUNO+.

Keyboard

Special keys and buttons

While the core is running:

- **F5**: NMI
- **F8**: Change Turbosound between ACB and ABC.
- **F10**: Pentagon Mode
- **F11**: 48K Mode
- **F12**: 128K Mode
- **Ctrl+Alt+Backspace** or **F11**: Hard reset. Backspace is the delete key, located in the top-right portion of the keyboard, above **Enter**
- **Ctrl+Alt+Supr** or **F12**: Soft reset.

The default mode on startup is 128K.



To see the standard menu on 128K mode, you have to use the esxdos dot command: **.128**.

ZX Spectrum TBBBlue

The [TBBBlue](#) firmware, was created by Victor Trucco and Fabio Belavenuto on en 2016. Originally thought to use a Z80 processor, it was changed afterwards to use Xilinx Spartan-6 FPGA, to add some more advanced features. This the base for [ZX Spectrum Next](#).

The latest ZX-Uno TBBBlue core is a version synthesized by azesmbog from the latest versions of the repository and has, among other, these features:

- Composite video/RGB and VGA video output
- SD support, with DivMMC
- Turbo Mode
- Timex Mode
- ULAPlus
- Multiface support
- Joystick support
- Turbosound
- Spectrum ROM selection on boot
- Three AY audio chips (as on ZX Spectrum Next), added by azesmbog
- SID sound chip, added by azesmbog

SD card format

An SD card with the first partition in FAT16 or FAT32 format is needed with, optionally, the esxdos distribution that matches the current BIOS configuration (see the [esxdos corresponding section](#) for more info).

Obtain the TBBBlue distribution that matches the core version, for example, looking in [ZX-Uno forums](#). Usually, the structure is something like this:

```
/  
+-TBBLUE/  
|   +-128.rom  
|   (...)  
|   +-config.ini  
|   (...)  
|   +-esxmmc.rom  
|   (...)  
|  
+-TBBLUE.FW
```



If you are using a SD card with [esxdos](#), the [esxmmc.rom](#) file version must match the one of the SD card.

See the [corresponding section](#) for instructions of how to install the TBBlue core in ZXUNO+.

Keyboard

Special keys and buttons

While the core is running:

F1: Hard Reset **Space+F1**: Boot menu **F2**: Enable or disable Scandoubler **F3**: Switches between 50Hz and 60Hz **F4**: Soft reset **F5**: CPU Pause **F9**: Multiface **F10**: NMI

Basic Guide

Pressing **Space+F1** a core reset occurs and then the boot menu appears, where the existing boot options in the **config.ini** file are shown.



Then, pressing **E**, you can access to the other core configuration options. You can change them with the cursor keys and the **Space** key. Press **Enter** to finish.



Acorn Atom

Acorn Atom was a home computer made by Acorn Computers Ltd. The ZXUNO+ core is an adaptation of the [AtomFPGA](#) project. You can get more information at [ZX-Uno Forums](#).

SD card format

You have to use a SD card with the first partition in FAT16 format.

Download the latest version of Atom Software Archive [from GitHub](#).

You can set up the files in the SD in two different ways:

1. Extract all the contents of the archive to the root of the SD card. **SYS** directory contents are compatible with esxdos **SYS** directory, so you can merge both into one.
2. Have less files an directories in the root directory. Create a directory named **ATOM** in the SD root, and copy inside all the uncompressed archive content, except for the directory **MANPAGES** which must also be in root. Then, extract and the files from **trick_ATOM_folder** archive (available [at ZX-Uno Forum](#)), replacing any file with the same name. You will get a file and directory structure like this:

```

/
+-ATOM/
|   +-AA/
|   | (... )
|   +-AGD/
|   |   +-SHOW2
|   |   +-SHOW3
|   | (... )
|   +-MENU
|   | (... )
|   +-TUBE/
|   |   +-BOOT6502
|   | (... )
|
+-MANPAGES/
|   +-CPM.MAN
|   +-FLEX.MAN
|   | (... )
|
+-MENU

```

Keyboard

Special keys and buttons


While the core is running:

- **Shift+F10**: Shows Atom Software Archive Menu
- **F10**: Soft Reset
- **F1**: Turbo mode 1Mhz
- **F2**: Turbo mode 2Mhz
- **F3**: Turbo mode 4Mhz
- **F4**: Turbo mode 8Mhz

The keyboard uses the following mapping:



Basic Guide

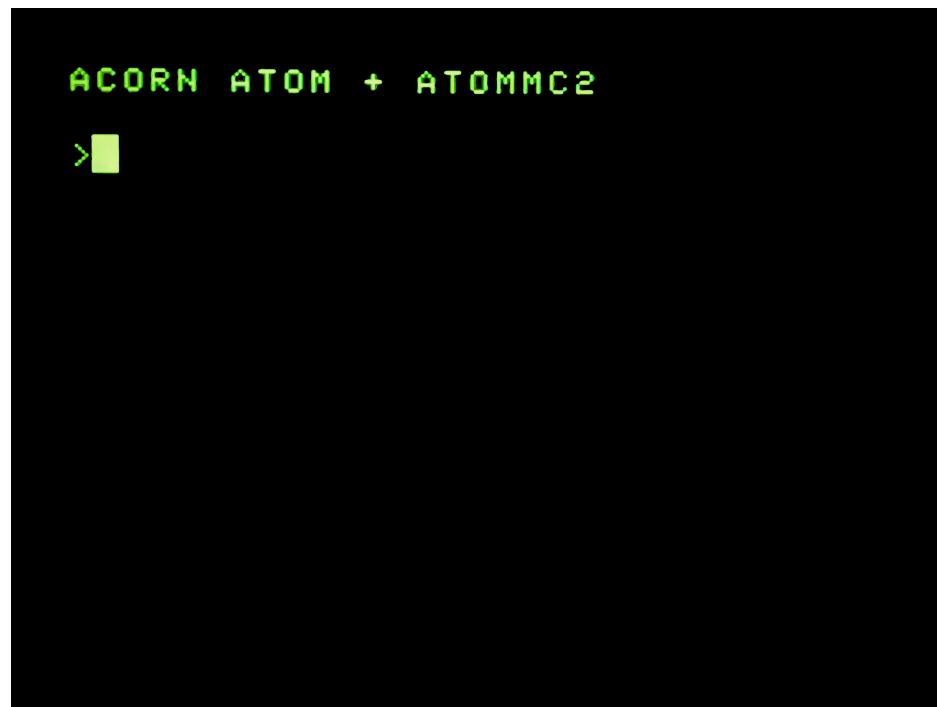

Once it's running, press **Shift+F10**, or type ***MENU** and **Enter**, to show a menu where you can choose and load Atom Software Archive programs from the card.

Acorn Electron

The [Acorn Electron](#) was a budget version of the BBC Micro educational/home computer. The core is based on el [David Banks \(hoglet\) original works](#).

Main features:

- Composite video/RGB and VGA 50Hz video output
- SD support with ".MMB" files
- Software loading via ZXUNO+ audio in port
- PS/2 keyboard

SD card format

An SD card with the first partition in FAT16 or FAT32 format is needed to load software from it. A special ROM inside the core (Smart SPI) reads a special file with disk images inside.

The file must have the name **BEEB.MMB** and it has to be in the root directory. You can make one with [MMBImager](#) for Windows, available at [ZX-Uno SVN Repository](#) (Usuario **guest**, contraseña **zxuno**) or with MMB/SSD Utils in perl, available at [GitHub](#).

The file has to be whole across the SD (not fragmented). You can use a program that can defrag files or FAT filesystems (like [Defraggler for Windows](#)) or use the following method:

1. Format the first SD partition using FAT16 or FAT32, but **NOT with quick format** (when using Windos, uncheck that option).
2. Copy **BEEM.MB** making sure it is the **FIRST file** being copied.
3. If you want you can add any other file to the SD (e.g. for using with other cores), but keep **ALWAYS BEEB.MMB** as the first file copied to the card.



Since the **MMB** file has the same name as the one for [BBC Micro core](#), you can use another core with full access to the SD card (like a ZX Spectrum core with esxdos), with both **MMB** files with a different name, and then rename the one for Acorn Electron as **BEEB.MMB** before running this core


Keyboard

Special keys and buttons

While the core is running:

- **Scroll Lock**: Switches between composite and VGA video.
- **Ctrl+Shift+1** to **Ctrl+Shift+4**: Use other graphic modes (60Hz, etc)
- **F10** and **Ctrl+F10**: Soft Reset
- **Ctrl+Alt+Backspace**: Hard reset. Backspace is the delete key, located in the top-right portion of the keyboard, above **Enter**

Basic Guide

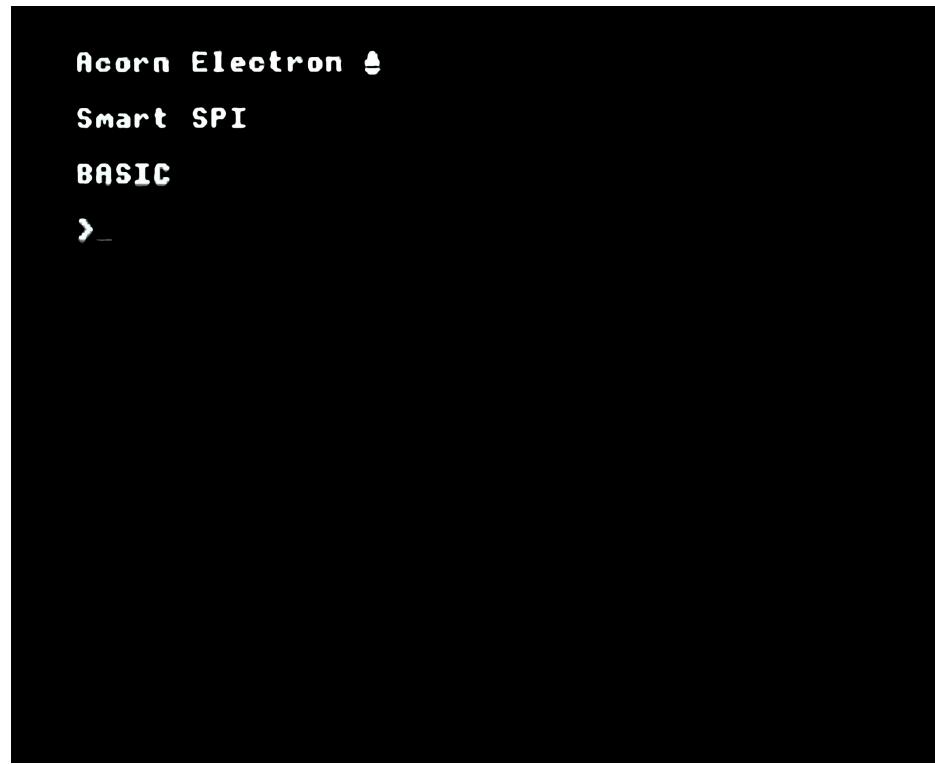

Once the SD card is inserted and the core running, if **BEEB.MMB** file was created correctly, on start, you should see:

```
Acorn Electron  
Smart SPI  
BASIC  
>
```

Disc 0 from the image file is mounted automatically, and you can see its contents using the command:

```
*CAT
```

To load, for example, the menu available with some image files available on internet, use the command:

```
CHAIN"MENU"
```

To load using the audio input:

```
*TAPE  
CHAIN""
```

And then start playing the external audio device.

To show the list of available discs inside **BEEB.MMB** file:

```
*DCAT
```

To put a particular virtual disc in a virtual drive:

```
*DIN discnum drivenum
```

Amstrad CPC 464

The [Amstrad CPC 464](#) was the first of a series of 8-bit home computers produced by Amstrad.

ZXUNO+ version has been [made by McLeod](#).

Core features:

- Full Amstrad CPC 464: 64KB RAM, 32KB ROM, tape interface, keyboard and joystick
- RGB/composite video and VGA (50Hz) support
- VGA Scanlines
- 1 player joystick support



There is another version (Amstrad CPC6128) of this core, synthesized by Jepalza, which adds 128K memory pagination, It would be like a CPC6128 with a broken floppy drive

SD card format

This core does not use the SD card.

Keyboard

Special keys and buttons

During core execution:

- **Del:** CLR.
- **Print Scr or Left Windows:** COPY
- **F10** and **Ctrl+F10**: Soft Reset.
- **Ctrl+Alt+F5**: NMI.
- **Ctrl+Alt+Del**: Reset.
- **Ctrl+Alt+Backspace**: Hard reset. Backspace is the delete key, located in the top-right portion of the keyboard, above **Enter**.
- **End**: Switches between color and green screen modes

Basic Guide



When using BASIC, you can load a external tape (or [other external audio device](#)) with the command **RUN"**. Unlike the original machine, you can hear the audio while playing the tape.

Amstrad CPC 6128

The [Amstrad CPC 6128](#) was the successor to the Amstrad CPC 664 (only produced for approximately six months), and this one, was the successor to the Amstrad CPC 464.

ZXUNO+ Amstrad CPC 6128 core is based on the [FPGAmstrad](#) project by Renaud Hélias.

Some of its features are:

- VGA: 640x480 VGA centered at 60Hz
- Disk selection: The first disk image detected is inserted on startup, and pressing a key makes a reset and loads the next one

SD card format

You have to use a SD card with the first partition in FAT32 format ([0B Win95 FAT-32 Partition Type](#)), with a maximum of 4GB in size, and 4096 bytes per cluster.

You also need the following ROM files (they are available [at the original project Wiki](#)) or from the [GitHub repository](#):

- [OS6128.ROM](#)
- [BASIC1-1.ROM](#)
- [AMSDOS.ROM](#)
- [MAXAM.ROM](#)

It is also recommended to copy one or more disk image files ([DSK](#)) with the software that you want to run.

Copy all [ROM](#) and [DSK](#) files to the root directory of the FAT32 partition.

Keyboard

Special keys and buttons

During core execution:

- [Page Up](#): Reset the Amstrad computer and load the next [DSK](#) file alphabetically
- On a PS/2 keyboard, only the left shift key works properly

Basic Guide

Use the **CAT** command to see the contents of the currently loaded DSK file.

```
Amstrad 128K Microcomputer (v3)
©1985 Amstrad Consumer Electronics plc
and Locomotive Software Ltd.

BASIC 1.1

Ready
cat

Drive A: user 0
BRUCELEE.* 1K
136K free

Ready■
```

Type the command **RUN"<name>** to load a program from disk

```
Amstrad 128K Microcomputer (v3)
©1985 Amstrad Consumer Electronics plc
and Locomotive Software Ltd.

BASIC 1.1

Ready
cat

Drive A: user 0
BRUCELEE.* 1K
136K free

Ready
run"brucelee■
```

Press **Page Up** key to reset and load the next **DSK** file.

Apple I

The [Apple I](#), or Apple-1, was one of the first desktop computers, and the first to combine a microprocessor with a keyboard connection and a monitor.

The ZX-Uno core has been made by Subcritical, using the [Apple-One](#) project as a basis.

Some of its features are:

- PS/2 keyboard (english layout)
- Only VGA output
- Integer Basic included

SD card format

This core does not use the SD card.


Keyboard

The keyboard uses an english layout.

Take note that, on an Apple I, there is no delete key. Due to the way that the video signal is made, it is not possible to make the cursor come back to delete a character, so instead, a special one is used: _. This means that the text has gone back to delete from the data input (for example [PRN_INT](#) is interpreted as [PRINT](#)).

Basic Guide

Upon start, the Apple I boots with [Woz Monitor](#) (ROM loaded at [0xFF00](#))

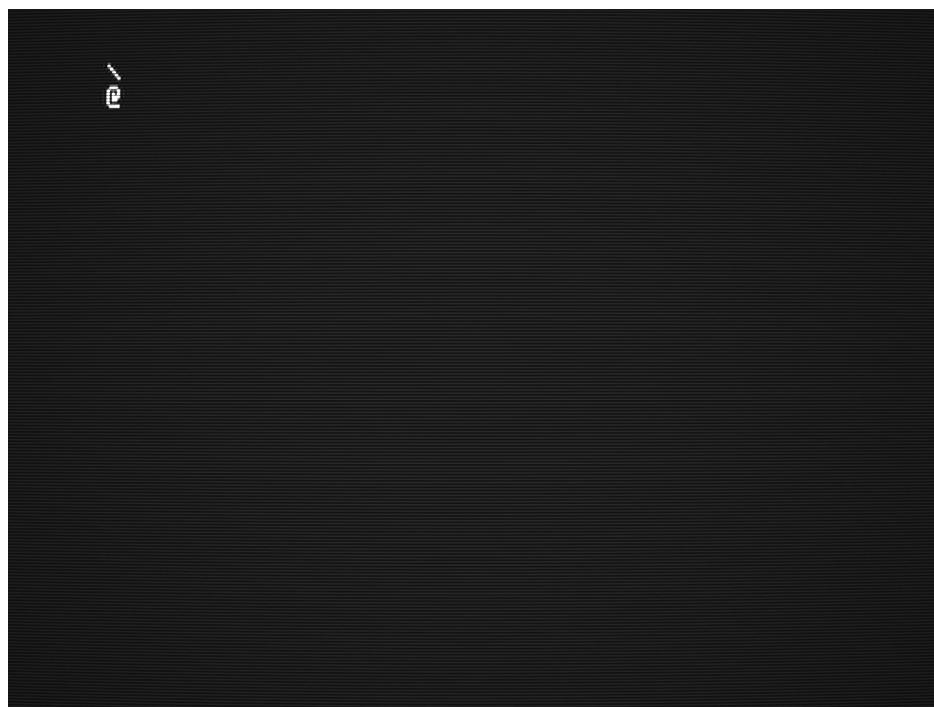

The BASIC interpreter included with this core is [Integer BASIC](#). To start it, you have to invoke the corresponding memory address ([0xE000](#)):

```
\  
E000R
```

Once the interpreter is loaded, the console changes in order to show that it is ready to accept [BASIC commands](#):

```
\  
E000R  
  
E000:4C  
>@
```

```
\  
E000R  
E000: 4C  
>10 PRINT "HELLO"  
>RUN
```

Apple II

Based on [Stephen A. Edwards Apple2fpga](#) and [vlait port for Papilio boards](#).

Some of its features are:

- Joystick Support (up to two fire buttons)
- RAM expansion cards. 128K Saturn RAM (slot 5) + 16K Language card (slot 0).
- VGA Scanlines
- Can change monitor between colour and monochrome

For more info check [ZX-Uno forum](#).

SD card formatting

The SD card needs an exclusive format, so it cannot be used with other cores. It's based on concatenating **NIB** disk image file data.

To convert disk images from other format (**DSK** or **D0**), you can use **dsk2nib** utility, available in [ZX-Uno SVN repository](#) (User **guest**, password **zxuno**) and [GitHub](#).



This process can't be undone, and it will remove any content that there was previously in the SD card.

Windows

Concatenate the disk images (with a maximum of 20) using **COPY**:

```
COPY /B image1.nib + image2.nib + (...) + image20.nib apple2_20discs.img
```

Dump the new file to the SD card, for example, using [HDD Raw Copy Tool](#).

MacOS and Linux

Concatenate the disk images (with a maximum of 20) using **cat**:

```
cat imagen.nib image2.nib (...) image20.nib > apple2_20discs.img
```

Dump the new file to the SD card, using **dd**:

```
sudo umount /dev/...
sudo dd if=apple2_20discs.img of=/dev/...
```

Keyboard

Special keys and buttons

While the core is running:

- **/** (numeric keyboard): Enable or disable scanlines on VGA
- ***** (numeric keyboard): Change between colour monitor and black and white
- **F1** to **F10**: Insert disk image between 1 and 10 from the SD. Press **F12** afterwards.
- **Shift+F1** to **Shift+F10**: Insert disk image between 11 and 20 from the SD. Press **F12** afterwards.
- **Ctrl+Alt+Backspace**: Hard reset. Backspace is the delete key, located in the top-right portion of the keyboard, above **Enter**
- **F12**: Soft reset.

Arcades

Originally made for [Zx-Uno Jamma Addon](#) (to connect inside an Arcade Machine), there are several [Arcade Game](#) cores. Afterwards, adapted versions compatible with joysticks (like ZXUNO+ VGA+DB9 addon) were made.

There are three types:

- Vertical (the original machine used a monitor rotated 90°)
- Inverted Verticale (the machine used a monitor rotated 270°)
- Horizontal (the original machine used a horizontal monitor)

You can obtain download links for the different versions and more detailed information at [ZX-Uno forum](#).

Take note that there is a vertical BIOS version, and a special [Spectrum ROM](#) to select and load the different Arcade Cores.

Keyboard

Special keys and buttons

Most of the cores have the same control keys and buttons.

Special keys that can be used while running the core:

- **1** and **2**: Player 1 and Player 2 Buttons
- **3** and **4**: Insert Coin
- Cursor keys (or joystick stick): Joystick
- **Z** and **X** (or joystick fire buttons): Fire Buttons
- **0**: When in a vertical core, enable or disable 90° rotation of directional controls
- **Scroll Lock**: Switches between composite and VGA video modes.
- **F10**: Soft Reset
- **Ctrl+Alt+Backspace**: Hard reset. Backspace is the delete key, located in the top-right portion of the keyboard, above **Enter**.

Atari 800XL

[Atari 800XL](#) was a personal computer made by Atari in the eighties.

This core has this features:

- 320K expanded memory
- Drive support through SD
- Cart support
- Composite video and VGA
- Scanlines (VGA mode)
- Atari joystick support

SD card

You need a SD card with the first partition in FAT32 format. A directory named `atari800` with two subdirectories: `rom` with ROMs to use (e.g: `ATARIXL.ROM`), and `user` with cart, disk files, etc. (e.g.: `ManicMin.xex`)

See the [corresponding section](#) for instructions of how to install the Atari 800XL core in ZXUNO+.

Keyboard


Special keys and buttons

While the core is running:

- `Scroll Lock`: change between RGB and VGA video mode
- `-`: Enable or disable scanlines in VGA mode
- `*`: Change machine type between PAL and NTSC
- `Ctrl+Alt+Backspace`: Hard reset.
- `F5: Help`
- `F6: Start`
- `F7: Select`
- `F9: Reset`
- `F11: Load a disk`
- `F12: Show or hide the configuration menu`
- The numeric keypad emulates a joystick, where `5` and `2` keys work as *down* direction and `0` is the fire button

Basic Guide

Pressing **F12** shows or hides the configuration menu. Cursor keys and **Enter** (or joystick and fire button) to select and choose menu options.

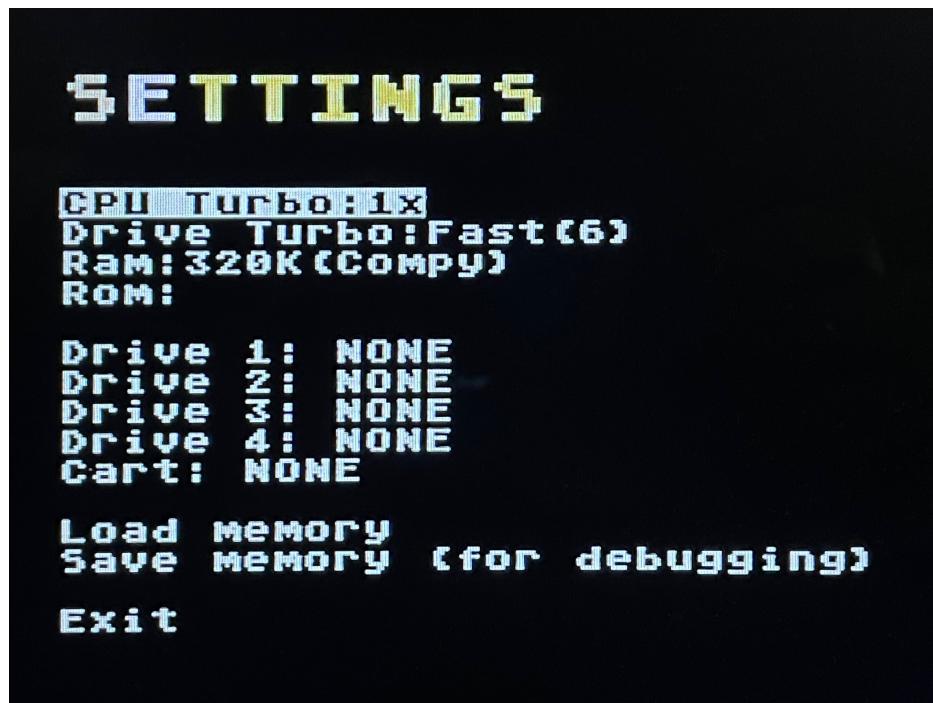

The following options are available:

- CPU Turbo
- Drive Turbo
- Ram
- Rom
- Drive 1
- Drive 2
- Drive 3
- Drive 4
- Cart
- Load memory
- Save memory
- Exit

Atari 2600

Atari 2600 is a home video game console originally branded as the Atari Video Computer System (Atari VCS).

ZXUNO+ core version is developed by Quest and DistWave.

Some of the features of the core are:

- RGB and VGA support
- Support for joysticks, keyboard, mouse and rotary encoder controls (see [here](#) for more information)

SD card format

You need a SD card with the first partition in FAT16 format to store ROM image files of games to load.

See the [corresponding section](#) for instructions of how to install the Atari 2600 core in ZXUNO+.

Keyboard

Special keys and buttons

During the core execution:

- **W, A, S, D** or joystick 1: Directional controls for player 1
- **F** or joystick 1 fire button: Player 1 fire button
- **I, J, K, L** or joystick 2: Directional controls for player 2
- **H** or joystick 2 fire button: Player 2 fire button
- **Scroll Lock**: change between RGB and VGA video mode
- **Ctrl+Alt+Backspace**: Hard reset.

Basic Guide

Pressing **Esc** or joystick button 2 shows or hides the configuration menu. Cursor keys and **Enter** to select and choose menu options.



The following options are available:

- Reset core
- Scanlines
- RGB Mode (PAL/NTSC)
- Color
- Difficulty A
- Difficulty B
- Select
- Start
- Load ROM
- Exit

BBC Micro

The [BBC Micro](#), was a series of microcomputers and associated peripherals designed and built by the Acorn Computer company in the 1980s for the BBC Computer Literacy Project, operated by the British Broadcasting Corporation.

The ZX-Uno core has been made by Quest y and enhanced after by azesmbog y hoglet.

Some of its features are:

- RGB and VGA (with optional scanlines) video output
- SD/MMC support, using [.MMB](#) files
- PS/2 keyboard
- Joystick support on port 1 (Emulating an analog joy)
- sn76489 sound chip implementation from [PACE project](#) (Programmable Arcade Circuit Emulation)

SD card format

An SD card with the first partition in FAT16 or FAT32 format is needed to load software. A special ROM inside the core (MMFS in the more recent core versions, Smart SPI on older ones) which reads a [BEEB.MMB](#) file with disk images inside.

The file must have the name [BEEB.MMB](#) and it has to be in the root directory. You can make one with [MMBIImager](#) for Windows, available at [ZX-Uno SVN Repository](#) (Usuario [guest](#), contraseña [zxuno](#)) or with MMB/SSD Utils in perl, available at Github [here](#) or [here](#).

The file has to be whole across the SD (not fragmented). You can use a program that can defrag files or FAT filesystems (like [Defraggler for Windows](#)) or use the following method:

1. Format the first SD partition using FAT16 or FAT32, but **NOT with quick format** (when using Windos, uncheck that option).
2. Copy [BEEM.MB](#) making sure it is the **FIRST file** being copied.
3. If you want you can add any other file to the SD (e.g. for using with other cores), but keep **ALWAYS BEEB.MMB** as the first file copied to the card.



Since the [MMB](#) file has the same name as the one for [Acorn Electron core](#), you can use another core with full access to the SD card (like a ZX Spectrum core with esxdos), with both [MMB](#) files with a different name, and then rename the one for BBC Micro as [BEEB.MMB](#) before running this core

Keyboard



Special keys and buttons

While the core is running:

- **Scroll Lock:** change between RGB and VGA video mode
- - (numeric keyboard): Enable or disable scanlines in VGA mode
- **F12:** Reset
- **Shift+F12:** Soft Reset trying to load automatically the selected disk at **BEEB.MMB**
- **Ctrl+Alt+Backspace:** Hard reset. Backspace is the delete key, located in the top-right portion of the keyboard, above **Enter**.

Basic guide



Once the SD card is inserted and the core running, if **BEEB.MMB** file was created correctly, on start, you should see:

```
BBC Computer 32k
Model B MMFS
BASIC
>
```

Or, for a core with Smart SPI

```
BBC Computer 32k
Smart SPI
BASIC
```

Disc 0 from the image file is mounted automatically, and you can see its contents using the command:

```
*CAT
```

To load, for example, a file name **MENU**, use the command:

```
*MENU
```

To show the list of available discs inside **BEEB.MMB** file:

*DCAT

To load a particular virtual disc:

*DIN discnum



Remember that, after inserting a disc, if it has automatic boot, you can start it pressing **Shift+F12**.

Computers Lynx

The [Lynx](#) was an 8-bit British home computer that was first released in early 1983 as a 48kB model. Several models were available with 48kB, 96kB or 128 kB RAM.

The ZXUNO+ core has these features:

- 48kB and 96 kB modes
- Optional Scorpion ROM
- Load from a external audio device
- Joystick support
- Only RGB/Composite Video out

SD card format

This core does not use the SD card


Keyboard

Special keys and buttons

While running the core:

- **F6**: Switch between 48kB mode and 96kB mode (default)
- **F7**: Enable or disable Scorpio ROM
- **F8**: Switch the option to consider port \$80 bits 2 and 3, so that Level 9 games are displayed properly.
- **Ctrl+Alt+Del**: Reset.
- **Ctrl+Alt+Backspace**: Hard reset. Backspace is the delete key, located in the top-right portion of the keyboard, above **Enter**.

Basic Guide

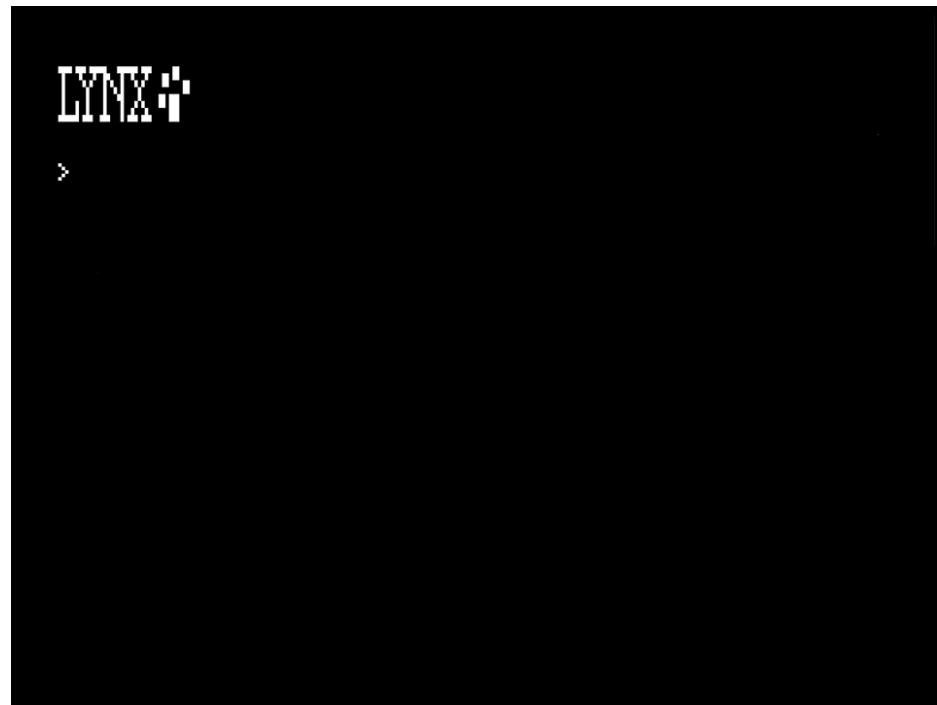

From within BASIC, you can load from a external tape (or [other external audio device](#)) with commands like:

```
TAPE n
LOAD "NAME"
```

Where **n** is a number (between 1 and 5), and **NAME** is mandatory, and the name of the program to load.

If you don't know the name to load, you can guess with the same command sequence, but writing **LOAD ""**.

Binary files are loaded with **MLOAD** instead of **LOAD**.



Maxduino, which is used in [miniduino](#) does not, at this moment, native support for Lynx tape files.

You can use programs like [Lynx2Wav](#) with Lynx **TAP** files. The resulting audio files can be embedded inside of TSX or TZX with tools like [MakeTSX](#) or [RetroConverter](#).

The [lince](#) script makes all this process easier, creating directly Maxduino **TZX** compatible files from Lynx **TAP** files.

CHIP-8

CHIP-8 is an interpreted programming language, developed by Joseph Weisbecker. It was initially used on the COSMAC VIP and Telmac 1800 8-bit microcomputers in the mid-1970s. Erik Bryntse later created another interpreter based on CHIP-8, called SCHIP, S-CHIP or Super-Chip which extended the CHIP-8.

The ZXUNO+ core is based on an existing [FPGA implementation](#) of the SuperChip.

There are several sites like [CHIP-8 Archive](#) or [Matthew Mikolay's CHIP-8](#) where you can obtain software for these machines.

SD card format

You can use a SD card with the first partition in FAT16 or FAT32 formats to store **BIN** or **CH8** ROM files to load with the core.

Keyboard

The CHIP-8 machine uses an hexadecimal keyboard as input. This is the key mapping:

Chip-8	PS/2
1 2 3 C	1 2 3 4
4 5 6 D	Q W E R
7 8 9 E	A S D F
A 0 B F	Z X C V


Special keys and buttons

While the core is running:

- **Esc**: Show or hide configuration menu
- **F11**: Hard Reset
- **F12**: Reset

Basic Guide

Pressing **Esc** shows or hides the configuration menu. Use the cursor keys and **Enter** to select and choose menu options.

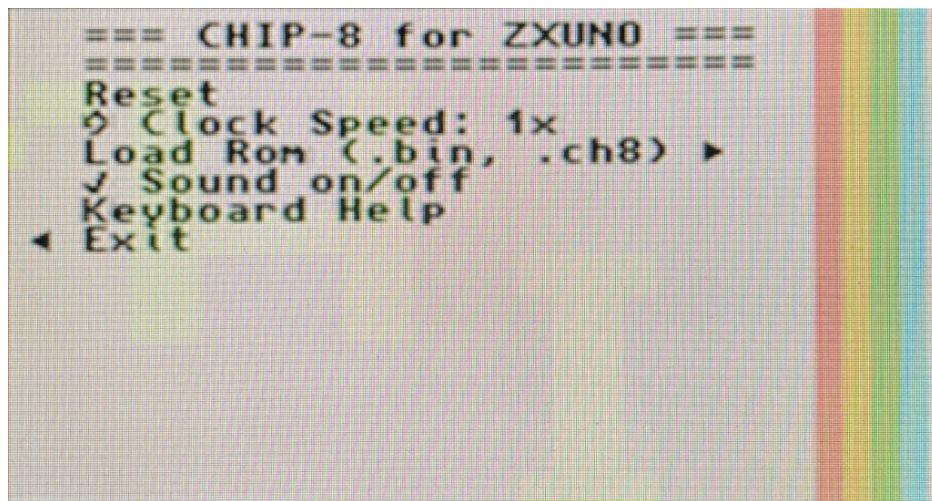

The following options are available:

- Reset the core
- Change the core clock speed
- Load a ROM file from the SD card
- Enable or disable sound output
- Help
- Exit the menu

ColecoVision

[ColecoVision](#) is Coleco Industries' home video-game console that was released in August 1982.

ZXUNO+ core is based on [Fabio Belavenuto's project](#).

Some features of this core are:

- BIOS ROM is loaded from SD card
- Supports multicart ROM, also loaded from SD
- Only works with VGA

SD card format

You need a SD card with the first partition in FAT16 format to store ROM image files of the games to load and other needed files. These can be downloaded from [the original project in GitHub](#).

See the [corresponding section](#) for instructions of how to install the ColecoVision core in ZXUNO+.

Keyboard

Special keys and buttons

While the core is running:

- Cursor or **Q, A, E, R** or joystick 1: Directional controls for player 1
- **Z** or joystick 1 main fire button: Fire Button 1 for player 1
- **U, J, O, P** or joystick 2: Directional controls for player 2
- **M** or joystick 2 main fire button: Fire button 1 for player 2
- **X** or joystick 1 secondary fire button: Fire button 1 for player 1 and player 2
- **0 to 9**: Button 0 to 9 for player 1 and player 2
- **T**: Button '*'
- **Y**: Button '#'
- 'Esc': Soft Reset

Basic Guide

On startup, BIOS ROM is loaded from the card, and then the multicart ROM.



At multicart menu, use the directional controls to choose one ROM, and then fire button 1 to load. Pressing 'Esc' restarts the core and loads the ROM selection menu again.

Colour Genie

The [EG2000 Colour Genie](#) was a computer produced by Hong Kong-based manufacturer EACA and introduced in Germany in August 1982.

The ZX-Uno version has been [developed by Kyp069](#) and has these features:

- 32K RAM
- Text and graphics modes
- RGB / Composite video output
- Tape loading using the audio input

SD card format

This core does not use the SD card.

Keyboard

The [Clear](#) key is not implemented.

Special keys and buttons

While the core is running:

- [Windows: MODSEL](#)
- [F5: NMI](#)
- [F11: Hard Reset](#)
- [F12 o Ctrl+Alt+Supr: Reset](#)

Basic Guide

On boot, a question is asked about the memory size. Usually, after pressing **Enter** the BASIC interpreter is started.




From BASIC, you can load software from a external tape (or [other external audio device](#)) with the following commands.

Use **CLOAD** and **Enter** to load BASIC programs. Once the load has finished, use the **RUN** command to start.

To load machine code, type **SYSTEM** and then **Enter**. Afterwards, type the first letter of the program name and **Enter** again. When loading finishes, if the program does not start automatically, type **/** and **Enter**.

While a program is loading one **and two *** are alternately displayed on the upper right corner of the screen.

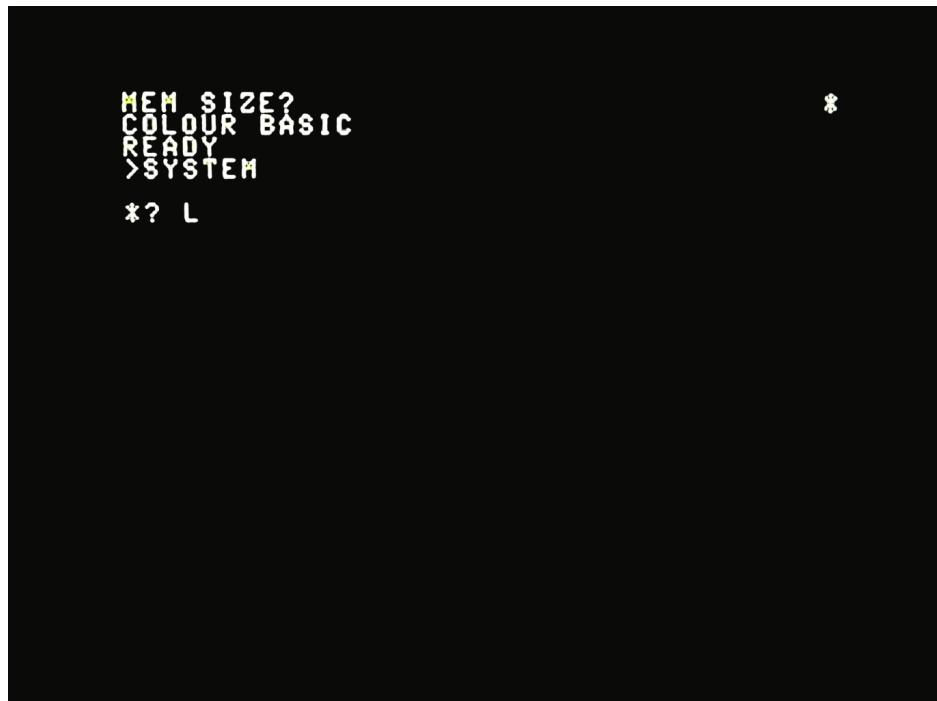

Commodore 16

The [Commodore 16](#) was a home computer made by Commodore International, released in 1984 and intended to be an entry-level computer to replace the Commodore VIC-20.

The ZXUNO+ core is based on [FPGATED project from István Hegedus](#), with some changes and upgrades, like loading tapes from audio sources.

Features:

- Commodore 16 PAL expanded to 64K RAM
- 1541 Floppy, redirected to SD RAW. Read only (.D64 image files)
- Chip TED from FPGATED
- Joystick support, DB9 connector and numeric keyboard emulation
- VGA 50Hz and RGB-Composite
- VGA Scanlines
- Tape loading using the audio input
- Audio input signal polarity change support
- ROM Kernel PAL -5 modded to avoid the key press between header loading while loading from tape
- Audio out mix including audio tape feedback and TED audio
- LED used as 1541 reading activity and audio input polarity status

SD card format

The SD card needs an exclusive format, which cannot be used with other cores. It's based on [D64](#) concatenated images, insed 256K blocks. Downloead the file [dummyto256.bin](#) available at [ZX-Uno official repository](#).

To include several [PRG](#) files inside a [D64](#) disk image file, you can use [DirMaster](#) for Windows, making an image with [FB16.PRG](#) as the first program (more info [at ZX-Uno forum](#)).



The SD RAW format is compatible with the one used with Commodore 64 core, so you can use the same card, including disk images for both systems.



This process can't be undone, and it will remove any content that there was previously in the SD card.

Windows

Concatenate the disk images using [COPY](#):

```
COPY /B imagen1.d64 + dummyto256.bin + imagen2.d64 + dummyto256.bin + (...)  
c16rawsd.img
```

Dump the new file to the SD card, for example, using [HDD Raw Copy Tool](#).

MacOS and Linux

Concatenate the disk images using [cat](#):

```
cat imagen1.d64 dummyto256.bin imagen2.d64 dummyto256.bin (...) > c16rawsd.img
```

Dump the new file to the SD card, using [dd](#):

```
sudo umount /dev/...  
sudo dd if=c16rawsd.img of=/dev/...
```

If it wasn't already, [install Commodore 16 core](#) into ZXUNO+.

Keyboard

Special keys and buttons

While the core is running:

- **Esc**: Esc
- **Tab**: RUN/STOP
- **Left Windows** = Commodore
- Numeric Keyboard: Emulated Joystick
- **F1** to **F3**: F1 to F3
- **Num Lock** or **F4**: HELP
- **Insert**: Select the first disk in the SD card
- **Page Up**: Select the next disk
- **Page Down**: Select the previous disk
- **Ctrl+Page Up**: Go 10 disks forward
- **Ctrl+Page Down**: Go 10 disks back
- **+**: Change audio input polarity
- **-**: Enable or disable scanlines in VGA mode
- **Scroll Lock**: change between RGB and VGA video mode
- **F11**: Change joystick between port 0 and port 1
- **F12**: Soft Reset
- **Ctrl+Alt+Backspace**: Hard reset.

Basic Guide



From within BASIC, you can load from a external tape (or [other external audio device](#)) with the command **LOAD**. Once it's finished, type **RUN** and press **Enter** if needed.

To show the contents of the current disk, press **F3** or use the command **DIRECTORY**. To load a file from disk use the command **DLOAD"<file name>"** and then, usually, **RUN**.

To load the first **PRG** file of a disk, press **Shift+TAB** or use the command **DLOAD"***.

Commodore 64

The Commodore 64, (C64, CBM 64/CBM64, C=64,C-64, VIC-641), was an [8-bit home computer introduced in January 1982 by Commodore International.

The ZXUNO+ core has been made by Quest.

Features:

- PAL Commodore 64 with 64K RAM
- 1541 Floppy, redirected to SD RAW. Read only
- Optional JiffyDOS either for the 1541 or for the Commodore 64. This speeds up loading
- SID sound chip
- Joystick support: physical (Atari, SMS, Megadrive...) and emulation with the numeric keyboard
- Switch VGA 50Hz / Composite-RGB
- VGA 50Hz and RGB-Composite
- VGA Scanlines
- Tape loading using the audio input
- Audio input signal polarity change support
- Modded kernel to avoid the key press after header loading when loading from tape
- LED used as 1541 reading activity

SD card format

The SD card needs an exclusive format, which cannot be used with other cores. It's based on [D64](#) concatenated images, insed 256K blocks. Downloead the file [dummyto256.bin](#) available at [ZX-Uno official repository](#).

To include several [PRG](#) files inside a [D64](#) disk image file, you can use [DirMaster](#) for Windows, making an image with [FB64.PRG](#) as the first program.



The SD RAW format is compatible with the one used with Commodore 64 core, so you can use the same card, including disk images for both systems.



This process can't be undone, and it will remove any content that there was previously in the SD card.

Windows

Concatenate the disk images using [COPY](#):

```
COPY /B imagen1.d64 + dummyto256.bin + imagen2.d64 + dummyto256.bin + (...)  
c64rawsd.img
```

Dump the new file to the SD card, for example, using [HDD Raw Copy Tool](#).

MacOS and Linux

Concatenate the disk images using [cat](#):

```
cat imagen1.d64 dummyto256.bin imagen2.d64 dummyto256.bin (...) > c64rawsd.img
```

Dump the new file to the SD card, using [dd](#):

```
sudo umount /dev/...  
sudo dd if=c64rawsd.img of=/dev/...
```

If it wasn't already, [install Commodore 64 core](#) into ZXUNO+.

Keyboard

Special keys and buttons

Durante la ejecución del core:

While the core is running:

- **Esc**: Start/Stop
- **Tab**: RUN/STOP
- **Alt** = Commodore
- Numeric Keyboard: Emulated Joystick
- **F1** to **F8**: F1 to F8
- **F9**: Pound symbol key
- **F10**: + symbol key
- **Insert**: Select the first disk in the SD card
- **Page Up**: Select the next disk
- **Page Down**: Select the previous disk
- **Ctrl+Page Up**: Go 10 disks forward
- **Ctrl+Page Down**: Go 10 disks back
- **+**: Change audio input polarity
- **-**: Enable or disable scanlines in VGA mode
- **Scroll Lock**: change between RGB and VGA video mode
- **End**: Change the colour palette
- **F11**: Change joystick port behaviour
- **Ctrl+F12**: Soft Reset to JyffyDOS mode
- **Ctrl+F12**: Soft Reset to original C64 ROM mode (to load from tape)
- **Ctrl+Alt+Backspace**: Hard reset.

Basic Guide



From within BASIC, you can load from a external tape (or [other external audio device](#)) with the command **LOAD**. Once it's finished, type **RUN** and press **Enter** if needed.

To show the contents of the current disk, press **Shift+Esc** or use the command **LOAD "*",8,1**. Once you see **READY** on screen, use the command **RUN**.

If the disk has more than one program, press **F1** or use the command **LOAD "\$"**. Then use the command **LIST** to see a list of the files in the disk.

Now, to load a specific file, use the command **LOAD "<name>",8** (where **<name>** is the name of the file to load). When you see **READY**, use the command **RUN**. Sometimes, this may not work, in this case, try to load with the command **LOAD "<name>",8,1**.

Commodore PET

The [Commodore PET \(Personal Electronic Transactor\)](#) was a line of personal computers produced starting in 1977 by Commodore International.

The ZX-Uno version has been [made by Jepalza](#), based on the [pet2001fpga](#) project.

Features:

- Tape loading using the audio input
- Only works on VGA

SD card format

This core does not use the SD card

Keyboard

Special keys and buttons

While running the core:

- **F1**: Cancel tape loading
- **Alt**: Type using graphic mode

Basic Guide



You can load from a external tape (or other external audio device) with the command **LOAD**. One it's finished, type **RUN** and press **Enter** if needed.



Maxduino, which is used in <<miniduino does not, at this moment, support for Commodore PET tape files.



You can use programs like [Audiotap](#) with Commodore **TAP** files.

Commodore VIC-20

The [Commodore VIC-20](#) (VC-20 in Germany and VIC-1001 in Japan) was an 8-bit home computer sold by Commodore Business Machines. The VIC-20 was announced in 1980, roughly three years after the Commodore PET.

The ZX-Uno version has been made by McLeod and Quest

Main features:

- 32K RAM expansion. It can be disabled for greater compatibility
- Tape loading using the audio input
- Audio input signal polarity change support
- Composite video and VGA support
- Joystick support

SD card format

This core does not use the SD card


Keyboard

Special keys and buttons

While the core is running:

- **F9** to **F11**: Load cartridges embedded in the core
- Numeric keyboard **-**: Change audio input polarity. The red LED is enable when inverted.
- **Scroll Lock**: To switch between composite video and VGA
- **F11**: Switch the joystick mapping between port 0 or port 1
- **Num Lock**: Reset disabling the 32K memory expansion (enabled by default)
- **F12**: Reset enabling the memory expansion
- **Ctrl+Alt+Backspace**: Hard reset. Backspace is the delete key, located in the top-right portion of the keyboard, above **Enter**

Basic Guide

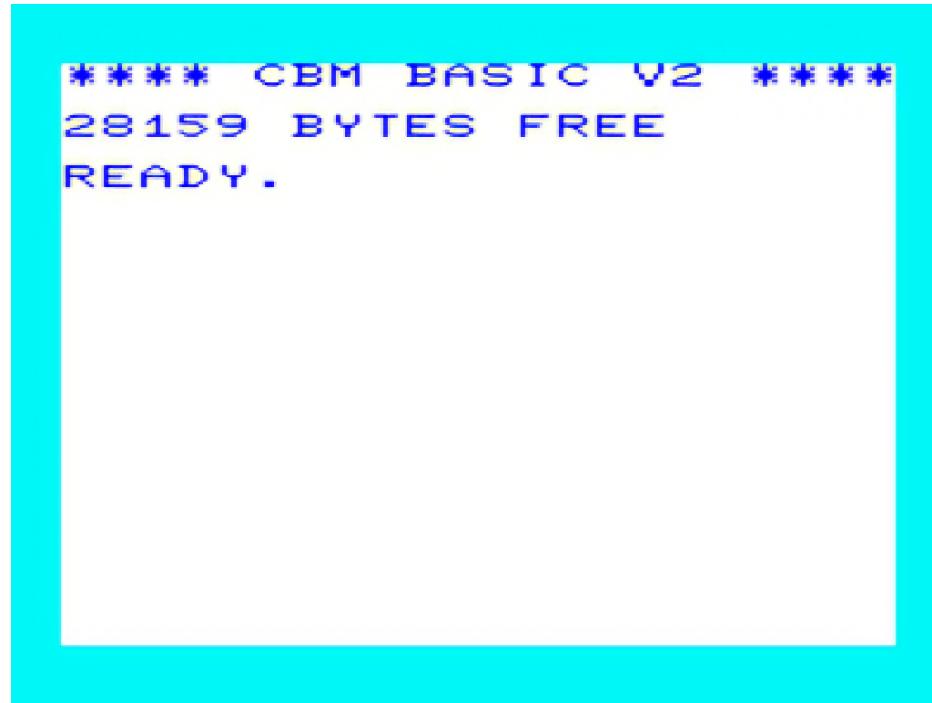

You can load from a external tape (or other external audio device) with the command **LOAD**. One it's finished, type **RUN** and press **Enter** if needed.



Maxduino, which is used in [miniduino](#) does not, at this moment, support for Commodore VIC-20 tape files.



You can use programs like [Audiotap](#) with Commodore **TAP** files.

Flappy Bird

[Flappy Bird](#) was very successful mobile game. The main goal is to control a bird, attempting to fly between columns of green pipes without hitting them.

The core has been made by azesmbog using the [work of Max Veerapat Kumchom](#), adapting the original code for the AEON Lite board to ZX-Uno.

Main features:

- Only VGA output
- It has to be controlled using a joystick

SD card format

This core does not use the SD card

Keyboard

This core does not use the keyboard. A joystick is needed in order to use it.

Special keys and buttons

While the core is running:

- **Joystick Up:** Restart the game
- **Joystick Down:** Master Reset
- **Joystick Fire:** Fly

Galaksija

Galaksija (Galaxy in english) is a build-it-yourself computer designed by Voja Antonić. It was featured in the special edition Računari u vašoj kući (Computers in your home, written by Dejan Ristanović) magazine, published 1984 in Yugoslavia.

The ZX-Uno core is a revision of the [μGalaksija project](#), improved by azesmog, whom added the Galaksija Plus mode, and the ability to load programs from the SD card.

ZX-Uno core features:

- Only VGA output
- Sound (optional)
- Program loading from the SD card
- Galaksija Clasic (minus) y Galaksija Plus modes

SD card format

You can use a SD card with the first partition in FAT16 format, where you can store program files, which you can get, for example at the [retrospec.sgn.net](#) web site.


Keyboard

Special keys and buttons

While the core is running:

- **F1**: Normal speed
- **F2**: 2x speed
- **F3**: 4x speed
- **F9**: Enable or disable sound
- **Esc**: Freezes a BASIC or machine code execution. Pressing again the same key, resumes the execution
- **Del**: Pauses a BASIC program execution while being pressed
- **End**: BREAKs a BASIC program execution
- **Shift.+M**: Enables plus mode in those programs that have the support (e.g. TETRIS.GTP)
- **M**: Gets back to normal mode from plus mode
- **F12**: Soft Reset
- **Ctrl+Alt+F5**: NMI
- **Ctrl+Alt+Supr**: Soft Reset
- **Ctrl+Alt+F12**: Master Reset

Basic guide



While in BASIC, you can enable the loading programs from the SD card with this command:

```
A=USR(&F000)
```

The, with commands like **CD <directory>** and **DIR** you can access the directory where there is the file to load. To load a file, you have to type the name, without the extension (e.f. for a file named **GAME.GTP** you have to type **GAME**). Once the program is loaded to RAM, you can start execution with **RUN**.

The core starts up in classic Galaksija mode (minus), but you can start the Galaksija Plus mod typing:

```
A=USR(&E000)
```

You can check the available BASIC commands [at Wikipedia](#).

HT-1080Z

The [HT-1080Z School Computer](#) was a hungarian computer which, basically, was a Video Genie clone, which in turn is a clone of the TRS-80 Model 1 with [Level II BASIC](#), with an added AY-3-8910 sound chip and additional input / output circuitry.

The core is based [Jozsef Laszlo's original work](#) for MiST, ported by azesmbog to the AEON development board, and now to ZX-Uno.

It's main features are:

- New 14K BASIC ROM, which can use lowercase with the Radio Shack Lower Case Kit
- Extra FF port, with a beeper
- Included SDOS v8.4 by PVV, to load [CAS](#) files from the SD card
- Composite video/RGB and VGA video output

SD card format

You can use a SD card with the first partition in FAT16 format, where you can store [.CAS](#) files, but with some limitations:

- Only machine code [CAS](#) programs. BASIC programs aren't supported
- In order to use [CMD](#) programs, they have to be converted previously to [CAS](#) with some utility like [trld](#), [trs80-tool](#) or [cmd2cas](#)
- SDOS only understands [CAS](#) binary format files (beysikovsky format is not supported)

You can obtain file conversion utilities at this sites:

<https://www.trs-80.com/wordpress/conversion-tape-utilities/>

<http://48k.ca/trld.html>

<https://github.com/pullmoll/cass80>

Keyboard


Special keys and buttons

While the core is running:

- **Ctrl+Alt+Backspace** : Master reset
- **Ctrl+Alt+Del** : Soft reset
- **F5** : Change ink colour
- **F6** : Change paper colour
- **F7** : Change border colour
- **F9** : Select 64 or 32 columns mode (only with VGA output)
- **F10: PAGE** key
- **Home: CLEAR** key
- **Scroll Lock**: Select between VGA and PAL mode.
- **Shift+0**: If **ULCBAS.CAS** has been loaded (Upper/Lower Case Driver) changes between only uppercase mode or uppercase and lowercase mode

Basic Guide

On startup, you are asked for the upper memory limit. Press **Enter** to continue.

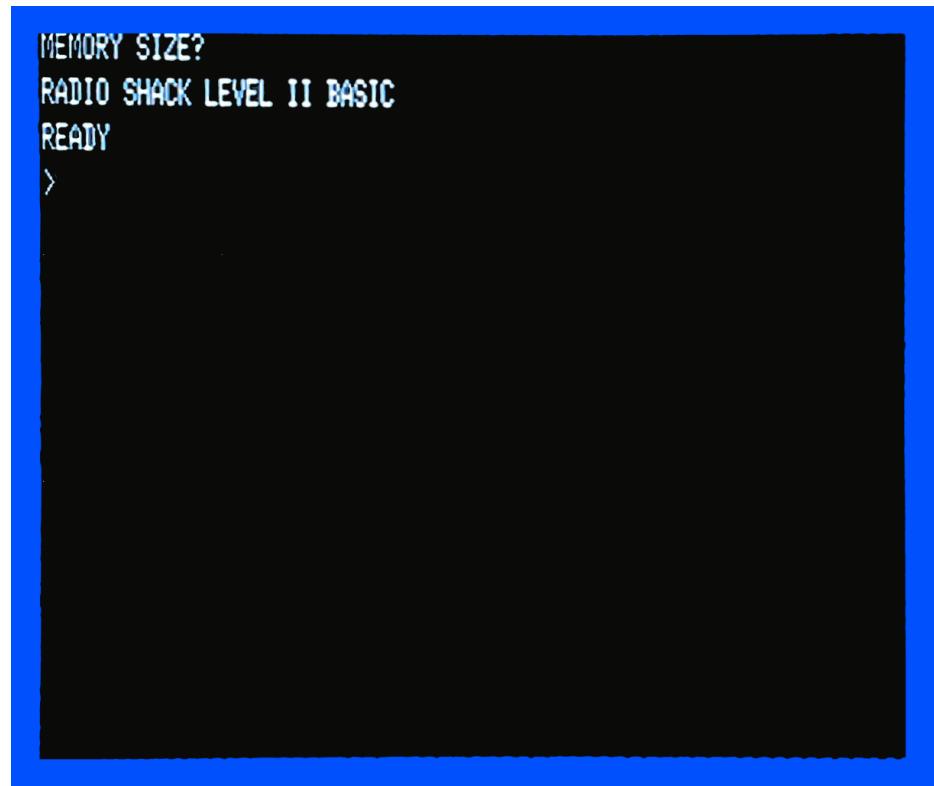


After the BASIC interpreter has loaded, if, for example, you type **PRINT MEM**, the available memory for BASIC will be displayed.

To load tape files from the SD card, you have to start SDOS typing

```
>SYSTEM  
*? /61440
```

or, if you don't want the screen to be cleared

```
>SYSTEM  
*? /61443
```

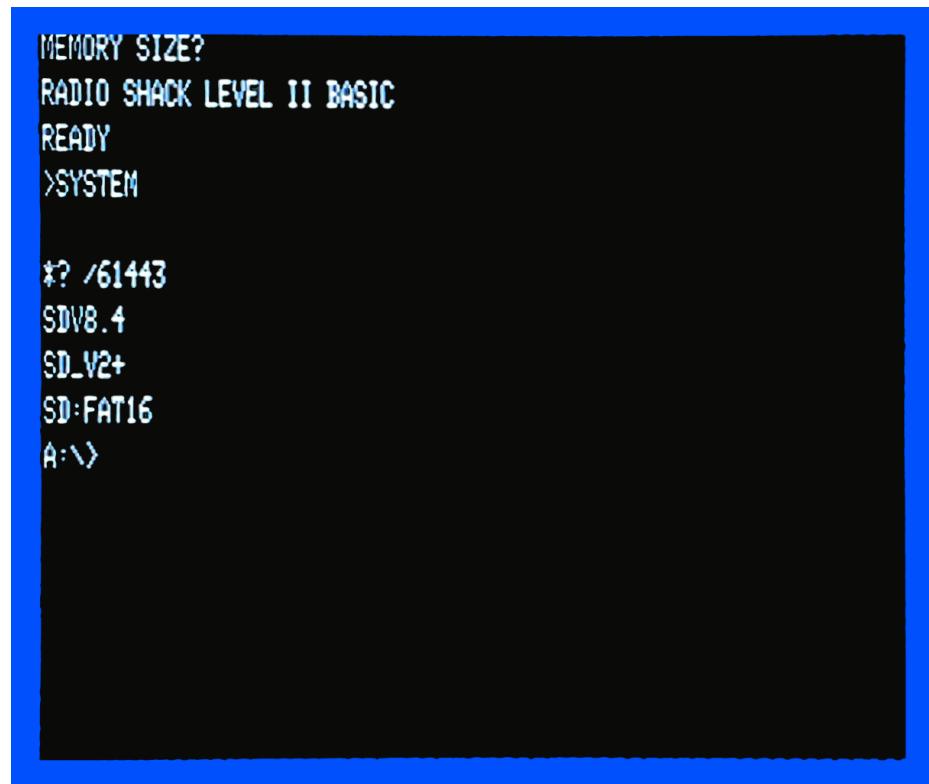

The screenshot shows a black terminal window with white text. At the top, it says "MEMORY SIZE?", "RADIO SHACK LEVEL II BASIC", and "READY". Below that, it says ">SYSTEM". Then there is a series of file system entries: "SD /61443", "SDV8.4", "SD_V2+", "SD:FAT16", and "A:\>". The background of the terminal window is black.

After that, with instructions like **CD** and **DIR** you can access where the **CAS** file to load is located. Then, to load a **.CAS** file, you only have to type the name, without extension (for example, for a file named **GAME.CAS** you have to type **GAME**).



All SDOS commands have to be typed in uppercase.



Pressing **Space** pauses the listing of files and directories, and pressing any other key afterwards, resumes it.



The included ROM has already implemented the Radio Shack Lower Case Kit. However, in order to use lowercase from BASIC, you must load from SD the Upper/Lower Case Driver (file **ULCBAS.CAS**).

Jupiter ACE

The [Jupiter ACE](#) was a british micro computer produced by Jupiter Cantab in the early 1980s.

The ZX-Uno core has been developed by McLeod and enhanced by Azesmbog, and has, amongst others, the following features:

- Tape loading using the audio input
- Tape loading from the SD card (with [SDOS](#))

SD card format

You can use a SD card with the first partition in FAT16 format, where you can store Jupiter ACE [.TAP](#) files, which you can get, for example at the [Jupiter ACE Archive](#) website.

Keyboard

Special keys and buttons

While the core is running:

- [F1](#) to [F4](#): Turbo Modes
- [F12](#): Soft Reset
- [Ctrl+Alt+F5](#): NMI
- [Ctrl+Alt+Supr](#): Reset
- [Ctrl+Alt+Backspace](#): Hard reset. Backspace is the delete key, located in the top-right portion of the keyboard, above [Enter](#)

Basic Guide

From within Forth, you can load from a external tape (or [other external audio device](#)) with the command **LOAD <nombre>**.



Jupiter ACE **TAP** files are different from the ZX Spectrum ones, so, to use them with a miniduino, they have to be converted previously to **TZX** with the [acetap2zx](#) utility available at [ZX-Uno repository](#) (User **guest**, password **zxuno**).

To load tape files from the SD card, you have to access first to SDOS typing

61440 call

After that, with instructions like **CD** and **DIR** you can access where the **TAP** file to load is located. Then, to load a **.TAP** file, you only have to type the name, without extension (for example, for a file named **GAME.TAP** you have to type **GAME**).



All SDOS commands have to be typed in uppercase.

Once the tape has finished loading, type the corresponding command to start the program.



Instead of BASIC like other systems, Jupiter ACE uses **Forth**. To see the commands currently available (including those that will start a program loaded from tape), you have to type **vlist**.

```

vlist
FORTH UFLOAT INT FNEGATE F/ F* F
+ F- LOAD BUVERIFY VERIFY BLOAD B
SAVE SAVE LIST EDIT FORGET REDEF
INE EXIT ." ( [ +LOOP LOOP DO UN
TIL REPEAT BEGIN THEN ELSE WHILE
IF J LEAVE J I' I DEFINITIONS V
OCABULARY IMMEDIATE RUNS> DOES>
COMPILER CALL DEFINER ASCII LITE
RAL CONSTANT VARIABLE ALLOT C'
CREATE : DECIMAL MIN MAX XOR AN
D OR 2- 1- 2+ 1+ D+ - + DNEGATE
NEGATE U/MOD */ * MOD / */MOD /M
OD U* D< U< <> = @> @< @= ABS O
UT IN INKEY BEEP PLOT AT F. EMIT
CR SPACES SPACE HOLD CLS ### U
. SIGN #> <# TYPE ROLL PICK OU
ER ROT ?DUP R> >R ! @ O! O@ SWAP
DROP DUP SLOW FAST INVIS VIS CO
NUERT NUMBER EXECUTE FIND VLIST
WORD RETYPE QUERY LINE ; PAD BAS
E CURRENT CONTEXT HERE ABORT QUI
T OK
■

```

MSX

MSX1FPGA is a project to clone MSX1 in FPGA. The original development is by Fabio Belavenuto and is available at [GitHub](#).

Some of its features are:

- MSX1 at 50Hz or 60Hz
- 128K Nextor (MSX-DOS2 evolution) ROM with SD driver
- Reconfigurable keyboard map
- Scanlines
- Joystick support

SD card format

You have to use a SD card with the first partition in FAT16 format with [code 0x06 \(16-bit FAT\)](#). You can also use a second FAT16 partition for MSX software, and leaving the first one only for the system startup.

You need to get:

- Basic SD project files SD [from GitHub](#)
- Nextor driver ([NEXTOR.SYS](#)) and ROM ([NEXTOR.ROM](#)) [also from GitHub](#)
- MSX1 ROM ([MSX_INT.rom](#), [MSX_JP.rom](#) or [MSX_USA.rom](#)) [at the same repository](#)

Copy the contents of the [SD directory](#) in the root of the first partition of the SD.

Copy [NEXTOR.SYS](#) to the same place.

Copy [NEXTOR.ROM](#) inside the [MSX1FPGA](#) directory.

Copy one MSX1 ROM ([MSX_INT.rom](#), [MSX_JP.rom](#) or [MSX_USA.rom](#)) inside the [MSX1FPGA](#) directory, but renaming it to [MSX1BIOS.ROM](#).

The file [/MSX1FPGA/config.txt](#) keeps the core configuration, using this format:

```
11SP01
|||||
|||||+-Scanlines: 1=Enabled, 0=Disabled
|||||---Turbo: 1=Initialize with turbo enabled
|||+---Colour System: N=NTSC, P=PAL
||+----Keymap: E=English, B=Brazilian, F=Frances, S=Spanish, J=Japanese
|+----Scandoubler(VGA): 1=Enabled, 0=Disabled
+----Nextor: 1=Enabled, 0=Disabled
```

If it wasn't already, [install MSX core](#) into ZXUNO+.

Keyboard

Special keys and buttons

While running the core:

- **Print Scr**: Changes between VGA and RGB mode
- **Scroll Lock**: Enables or disables scanlines
- **Pause**: Changes between 50Hz and 60Hz
- **F11**: Enables and disables turbo mode
- **Ctrl+Alt+Supr**: Soft Reset
- **Ctrl+Alt+F12**: Hard Reset
- **Ctrl+Alt+Backspace**: Restarts the FPGA
- **Left ALT**: MSX GRAPH
- **Right ALT**: MSX CODE
- **Page Up**: MSX SELECT
- **Home**: MSX HOME (**Shift+HOME**: CLS)
- **End**: MSX STOP
- **Ñ or Windows**: MSX DEAD



In BASIC use **CTRL+STOP** (**Ctrl+End**) keys to stop the execution of a program.



To change the video mode between 50Hz and 60Hz (and thus play at correct speed PAL games), you can use also use **DISPLAY.COM**, which can be downloaded [here](#).

Basic Guide

To go to BASIC from MSX-DOS you must execute **BASIC** command.



The screenshot shows the MSX BASIC version 1.0 startup screen. It displays the following text:
MSX BASIC version 1.0
Copyright 1983 by Microsoft
28815 Bytes free
Ok
■

At the bottom of the screen, there is a row of command names: color auto goto list run.

From within BASIC, you can load from a external tape (or [other external audio device](#)) with the commands **RUN"CAS:", BLOAD"CAS:", R** or **CLOAD**.



Loading from audio sources only works if turbo mode is disabled.

To go to MSX-DOS from BASIC, execute **CALL SYSTEM**.

MSXCTRL

An exclusive utility of MSX1FPGA core, which lets you control all the core options that were previously available only by editing the configuration file or with some key combination.

When running **MSXCTRL** all the use parameters are shown:

```
MSXCTRL.COM - Utility to manipulate MSX1FPGA core.
HW ID = 06 - ZX-Uno Board
Version 1.3
Mem config = 82
Has HWDS = FALSE
```

Use:

```
MSXCTRL -h -i -r -b -[5|6] -m<0-2>
         -c<0-1> -d<0-1> -t<0-1>
         [-w<filename> | -l<filename>]
         -k<0-255> -e<0-255> -p<0-255>
         -s<0-255> -o<0-255> -a<0-255>
```

MSXCTRL -h show help for a parameter. For example, **MSXCTRL -i** show the current configuration, **-t 1** sets turbo mode on, etc.

Other

There are different ways to load games depending on the kind of file: .CAS, .DSK o ROM (see [this ZX-Uno forums thread](#) for more info).

The spanish keymap officially available can be replaced with a better one. See [here](#) for more information.

MZ-700

The [MZ-700](#) was a personal computer sold by Sharp. It included keyboard and tape-based recorder in a single unit.

The ZX-Uno core has been made by jepalza, based on en [previous implementations](#).

Some features of the core are:

- Only VGA video mode output
- Tape loading using the audio input
- PS/2 keyboard support trying to mimic the original keyboard layout



Since it is an experimental core, there are some problems. For example, the SRAM tends to get corrupted after some time of use. At this moment, the best option is to turn off and on the ZXUNO+ when this happens



You can use the [mzf2wav](#) utility, available for Windows, and with source code valid for Linux and Mac, to convert [MZF](#) tape files to [WAV](#) and load them with a external audio device

There is more information and software at these sites:

<https://www.sharpmz.no>

<http://www.sharpmz.org/mz-700/monicmd.htm>

<http://www.sharpmz.org/mz-700/dldlang.htm>

<http://www.sharpmz.org/mz-700/dldgames.htm>

SD card format

This core does not use the SD card

Keyboard

The core tries to keep the original machine keys layout.

Special keys and buttons

While the core is running:

- **F1 to F5:** F1 to F5
- **Esc:** GRAPH
- **Tab:** ALPHA
- **Shift Lock:** CTRL
- **Shift:** SHIFT
- **Backspace:** BREAK
- **Enter:** CR
- **Insert:** INS
- **Del:** DEL
- **Cursor keys:** Cursor keys

Basic Guide

You **must** use two jump wires to expansion port pins **P58** and **P51**, both connected to **GND**:



The MZ-700 had switches to determine the tape status (PLAY) and the country code. The core uses EXT9(**P51**) for PLAY and EXT6(**P58**) for the country. They are both needed since there are some games that use the japanese character set (wire to **P58** **not connected**) or the european character set (wire to **P58** **connected**), and because the tape loading routines detect the status (**P51 not connected**, Stop mode, **P51 connected**, Play mode).

As a default **P58** **must** be connected to **GND**. You can turn it off for a japanese character set program.

Likewise, **P51** **must** be connected to **GND** to load from tape. Some programs need to disconnect it after finishing loading.

For most software, you can leave always connected both wires.

After startup the default MZ-700 ROM has a very basic monitor with a few commands, like LOAD (L), SAVE (S), DUMP (D), etc. Afterwards, you can load from tape machine code programs or a language interpreter (BASIC, Forth, Pascal) and then load a program in the selected language.

To load a tape from the monitor with a (u [external audio device](#)):

With, at least, P51 connected to GND, type L y Enter and the start the audio tape.



You can hear the audio while loading the tape. Take note, that, since the core isn't finished, there are many programs that do not work. Usually small programs load better.

NES

Nintendo Entertainment System (also known as Nintendo NES or just NES) is the [second home video game console produced by Nintendo](#).

The ZXUNO+ core has been made by [DistWave and Quest](#), based on [Ludde/Strigeus NES core forNexys4 board](#).

Some features of this core are:

- Only VGA video mode is supported, with non-accurate timings, so it may not work with some displays
- HQ2X filters that "removes pixels" from the image
- Scanlines simulation
- Made with NES NTSC clock timings, so only USA ROMs run fine. PAL ROMs run faster than they should
- You can load ROMs from the SD
- It uses all 512 KB ZXUNO+ SRAM. It's split into two 256 KB banks, uno for PRG_ROM and the other for CHR_ROM. So any ROM using more than 256 KB for CHR or PRG won't work. Obviously any ROM bigger than 512 KB won't work too.
- Joystick support

SD card format

You need a SD card with the first partition in FAT16 format to store ROM image files of the games to load. ROM files can be inside subdirectories.

See the [corresponding section](#) for instructions of how to install the NES core in ZXUNO+.

Keyboard


Special keys and buttons

While the core is running:

- **Esc** or joystick button 2: Show or hide configuration menu
- Cursor keys, and **Enter** to use the menu
- **Ctrl+Alt+Backspace**: Hard reset

Basic Guide

Pressing **Esc** or joystick button 2 shows or hides the configuration menu. To navigate the menu and activate or choose any option, use the cursor keys and **Enter**.

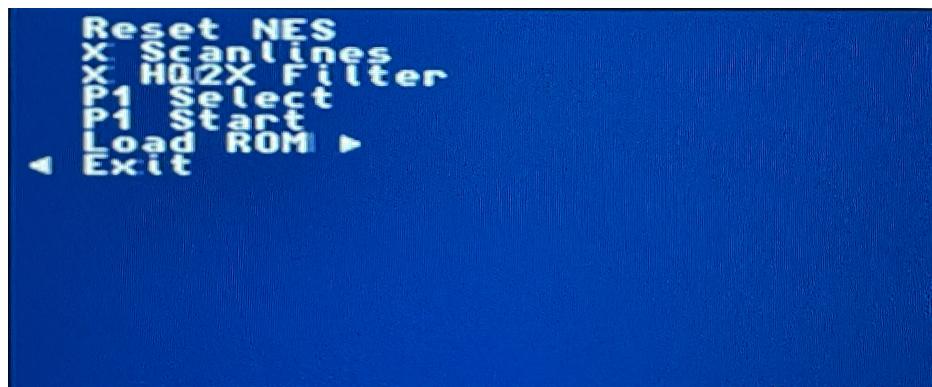

The following options are available:

- Reset NES
- Scanlines
- HQ2X Filter
- P1 Select
- P1 Start
- Load ROM
- Exit

Oric Atmos

The [Oric Atmos](#) was the name used by UK-based Tangerine Computer Systems for one 6502-based home computer sold in the 1980s, primarily in Europe.

The ZX-Uno core has these features:

- VGA / RGB video Out
- NMI
- DOS-8D (based on [Pravetz 8d](#), a bulgarian clone of Oric Atmos)

For more information, see [the ZX-Uno forum](#).

SD card format

The SD card needs an exclusive format, so it cannot be used with other cores. It's based on concatenating **NIB** disk image file data. To convert disk images from other format (**DSK** or **DO**), you can use [dsk2nib](#) utility (the resulting image files must be 232960 bytes long).



This process can't be undone, and it will remove any content that there was previously in the SD card.

Windows

Concatenate the disk images (with a maximum of 20) using **COPY**:

```
COPY /B image1.nib + image2.nib + (...) + image20.nib oric_discs.img
```

Dump the new file to the SD card, for example, using [HDD Raw Copy Tool](#).

MacOS and Linux

Concatenate the disk images (with a maximum of 20) using **cat**:

```
cat imagen.nib image2.nib (...) image20.nib > oric_discs.img
```

Dump the new file to the SD card, using **dd**:

```
sudo umount /dev/...
sudo dd if=oric_discs.img of=/dev/...
```

Keyboard

This is the keyboard layout:




Special keys and buttons

While the core is running:

- **Scroll Lock**: Change between RGB/Composite and VGA video mode
- **Home**: Show debugging data on screen (Current disk track -two digits-, disk image number -two digit-, and program counter -four digits-)
- **End**: NMI
- **Home+End**: Reset
- **Page Down**: Load the next disk
- **Page Up**: Load the previous disk

Basic Guide

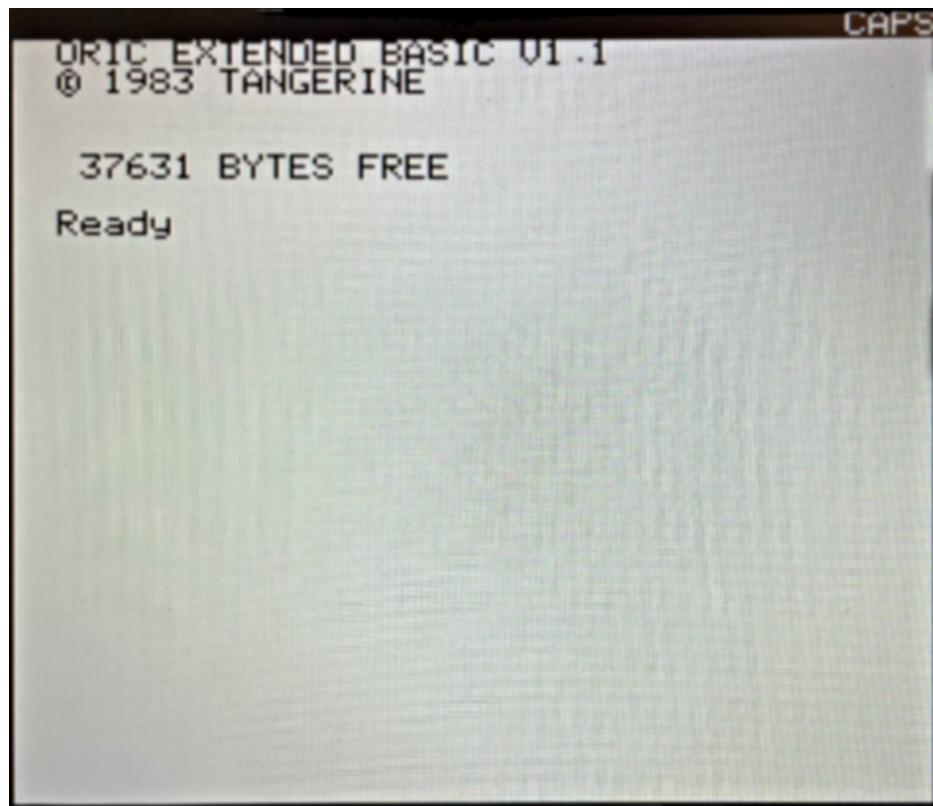

You can load and enable DOS-8D with the command:

```
CALL800
```

Then, you can show the files in the current disk with the **DIR** command.

To load and run a program, you have to type **-** and the name of the file. This way, for a program named **DEFENDER.EXE**:

```
-DEFENDER.EXE
```

Oric Atmos (Kyp)

A different core version of [Oric Atmos](#), based on Rampa's implementation for MiST, Mistica and SiDi.

It has the following features:

- VGA (Scandoubler) and composite video out
- 64KB RAM and 16KB ROM. The ROM hides the upper memory, but it can be accessed all the memory banks using machine code
- You can choose the ROM between the original version (1.1) and version 1.22
- Joystick directional controls are mapped to the cursor keys and both fire buttons to the keys **Space** and **S**
- Program loading using the audio input
- Program saving using the audio output

For more information check [RetroWiki forums](#).

SD format

This core does not use the SD card.

Keyboard

The keyboard layout tries to mimic as much as possible a real Oric Atmos.




Special keys and buttons

While the core is running:

- **F1** : Choose ROM 1.1
- **F2** : Choose ROM 1.22
- **F5**: NMI
- **F10**: Enable audio output when using **CSAVE**
- **Ctrl+Alt+Backspace** or **F11**: Hard reset. Backspace is the delete key, located in the top-right portion of the keyboard, above **Enter**.
- **Ctrl+Alt+Del** or **F12**: Soft reset
- **Scroll Lock**: Selects between VGA and composite video modes
- **Alt Gr.**: **FUNC** key
- **Esc**: **ESC** key
- **Del**: **DEL** key
- **Ctrl**: **CTRL** key
- **Shift**: **SHIFT** key
- **Left Windows, Left Alt, Right Windows, Menu**: Cursor keys **Left, Down, Up, Right**

Basic Guide

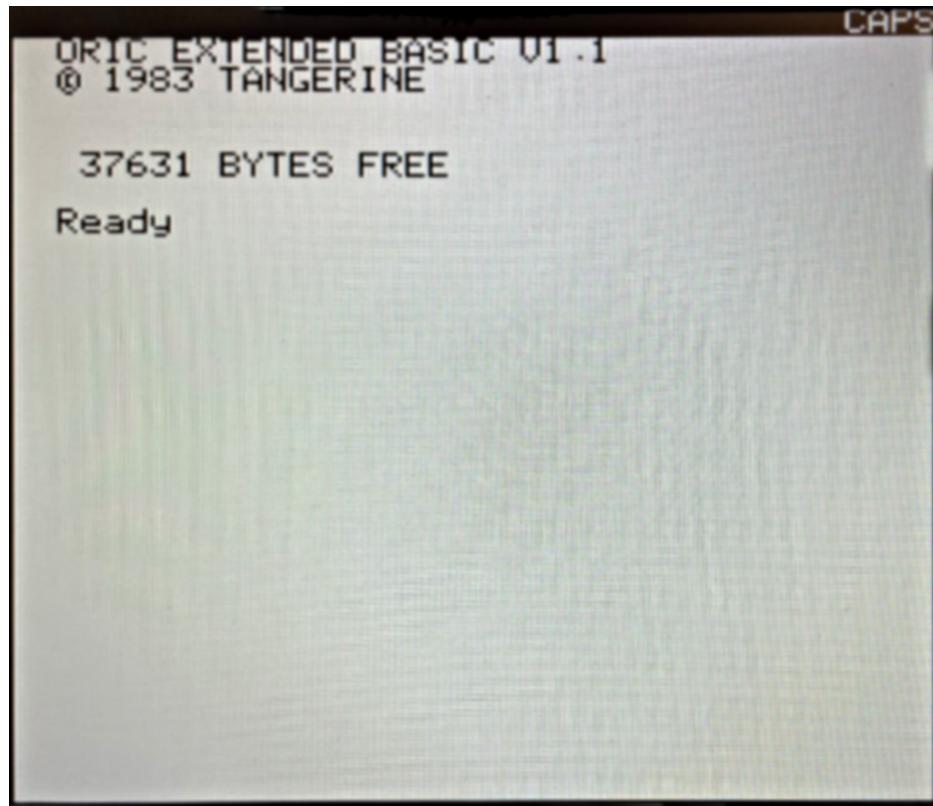

From BASIC, you can load software from a external tape (or [other external audio device](#)) using the command **CLOAD** and **Enter**. A message will show on screen

Searching...

When a program is detected loading, the text changes to

Loading...<program name>

There's a script named [calorico.sh](#) at [RetroWiki forums](#), made with bash, PHP and [TSXphpclass](#) utilities from [Natalia Pujol](#) to convert Oirc .TAP files into .TSX.



To save a BASIC program using the audio output, you can use the command **CSAVE "NAME"** and **Enter**. To hear the sound while recording, you must enable previously the audio output using the **F10** key.



Do not keep enabled the recording sound (**F10** key) while loading from a external audio source. This is because the recording sound creates a feedback whith a high pitch sound which breaks loading from audio.

Pong

Pong was [one of the earliest arcade video games](#) manufactured by Atari.

The latest ZX-Uno core has been made by avlixa, and some of its features are:

- Two different video modes: Composite Video/RGB and VGA
- 7 game variants
- Support for 2 or 4 players
- Support for Joysticks, keyboard, mouse and rotary encoder controls (see [here](#) for more information)
- Several colour modes

SD format

This core does not use the SD card.

Keyboard


Special keys and buttons

While the core is running:

- **Esc** or joystick button 2: Show or hide configuration menu
- **Ctrl+Alt+Backspace**: Hard reset
- **Scroll Lock**: switch between VGA and RGB mode
- **F3** o **F12**: Restart game
- Number between **1** and **7**: Change the game variant
- Joystick 2 (right): Control right pad (Player 1).
- Joystick 1 (left): Control left pad (Player 2)
- **Cursor up** and **Cursor down** or **O** and **K**: Control right pad (Player 1 in 2 player mode and player 3 in 4 player mode)
- **Q** and **A**: Control left pad (Player 2 in 2 player mode and player 4 in 4 player mode)
- **Z**, **M** or joystick button 1: Manual serve
- Cursor keys and **Enter** to use the menu

Basic Guide

Pressing **Esc** or joystick button 2 shows or hides the configuration menu. Cursor keys and **Enter** to select and choose menu options.

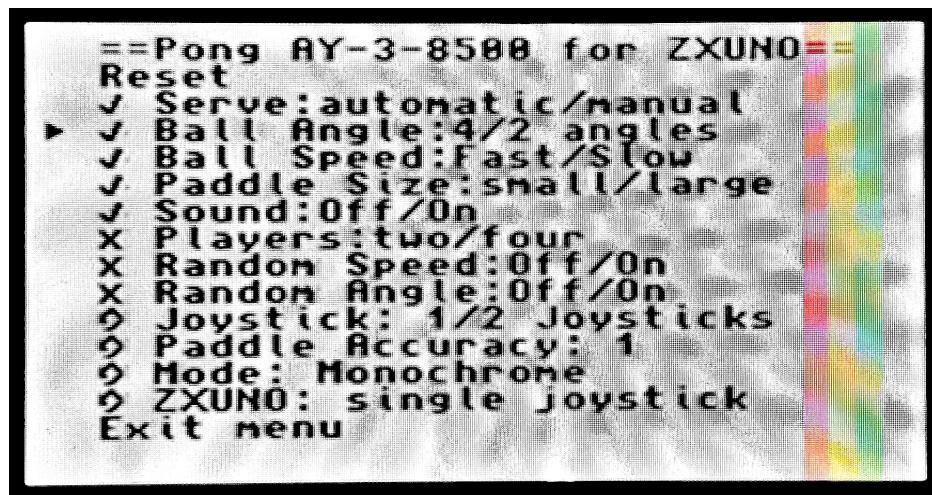

The following options are available:

- Serve mode
- Ball Angle
- Ball Speed
- Paddle Size
- Sound
- Number of players
- Speed mode
- Angle mode
- Joystick, mouse, etc. controls
- Paddle accuracy
- Colour mode
- Exit

PC XT

[Next186lite](#) core is an implementation of [Next186](#) core for FleaFPGA and Papilio Pro, pero adapted and trimmed.

Features:

- Only works on VGA out
- Next186 core at 25 MHz and 50 MHz system bus. Te processor is 286 equivalent in real mode. There's no protected mode.
- 504 KB conventional RAM
- 60 KB VRAM
- PS/2 keyboard and mouse support
- 80x25 text mode
- EGA 320x200x16 and MCGA 320x200x256 graphic modes, partially functional (MCGA mode does not draw the last lines on screen because 2.5 KB video RAM is missing). No graphic card is being emulated
- Beeper Sound and Tandy 3 voice
- Parallel DAC port to play digital sound

SD card format

You have to use a SDHC card, with the first partition with MS-DOS (or similar) installed. You can achieve this using, for example, virtualization software and connecting directly de SD card device as a hard disk. You can also find several pre-made images at [ZX-Uno forum page](#).

See the [corresponding section](#) for instructions of how to install the PC XT core in ZXUNO+.

SAM Coupé

The [SAM Coupé](#) was an 8-bit British home computer that was first released in late 1989. It was designed to have compatibility with the Sinclair ZX Spectrum, but in 48K mode only.

The ZX-Uno cores has these features:

- VGA (con scanlines) and RGB / Composite Video Out
- Full keyboard support
- SAA1099 sound
- Software loading via ZXUNO+ audio in port

SD card format

This core does not use the SD card

Keyboard

Special keys and buttons

While the core is running:

- **Ctrl+Alt+F5**: NMI.
- **Ctrl+Alt+Supr**: Soft reset.
- **Ctrl+Alt+Backspace**: Hard reset. Backspace is the delete key, located in the top-right portion of the keyboard, above **Enter**.

Basic Guide



You can only load software from a external tape (or from [other external audio device](#)) with the command **LOAD""** (or pressing **7** of the numeric keyboard, which is like pressing **F7** of the SAM Coupé keyboard).



At ZX-Uno SVN repository ([here](#) - User **guest**, password **zxuno**) you can find several programs adapted to TZX tape file.

Sega Master System

The [Sega Master System](#) was a video game console manufactured by Sega.

The ZX-Uno core is based on [Ben's original work for Papilio Plus](#).

Some of the core features are:

- VGA and Composite or RGB video output with PAL sync (50Hz)
- Joysticks support
- Joystick emulation via keyboard
- Loading cartridge image files from the SD card

SD card format

You need a SD card with the first partition in FAT16 format to store [BIN](#) or [SMD](#) image files of the games to load. ROM files can be inside subdirectories.

See the [corresponding section](#) for instructions of how to install the Sega Master System core in ZXUNO+.

Keyboard

Special keys and buttons

Durante la ejecución del core:

- Cursor or [Q, A, O, P](#) or joystick 1: Directional controls for player 1
- [Z, Windows](#) or joystick 1 main fire button: Fire Button 1 for player 1
- [X, Space](#) or joystick 1 secondary fire button: Fire button 1 for player 1
- [Pause](#): Master System pause button
- [Scroll Lock](#): Change between RGB/Composite and VGA video mode
- [Ctrl+Alt+Backspace](#): Hard reset
- [F12](#): Reset and show the file selection menu

Basic Guide

Pressing F12 shows or hides the file selector. Use the cursor keys and Enter to load the selected file.



SmartROM

SmartROM is a kind of firmware that allows to load different ROMS for implementations of the ZX-Uno core in FPGA boards without flash memory, or where the flash memory cannot be used by the ZX-Uno core.

SD card format

The card has to be formatted [the same as when preparing for the main Spectrum core](#) with, at least, one FAT16 or FAT32 partition.

Also, you have to install [esxdos 0.8.8](#) to the card, and create a directory named [ZXUNO](#) with, at least, the [SMARTROM.ZX1 file](#) and a RomPack file named [ROMS.ZX1](#) inside.

Finally, if your PS/2 keyboard is not in Spanish, you can copy the corresponding [keyboard map file](#), renamed as [KEYMAP.ZX1](#).

See the [corresponding section](#) for instructions of how to install the SmartROM core in ZXUNO+.

Vectrex

The [Vectrex](#) was a vector display-based home video game console. It also had an integrated monochrome CRT monitor.

The ZX-Uno core is based on [DarFPGA` s original work](#).

Some of its features are:

- VGA video out
- OSD Menu
- Joystick and keyboard controls
- Maximum supported ROM size: 8K

SD card format

You need a SD card with the first partition in FAT16 or FAT32 format to store **BIN** or **VEC** files of the software to load. Those files can be inside subdirectories.

At [archive.org](#) you can obtain software for Vectrex.

See the [corresponding section](#) for instructions of how to install the Vectrex core in ZXUNO+.

Keyboard


Special keys and buttons

During the core execution:

- Cursor or joystick: Directional controls
- **Z**: Fire button 1
- **X** or main joystick button: Fire button 2
- **C** or secondary joystick button: Fire button 3
- **V**: Fire button 4
- **Esc**: Show or hide the menu
- **Ctrl+Alt+Backspace**: Hard reset
- **F12**: Reset

Basic guide

By default, Vectrex starts with the built in game (Mine Storm).

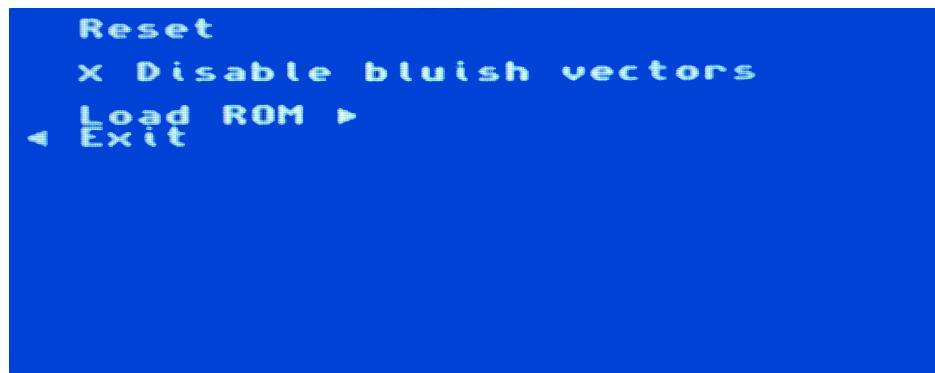

Pressing **Esc** shows or hides the configuration menu. Cursor keys and **Enter** are used to select and choose menu options.

The following options are available:

- Reset core
- Disable bluish color and enable white color for vectors
- Load ROM file from SD
- Exit the menu

Videopac

Philips [Videopac](#), also known as Magnavox Odyssey², Philips Videopac G7000 o Philips Odyssey², is a second generation home video game console that was released in 1978.

The ZXUNO+ core is made by avlixa, and is based on ZX DOS core by yomboprime.

Some features of the core are:

- RGB and VGA support
- Needs at least one joystick to be used
- Different colour modes including monochrome
- loadable VDC ROM charset for some custom ROMs

SD card format

You need a SD card with the first partition in FAT16 format to store ROM image files to load.

See the [corresponding section](#) for instructions of how to install the Videopac core in ZXUNO+.

Keyboard


Special keys and buttons

During the core execution:

- **Scroll Lock**: Change between RGB/Composite and VGA video mode
- **F2**: Switch between RGB and Composite when not in VGA video mode
- **F3**: Reset
- **Ctrl+Alt+Backspace**: Hard reset
- After loading a ROM, most games will prompt the user with "SELECT GAME". Press **0-9** on the keyboard or mapped controller button to play the game.
- **Esc** or joystick button 2 to show or hide the options menu
- **W, A, S, D** or cursor keys and then **Enter** to choose and select menu options

Basic Guide

Pressing **Esc** or joystick button 2 shows or hides the configuration menu. Cursor keys and **Enter** to select and choose menu options.

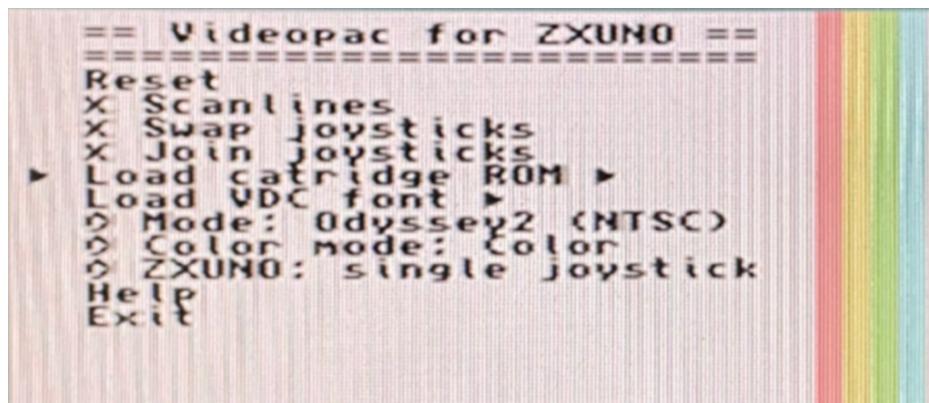

The following options are available:

- Reset core
- Scanlines
- Swap Joysticks
- Join Joysticks
- Load Cartridge ROM
- Load VDC Font
- Video mode: PAL/Videopac or NTSC/Odyssey2
- Color Mode
- Exit



Note also that the system did not have a well defined player 1 or player 2 controller, and some games may alternate on a game-to-game basis. You may need to swap controllers to use the input or (for one player games) use the join joystick option of the menu



Usually, there is no on-screen display of the game options, so looking at the instruction manuals (for example following [this link](#)) may be helpful in selecting a game.



If, when browsing the ROM directory, you can't see all of them, try to split the content into several subdirectories with less files per directory.

Change VDC ROM charset

You can, for some ROMs, load a **CHR** file including a custom font, instead of the original one which was included with the Intel 8244/8245 chip.

Those files can be made following the instructions and using the editor available at the project repository, following [this link](#).

ZX81

The **ZX81** was a home computer produced by Sinclair Research, designed to be a low-cost introduction to home computing for the general public.


The ZXUNO+ version has been [made by Jepalza](#) based on a previous **ZX97** implementation.

SD card format

This core does not use the SD card

Keyboard

The keyboard isn't mapped and the original machine keys layout is kept. For example, to obtain a `"` you have to type **Shift+P** or **Shift+0** to delete.

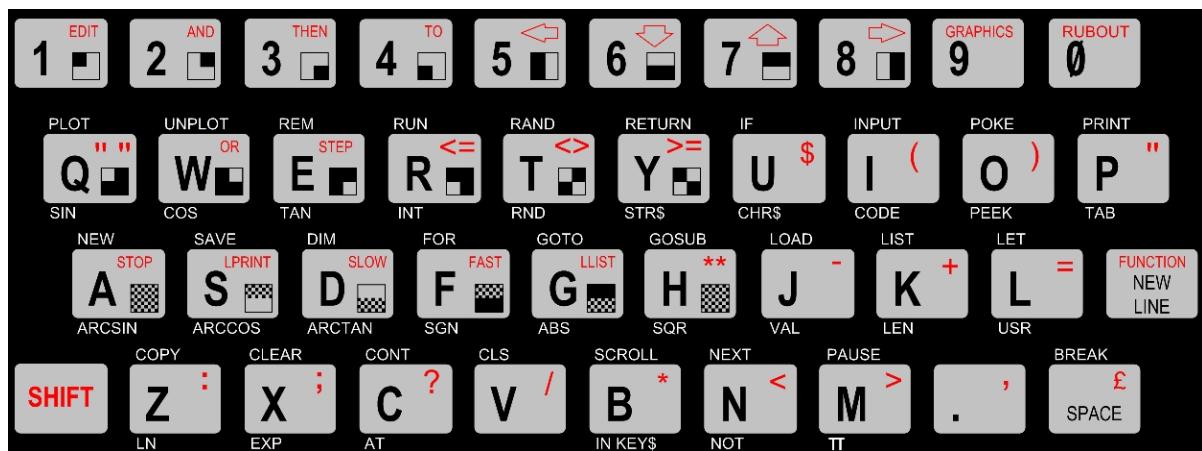

Basic Guide

You can load a external tape (or from [other external audio device](#)) with the command **LOAD ""**. Take note, that, while loading, the video output is disabled and, unlike the original machine, you can hear the loading sound.



Some monitor stop playing audio if the video signal is lost. It's recommended to plug headphones or a external speaker if you want to hear the sound while loading a tape.

Other Hardware

Rotary Encoders

The Pong core supports the use of quadrature [rotary encoders](#) as control devices. They can be connected to joystick ports. Although the testing has been done with 600 ppr encoders, lower ppr encoders, like 400 or 300, should also work.


You can also use an Atari 2600 [paddle](#) driving controller. In this case the playing experience is bad, since they have few ppr and you must do several full rotations. When using them, it's recommended to set the accuracy setting to 8, to have enough speed.

Connection

The joystick adapter must have pin 5 connected to positive VCC, used as main power, and pin 8 as GND. The rotary encoders to use must support voltage from 3,4v to 5v.

A rotary encoder has 5 wires: Earth Ground (not connected), Vcc (+), GND ([0V](#)'or '[-](#)), A and B.

[A](#) and [B](#) are connected to pins 1 and 2 for the first encoder, 3 and 4 for the seconde one. This way you can have up to 4 encoders connected using both joystick ports.

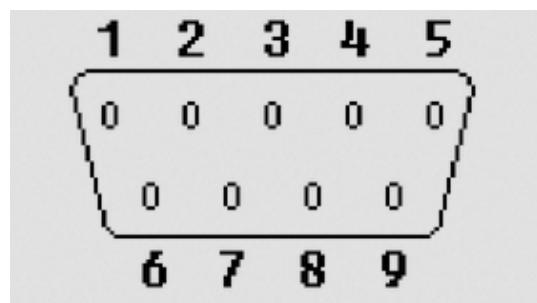

This way, the connections should be:

1. Line [A](#) encoder 1
2. Line [B](#) encoder 1
3. Line [A](#) encoder 2
4. Line [B](#) encoder 2
5. Vcc([+](#))
6. Fire 1
7. NC
8. [GND](#)
9. Fire 2

Pong Core Configuration

Follow these directions to choose the configuration:

- For 1 or 2 encoders on joystick port 2 de joystick, select **1/2 Paddle in J2** option
- For 2 encoders, one for each joystick port, select **2/4 Paddle in J1&J2** option. This is also valid to connect two Atari 2600 driving paddles
- For 4 encoders, two for each joystick port, select **2/4 Paddle in J1&J2** option
- For 1 or 2 encoders on joystick port 2 along with a mouse (in this case the encoders are for players 2 and 4), select **Mouse PS/2** option

It is recommended to wait, and make the connection after selecting the chosen option, since the encoders interfere with the up/down directions of the joystick, blocking access to the menu. Another option is to add a on/off switch for the encoder that will disable the power.

Loading from tape

Some cores can load, as the original machines could, from a external audio device like a cassette player or something else simulating it.

Besides the card, you have to plug an appropriate audio cable to [ZXUNO+ audio input](#). It must have a 3.5 mm stero jack on one side, and two mono outputs on the other side (one for each audio channel). The right audio mono is connected to the audio player (this is not necessary with a miniduino, since it already uses only the right audio channel when playing).

Cassette Player

The use is exactly the same as when using the original computers:

1. Plug the audio cable
2. Type on the computer or select the tape loading option. For example, for ZX Spectrum 48K, typing **J**, then, twice, **"** and then **Enter** to do the classic **LOAD "" + Enter**
3. Start playing the tape (you may have to try several times adjusting the player volume)

Computer

Depending on the operating system (Windows, MacOS, Linux) there are several programs that can either play a tape file ([TAP](#), [TZX](#), [PZX](#), etc.) and output the sound through a headphone output, or create an audio file ([WAV](#), [VOC](#), [AU](#), etc.) that can be played using a music or audio program.

PlayTZX

This program for Windows, MacOS or Linux, can play directly a [TZX](#) tape file through the audio output of the computer.

You can download the binary file (for example), for Windows from [World of Spectrum Classic](#) and for Mac from [this GitHub repository](#)) or compile the source code as [explained later](#).

1. Plug the audio cable between the computer audio output and ZXUNO+ audio input (remember to use only the right mono channel to the PC, Mac, etc. output)
2. Type on the computer or select the tape loading option. For example, for ZX Spectrum 48K, typing **J**, then, twice, **"** and then **Enter** to do the classic **LOAD "" + Enter**
3. Start playing a tape file with this command (you may have to try several times adjusting the player volume)

```
./playtzx <tape file path>
```

If everything works fine, you will see at the shell the name of the different tape data blocks, while the sound is played and the ZXUNO+ core loads the program.



On Linux, the program uses as output the device `/dev/dsp`, this may require to load a module like `snd_pcm_oss` (on systems using ALSA).

Compile source code (MacOS or Linux)

To compile, the first thing is checking that the developer tools are installed on the system, including a C compiler (`gcc`, `clang`, command line developer tools for Mac, etc.) and [GNU Autotools](#).

Download the source code [from this repository](#), extract the contents if needed and access from a terminal to the directory and type the commands:

```
aclocal && autoconf && autoheader && automake --add-missing  
./configure  
make
```

If all goes well, a new file named `playtzx` will be created, which you can copy anywhere and then use. You can delete the compilation directory.

Mobile phone, tablet, MP3 player, etc.

There are a very few apps (or none) that can directly play a tape file on a mobile device so, in many cases, the only option is to convert it to an audio file before playing it.

[PlayZX](#) is an App for Android which can play tape files through the headphone output.



The latest devices with headphone output are normally designed to work with impedances of only a few ohmis. This may, sometimes, not be enough for the ZXUNO+ audio input.

In these cases, it's recommended (if possible) to disable headphone volume limitations and/or use a headphone amplifier that can give a higher impedance.

Audio file conversion

These are some of the many programs that exist and which can export tape files to audio files.

[Tapir](#) is a GUI program for Windows (but which can also run with Wine on Linux or Mac) that can load [TZX](#) and [TAP](#) files and export to [WAV](#) audio.

[tape2wav](#) from [Fuse Utilities](#) is a command line utility that can export from [TZX](#) [PZX](#) and [TAP](#) to [WAV](#).

[pzx2wav](#) in [PZX Tools](#) is another command line utility which exports to [WAV](#).

[tsx2wav](#) in [TSXphpclass](#) is made with PHP and that can export from [TSX](#) to [WAV](#).

[Audiotap](#) is a graphical interface program made for Windows (but also working on Wine) that can convert Commodore [TAP](#) files to [WAV](#) audio files.

[Lynx2Wav](#) is a program that can convert Computers Lynx [TAP](#) files to [WAV](#) audio.

[2lynx2wav](#) also can convert Computers Lynx [TAP](#) files to audio files.

[cgc2wav](#) can convert EACA Colour Genie [CAS](#) files to [WAV](#) audio.

[castool](#), available with [MAME](#) can convert many kinds of tape file data to [WAV](#) audio.


[mzf2wav](#) converts [MZF](#) tape files to [WAV](#).

Miniduino

Miniduino is a tape file audio player, based on a STM32F103C8T6 microcontroller or ATMega38P, and **Maxduino** firmware preinstalled.

Maxduino plays, in a very similar way to how **cassette tape** players worked, digital tape files in format as like **TAP** and **TZX** (ZX Spectrum), **O** (ZX80), **P** (ZX81), **CDT** (Amstrad CPC), **CAS**(MSX) **TSX** (MSX, Acorn, etc). It is also possible to play AY music files as if they were tapes, in order to load them from **SpecAY** in a ZX Spectrum.

Ports and buttons

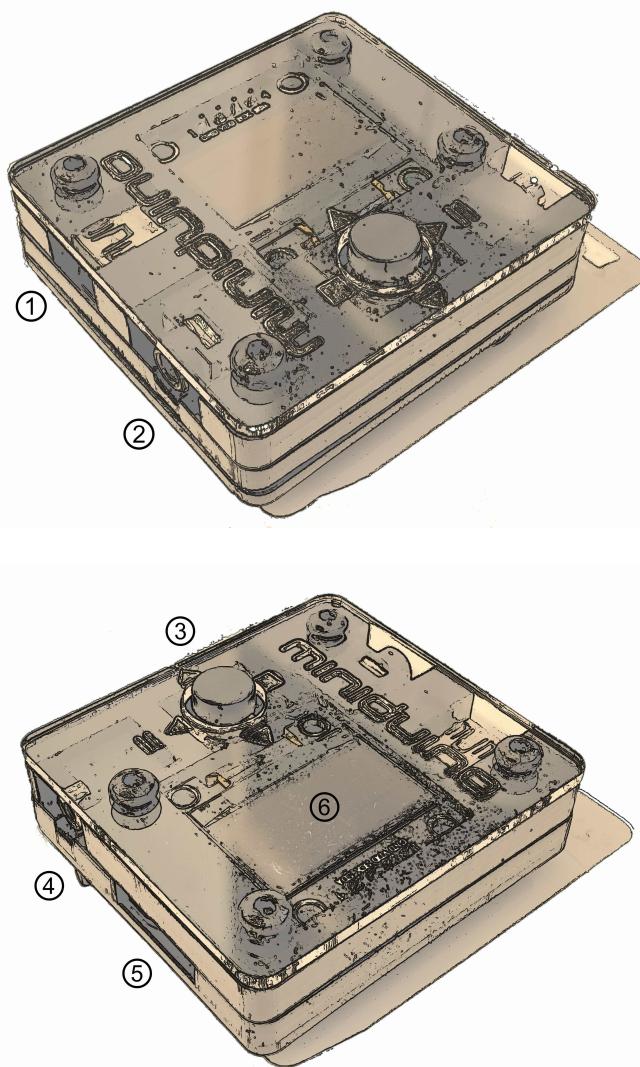

1	Power
2	Audio output
3	Control button
4	Motor control
5	SD card slot
6	Screen

Configuration

A SD is needed in order to store the tape files to play. Fast cards (Class 10 or greater) aren't recommended because there can be problems while reading the data. High capacity (SDXC or greater) cards aren't recommended too.

The card must have the first partition formatted as FAT16 or FAT32.

Besides the card, you have to plug an appropriate audio cable to [ZXUNO+ audio input](#). It must have a 3.5 mm stero jack on one side, and two mono output on the other side (one for each audio channel). The right audio mono is connected to the Miniduino.

If you have a device that can use motor control, you can also use a cable with a 2.6 mm jack.

Copy the tape files ([TAP](#), [TZX](#), [O](#), [P](#), [CAS](#), [TSX](#), etc) to the first partition of the SD card. They can be organized using folders or directories.



The player shows file and directory entries in the order stored in the internal FAT table, and not alphabetically. If you want to see them ordered, you have to reorder the SD card structure with a utility like Fat Sorter for Windows, [FATsort](#) for Linux and MacOS, [YAFS](#), [SDSorter](#) or other.

Use

Once the SD card with the data files is inserted, it's turned on plugging in the included USB power cable.



Pressing down the control button shows the options menu which can set the following:

- Baud Rate: Configures turbo speed baud rates when playing 4B blocks in MSX files (**CAS** and **TSX**)
- Motor Ctrl: Enable this option when a control cable is connected to a proper device (Amstrad, CPC, MSX, etc.)
- Converter (TSXCzxpUEFWS): Enables turbo loading **.CAS** and **.TSX** files, changes signal for Spectrum and Amstrad CPC files and/or change parity when playing Acorn Electron and BBC Micro **.UEF** files
- (Skip BLK)): To disable (Skip ON) or enable automatic pause when 2A blocks are found

When not inside the options menu, the control button is used as a four directional control joystick, which has two different behaviours depending whether the player is stopped or paused.



When the player is stopped (file and directories browser):

- Up and Down move through the current files and directories list
- Left (Stop) goes one level up in the directory tree
- Right (Play/Pause) enters into a directory or, if the selection is a file, tries to play it

Once a file is being played, stop playing it with the left button (Stop) or pause using the right button (Play/Pause).



When in pause (tape block browser):

- Up and Down mov through the tape block files already played (useful for multiload titles, to load a previous level block, for example)
- Left (Stop) cancels the player and goes back to file and directory browser mode
- Right (Play/Pause) continues playing from the selected block
- Press down the control butto to enable or disable turbo mode for MSX

Making TZX or TSX files from other formats

While there are same tape file formats (Commodore, Computers Lynx, etc.) not supported by Maxduino, there are some programs that can, more or less successfully, embed [audio data](#) in a [TSX](#) or [TZX](#) file, which then can be used with Miniduino.

MakeTSX

You can use the following command with NataliaPC's [MakeTSX](#) to create a [TSX](#) file with embedded audio:

```
...MakeTSX -b15 -wav audio_file.wav -tsx new_file.tsx
```

RetroConverter

Jorge Fuertes [RetroConverter](#) can create a [TZX](#) file with a command like this:

```
...retroconv audio_file.wav new_file.tzx
```

Maxduino firmware upgrade

Maxduino firmware is periodically updated and improved. You can track the changes and improvements either at the [Va de Retro forums](#) or at the [GitHub project page](#). To take advantage of this improvements, the Miniduino flash image must be flashed with the updated firmware version.

There are two Miniduino models, one based on STM32 microcontroller, and another one based on ATMega328P.

STM32 Model

Environment setup

Firmware flashing is done from a computer (Windows, Mac, Linux) with [Arduino IDE](#) installed.

You have to install SDFat (1.1.4) software library selecting the menu option Program → include library → manage libraries

Minidiuno microcontroller support must also be added. This is done in two steps:

First, adding ARM Cortex M3 support from menu Tools → board → board manager, and installing "Arduino SAM boards (Cortex-M3)"

Then, you have to add STM32 microcontroller support, downloading the file available at [this link](#).

Extract the contents to the current user directory in

```
...Arduino/hardware/Arduino_STM32
```

If on Windows, install the USB device controller, running (with elevated privileges):

```
...\\drivers\\win\\install_drivers.bat
```

On Linux, install with root privileges the necessary [udev](#) rules:

```
...tools/linux/install.sh
```

On MacOS, if Miniduino does not appear as USB device in Arduino ID when plugged, it may be necessary to install [libusb](#).

Finally, when on Mac or Linux, the file `maple_upload` inside `Arduino_STM32` has to be changed with a text editor. Those lines do not work:

```
if [ $# -eq 5 ]; then
    dfuse_addr="--dfuse-address $5"
else
    dfuse_addr=""
fi
```

And they have to be changed into this:

```
dfuse_addr=""
```

Upgrade

Once you have the environment ready, download the software from the [official repository in GitHub](#)



Miniduino player with STM32 microcontroller is only supported from 1.65 and up

Load the project file with Arduino IDE (for example `MaxDuino_v1.66.ino`).

Check in the file `userSTM32Config.h` that all logo entries are commented except for Miniduino and, if not, change them.

```
...
#ifndef tanque4
#ifndef tanque1
#ifndef dostenques
#ifndef cablemax
#ifndef sony
#define miniduino
...
...
```

Connect the Miniduino device to the computer using the USB cable, and find the assigned port, normally with a name like "Maple Mini" (for example: COM5 Maple Mini)

Set the following options in the "Tools" menu:


```
Board: Generic STM32F103C Series
Variant: STM32F103C8 (20k RAM, 64k Flash)
Upload Method: STM32duino bootloader
CPU Speed: 72Mhz (Normal)
Optimize: Smallest (default)
Port: <Previously identified port>
```

Finally, click on the firmware load button and wait for a few seconds while the project is compiled and loaded into the device.

If everything has been done correctly the Miniduino will restart and show on the screen the new firmware version.

ATMega328P Model**Environment setup****Requirements:**

- One [hex key](#) with the right socket size for the cover screws
- USBasp flash programmer

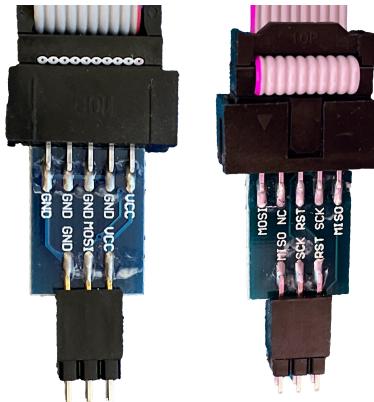

Also, firmware flashing is done from a computer (Windows, Mac, Linux) with [Arduino IDE](#) installed.

You have to install SDFat (1.1.4) software library selecting the menu option Program → include library → manage libraries.

Upgrade


Once you have the environment ready, download the software from the [official repository in GitHub](#)

Load the project file with Arduino IDE (for example [MaxDuino_v1.68.ino](#)).

Check in the file [userconfig.h](#) that all logo entries are commented except for Miniduino and, if not, change them.

```
...
//#define tanque4
//#define tanque1
//#define dostanques
//#define cablemax
//#define sony
#define miniduino
...
```

Connect the Miniduino device to the USBasp programmer, making sure that the connector is in the right position (i.e VCC with VCC, MOSI with MOSI, GND with GND, etc.), and connect the USB adapter to the computer

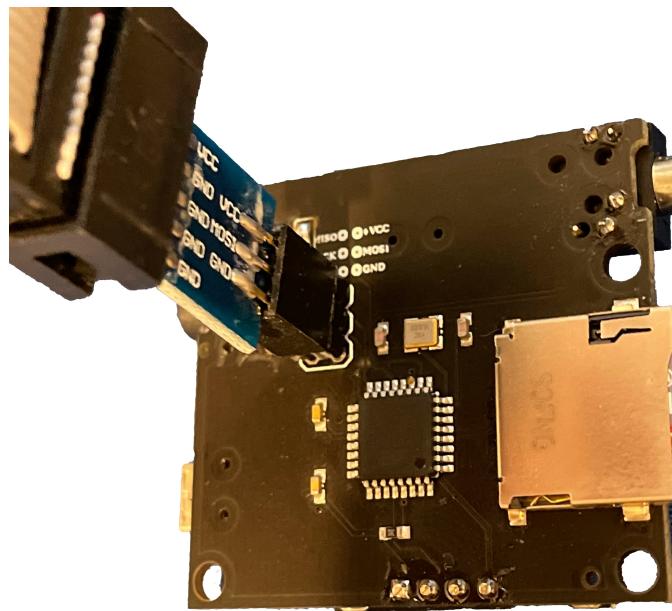

Set the following options in the "Tools" menu:

Board: Arduino Pro or Pro Mini

Processor: ATmega328P (5V,16 Mhz)

Programmer: "USBasp"

Finally, keep pressed the computer keyboard Shift key while clicking on the firmware load button and wait for a few seconds until the project is compiled and loaded into the device.

If everything has been done correctly the Miniduino will restart and show on the screen the new firmware version.

Troubleshooting

Firmware images management

There are several tools with you can use to make and/or edit the contents of **ZX1**, **ZX2**, **ZXD** files.

zx123_tool

This is a tool to analyze, extract and inject data in SPI flash image files for ZX-Uno, ZX DOS and similar devices.

You need to have [Python 3](#) to use it. Depending on the operating system you may have to [install it](#).

Having Python 3, you only need to download the latest version of the tool from the official repository, following [this link](#).

Once extracted, you have to run from a shell the main script using Python 3. This may change depending on the operating system.

For example, on Windows, it's usually:

```
py -3 zx123_tool.py
```

With other operating systems it normally is like:

```
python3 ./zx123_tool.py
```

You also need a SPI flash image file. This can be obtained from within the Spectrum core in "root" mode, with one of the commands **back16m**, **backzx2** or **backzxd**. Once you have obtained the exteacted file from the SD, you can "clean" it leaving only the Spectrum core and the first Spectrum ROM with a command like this:

```
... zx123_tool.py -i FLASH.ZX1 -w -o FLASHempty.ZX1
```

Where **FLASH.ZX1** is the path to the original file and **FLASHempty.ZX1** is the path to the new "clean" file.

List the contents of an image

To see the contents of an image file named **FLASH.ZX1** (installed cores and some configuration info), you can use the command

```
... zx123_tool.py -i FLASH.ZX1 -l
```

To show the contents of the same file, including ZX Spectrum ROMs info:

```
... zx123_tool.py -i FLASH.ZX1 -l -r
```

Change the BIOS of an image

To change the BIOS inside a file named **FLASH.ZX1**, using the BIOS file named **FIRMWARE.ZX1**

```
...zx123_tool.py -i FLASH.ZX1 -a BIOS,FIRMWARE.ZX1
```

You can, at the same time, modify some of the default parameters. For example, with the options; **-m** for video mode: 0 (PAL), 1 (NTSC) or 2 (VGA), **-k** for the keyboard layout: 0 (Auto), 1 (ES), 2 (EN) or 3 (Spectrum).

This way to change the BIOS of a file named **FLASH.ZX1**, using the BIOS file **FIRMWARE.ZX1**, and also set the video mode to VGA:

```
...zx123_tool.py -i FLASH.ZX1 -a BIOS,FIRMWARE.ZX1 -m 2
```

There are also options to set the BIOS boot delay time, the default core or the default Spectrum ROM. See the [documentation](#) for more info.

Add a Spectrum ROM to an image

To add a Spectrum ROM file named `48.rom`, with the name `Spec48` and using the slot number 5, you can use a command like:

```
...zx123_tool.py -i FLASH.ZX1 -a ROM,5,xdnlh17,Spec48,48.rom
```

See the [documentation](#) for all the possible options when adding a Spectrum ROM.

Amongst the information you give when adding a ROM, there are some flags used to tell which hardware options, etc, you want to have enabled or disabled when loading the ROM, as shown in this table:

<code>i</code>	Keyboard issue 3 enabled (instead of issue 2)
<code>c</code>	Disable memory contention
<code>d</code>	Enable DivMMC
<code>n</code>	Enable NMI DivMMC (esxdos Menu)
<code>p</code>	Use Pentagon Timings
<code>t</code>	Use 128K timings
<code>s</code>	Disable DivMMC and ZXMMC ports
<code>m</code>	Enable Timex Horizontal MMU
<code>h</code>	Disable ROM high bit (1FFD bit 2)
<code>l</code>	Disable ROM low bit (7FFD bit 4)
<code>1</code>	Disable 1FFD port (+2A/3 paging)
<code>7</code>	Disable 7FFD port (128K paging)
<code>2</code>	Disable TurboSound (secondary AY chip)
<code>a</code>	Disable AY chip
<code>r</code>	Disable Radastanian mode
<code>x</code>	Disable Timex mode
<code>u</code>	Disable ULAplus

Install a Core to an image

For example, to install a core in space 3, from a file named **TBBLUE.ZX1**, with the name **TBBlue**, use a command like this:

```
...zx123_tool.py -i FLASH.ZX1 -a 'CORE,3,TBBlue,TBBLUE.ZX1'
```

If you want also to set the core as the default, use a command like:

```
...zx123_tool.py -i FLASH.ZX1 -a 'CORE,3,TBBlue,TBBLUE.ZX1' -c 3
```

Change esxdos ROM of an image

Just like the BIOS firmware, you can install a ROM esxdos file, with a command like this:

```
...zx123_tool.py -i FLASH.ZX1 -a esxdos,ESXMMC.BIN
```

Mix several actions in one line

Please do note that you can add several actions in one command line. For example, to "clean" an image file named **FLASH.ZX1**, creating a new one named **FLASHnew.ZX1**, installing the BIOS from the file **FIRMWARE.ZX1**, set up video mode to VGA, the keyboard in Spectrum mode, add a Spectrum ROM file **48.rom**, with the name **Spec48** while ussing slot number 5, install a core at space 3, from a file named **TBBLUE.ZX1**, with the name **TBBlue**, as default core:

```
... zx123_tool.py -i FLASH.ZX1 -w -o FLASHnew.ZX1 -a BIOS,FIRMWARE.ZX1 -m 2 -k 3 -a
ROM,5,xdnlh17,Spec48,48.rom -a CORE,3,TBBlue,TBBLUE.ZX1 -c 3
```


Firmware recovery

Sometimes (e.g. when installing an experimental core or when upgrading the ZX Spectrum Core or the BIOS) it may happen that the ZXUNO+ stops booting. The board LEDs are on, but there is no display, and it doesn't do anything when trying the different key combinations to access BIOS setup, etc.

When this happens, there are several recovery methods that let you install again the firmware.

JTAG cable connections

Later, in some of the recovery steps, when talking about jump wires or USB-Blaster connections to the ZXUNO+ board, you can use these images as reference.

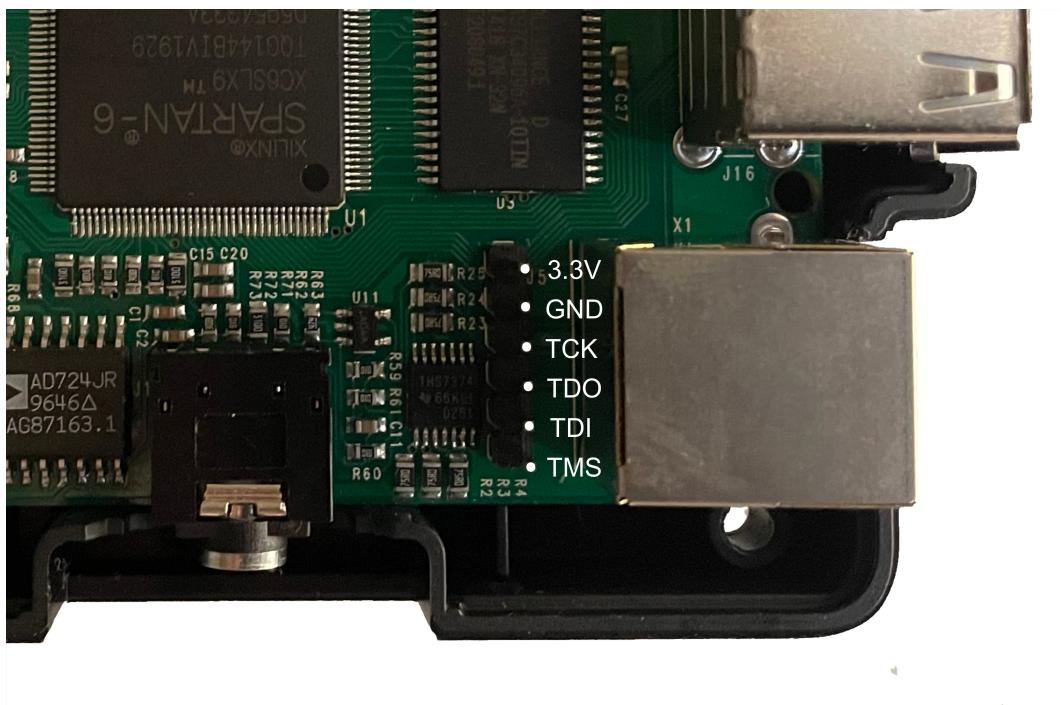

DO NOT connect the 3V line

Recovery using a Raspberry Pi

Hardware required:

- Raspberry Pi (with SD card, keyboard, display, power supply, etc.) and with internet connection
- 5 [jump wires](#) (if possible, female on both sides) or, instead a USB-Blaster cable
- One screwdriver for ZXUNO+ cover screws
- SD for ZXUNO+ with the first partition formatted as FAT16 or FAT32
- Keyboard and display for ZXUNO+

Software required:

- Flash image and recovery file for ZXUNO+ from [Github repository](#) and [ZX-Uno forum](#)

Instruction Steps:

1. Install Raspberry Pi OS (formely known as Raspbian) to the Raspberry Pi SD card (using [the official download](#), [NOOBS](#), [PINN](#), etc.)
2. Install Open OCD:


```

sudo apt-get update
sudo apt-get install git autoconf libtool make pkg-config
sudo apt-get install libusb-1.0-0 libusb-1.0-0-dev telnet
sudo apt-get install libusb-dev libftdi-dev
git clone git://git.code.sf.net/p/openocd/code openocd-code
cd openocd-code/
./bootstrap
./configure --enable-usb_blaster --enable-sysfsgpio --enable-bcm2835gpio
make
sudo make install
cd ..
rm -rf ./openocd-code

```

3. Connect USB-Blaster or jump wires if using GPIO. In this case, open the ZXUNO+ case and, [as explained before](#) connect the FPGA JTAG lines (TMS, TDI, TDO, TCK and GND), using the wires, to the Raspberry Pi GPIO pins.

If using a GPIO connection, take note of the chosen pins, making sure that GND is connected with GND.

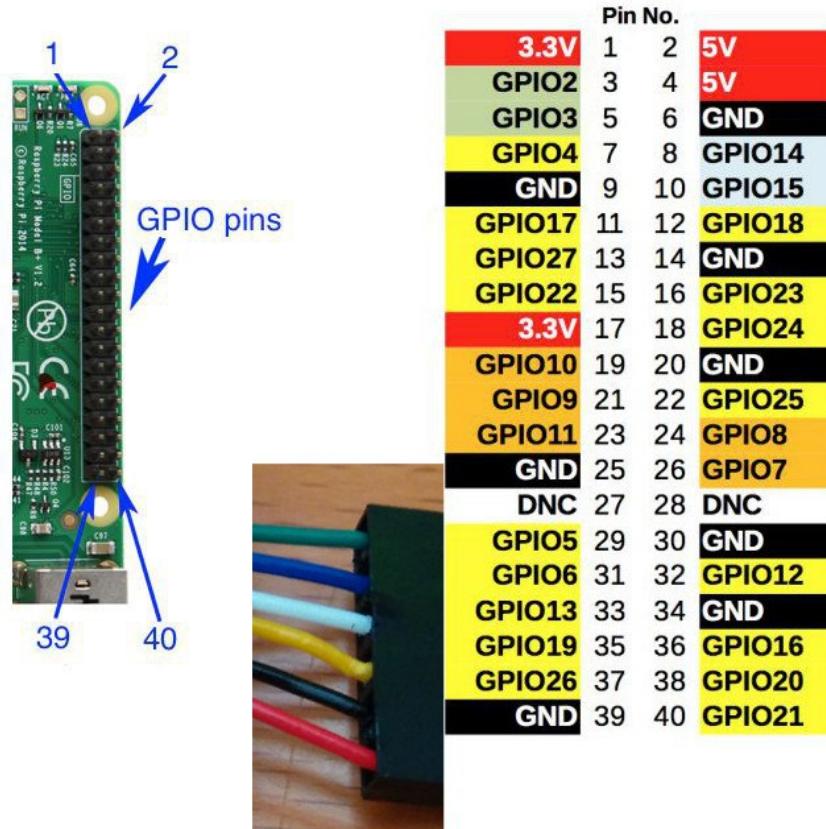

In this example, the 31, 33, 35, 37 and 39 pins will be used (corresponding to GPIO #6, GPIO #13, GPIO #19, GPIO #26 and GND), like this:

ZXUNO+ JTAG	GPIO	Raspberry Pi Pin
TMS	GPIO#6	31
TDI	GPIO#13	33
TDO	GPIO#19	35
TCK	GPIO#26	37
GND	GND	39

4. Copy to the Raspberry Pi the file named `recovery.bit` previously downloaded from the [ZX-Uno forum](#). For our example, it will be at `/home/pi/zxunoplus/unbrick/`
5. If using GPIO, make a copy of Open OCD configuration file, to the same directory where `recovery.bit` is.

```
cp /usr/local/share/openocd/scripts/interface/raspberrypi2-native.cfg
/home/pi/zxunoplus/unbrick/
```

6. For GPIO connection, edit `raspberrypi2-native.cfg` copy, updating `bcm2835gpio_jtag_nums` (uncommenting, if necessary), with your JTAG and GPIO connection numbers, at the line `bcm2835gpio_jtag_nums`. For our example:

```
# Header pin numbers: 37 31 33 35
bcm2835gpio_jtag_nums 26 6 13 19
```

7. Comment, if it wasn't already, the line `bcm2835gpio_swd_nums` (not necessary for USB-Blaster connection):

```
#bcm2835gpio_swd_nums 11 25
```

8. Add, to the end of the file, the line `adapter speed 250` (again, not necessary for USB-Blaster):

```
adapter speed 250
```

9. Turn on the ZXUNO+.

10. Make sure that, on the Raspberry Pi, we are in the directory where `recovery.bit` is, and execute the command that loads the BIOS on recovery mode, using the path to the previously edited `raspberrypi2-native.cfg`.

For GPIO connection:


```
cd /home/pi/zxunoplus/unbrick
sudo openocd -f /home/pi/zxunoplus/unbrick/raspberrypi2-native.cfg -f
/usr/local/share/openocd/scripts/cpld/xilinx-xc6s.cfg -c "init; xc6s_program xc6s.tap;
pld load 0 recovery.bit ; exit"
```

For USB-Blaster connection:

```
sudo openocd -f /usr/local/share/openocd/scripts/interface/altera-usb-blaster.cfg -f
/usr/local/share/openocd/scripts/cpld/xilinx-xc6s.cfg -c "init; xc6s_program xc6s.tap;
pld load 0 recovery.bit ; exit"
```

11. If all goes well, we will see that the FPGA LED change their state and the BIOS is shown on the display.

If there is no image on the display, press **Scroll Lock** to switch between RGB and VGA modes, just in case the recovery BIOS did start in the wrong mode for our setup.

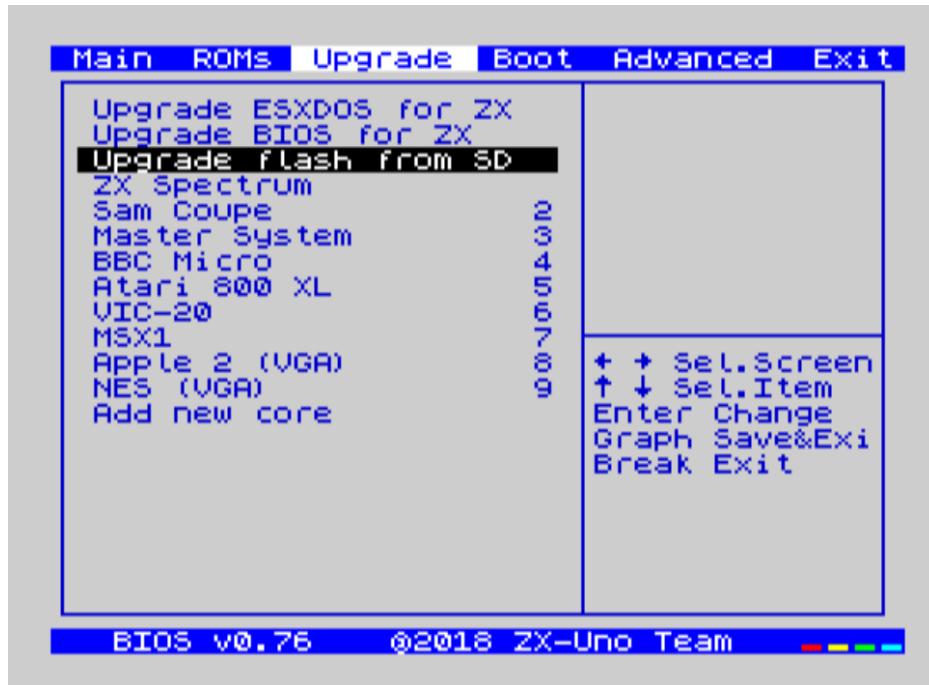

12. Insert in the ZXUNO+ the SD card formatted as FAT16 o FAT32, and with the [FLASH.ZX1](#) file downloaded previously.
13. If using a USB-Blaster connection, unplug the connector.

14. Select the option **Upgrade Flash from SD**. Press Enter, choose **Yes**, and press Enter again to start the Flash writing process.



This process can't be undone, and it will replace all the previously installed cores, the BIOS, the ZX Spectrum ROMs and their configuration with the data in the image file.

15. After some minutes, the process will end, and, after turning the ZXUNO+ off and on, it should start fine.



If no image is shown, press again **Scroll Lock** to switch between RGB and VGA modes. In this case, you should have to enter the BIOS and change [the right advanced setting](#) that matches your display.

References

[ZX-Uno](#)

[ZX-Uno FAQ](#)

[Guía rápida del ZX-Uno](#)

[Core ZX Spectrum](#)

[The ZX Spectrum +3e Homepage](#)

[Sharing a +3e disk with PC \(FAT\) partitions](#)

[Layouts de teclado](#)

[Firmware de teclado para ZX Go+](#)

[Almost \(In-\) Complete List of esxDOS DOT-Commands](#)

[WiFi \(RetroWiki\)](#)

[Cargando Leches 2.0](#)

[WiFi en ZX-Uno](#)

[Core de ZX-Uno Test UART \(WiFi\)](#)

[Network tools for ZX-Uno pack](#)

[ESP8266 AT Instruction Set](#)

[Vídeos Radastanianos](#)

[Nuevo core zx48](#)

[ZX 48 for ZX-UNO \(Kyp\)](#)

[Core MSX](#)

[MSX1FPGA](#)

[MSX Pack](#)

[Nextor para MSX](#)

[Nextor User Manual](#)

[MSX-DOS](#)

[Atom Software Archive en carpeta ATOM](#)

[Teclado Core Atom](#)

[Core de NES para ZX-Uno](#)

[ColecoFPGA on GitHub](#)

[TOSEC: Magnavox Odyssey 2 \(2012-04-23\)](#)

[Videopac G7000 / Odyssey2 for FPGA](#)

[Maxduino - guía de uso](#)

[MakeTSX](#)

[RetroConverter](#)

[Lince Script](#)

[Programming a Spartan 6 with a Raspberry Pi](#)

[Tutorial para desbripear el ZX-Uno con una Raspberry](#)

[Como programar un UnAmiga con la Raspberry Pi \(o Linux\) con el USB-Blaster y OpenOCD](#)