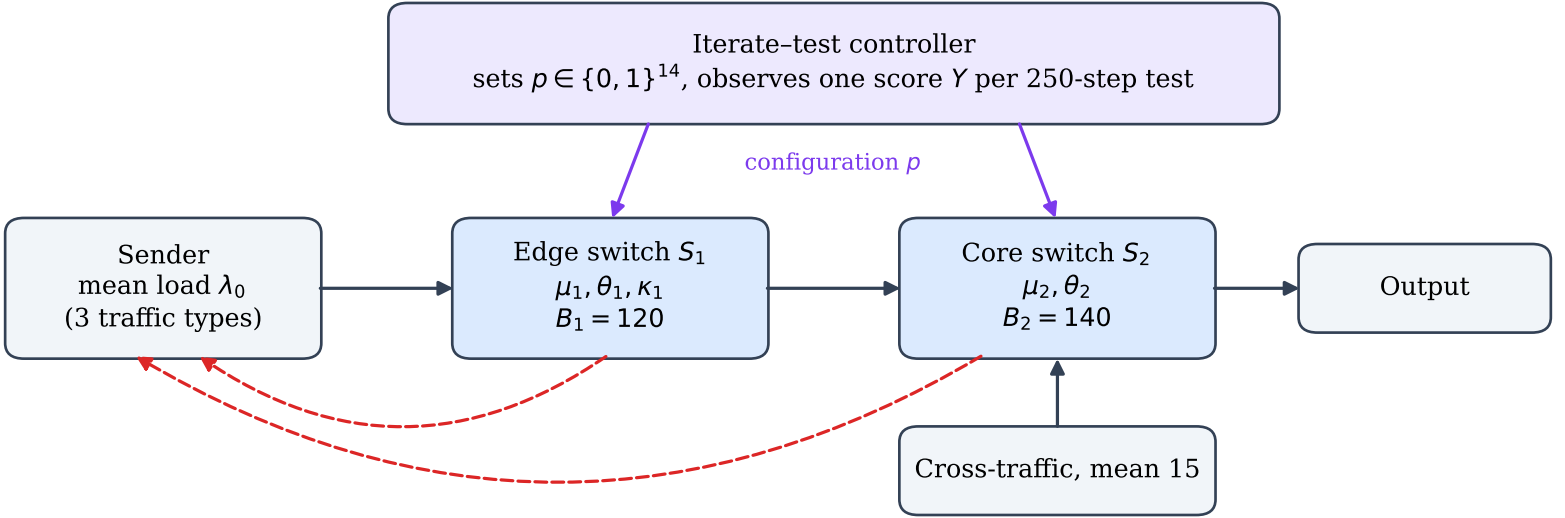
Iterate–test controller
sets $p \in \{0,1\}^{14}$, observes one score Y per 250-step test
configuration p
Sender
mean load λ_0
(3 traffic types)
Edge switch S_1
$\mu_1, \theta_1, \kappa_1$
$B_1 = 120$
Core switch S_2
μ_2, θ_2
$B_2 = 140$
Output
Cross-traffic, mean 15
loss at S_1 and S_2, fed back after $\tau = 5$ steps