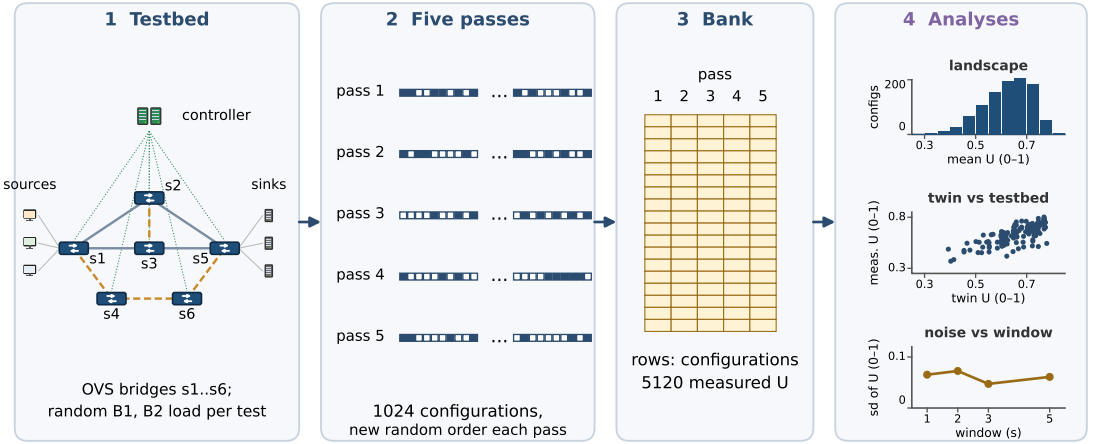
1 Testbed
controller
sources
s2
sinks
s1
s3
s5
s4
s6
OVS bridges s1..s6;
random B1, B2 load per test
2 Five passes
pass 1
pass 2
pass 3
pass 4
pass 5
1024 configurations,
new random order each pass
3 Bank
pass
1 2 3 4 5
rows: configurations
5120 measured U
4 Analyses
landscape
configs
200
0
0.3
0.5
0.7
mean U (0–1)
twin vs testbed
meas. U (0–1)
0.8
0.3
0.3
0.5
0.7
twin U (0–1)
noise vs window
sd of U (0–1)
0.1
0
1
2
3
5
window (s)