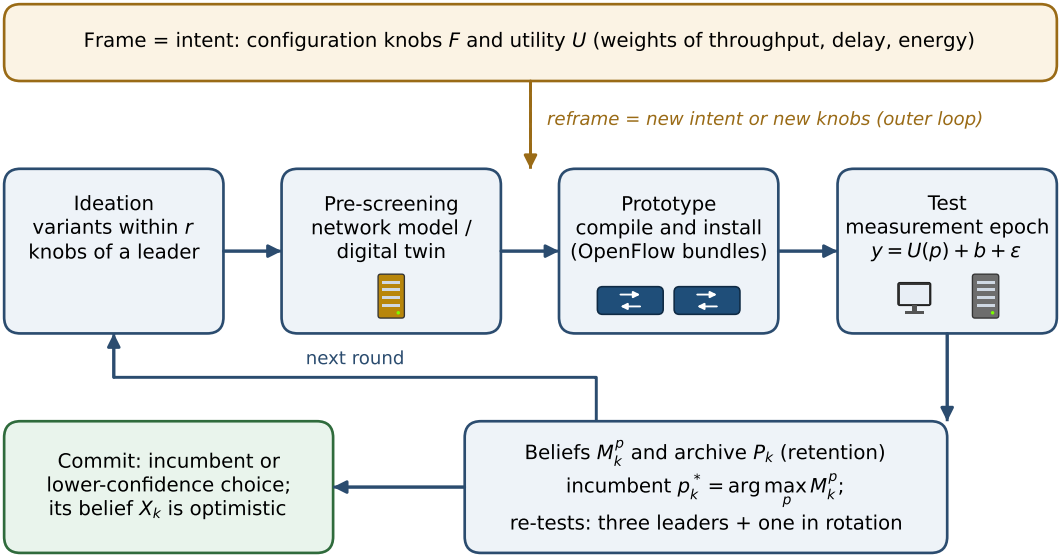
Frame = intent: configuration knobs F and utility U (weights of throughput, delay, energy)
reframe = new intent or new knobs (outer loop)
Ideation
variants within r
knobs of a leader
Pre-screening
network model /
digital twin
Prototype
compile and install
(OpenFlow bundles)
Test
measurement epoch
$y = U(p) + b + \varepsilon$
next round
Commit: incumbent or
lower-confidence choice;
its belief X_k is optimistic
Beliefs M_k^p and archive P_k (retention)
incumbent $p_k^* = \arg\max_p M_k^p$;
re-tests: three leaders + one in rotation