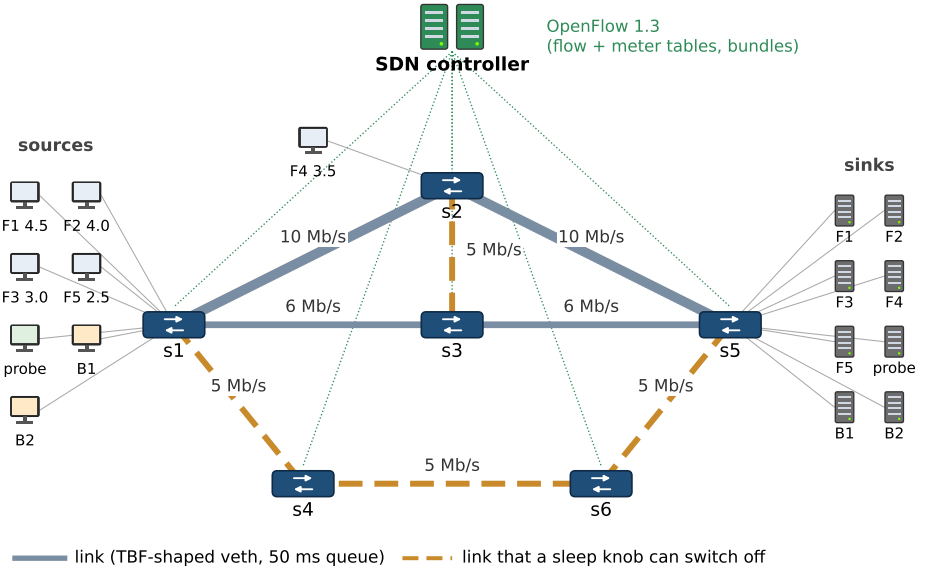
SDN controller
OpenFlow 1.3
(flow + meter tables, bundles)
sources
sinks
F4 3.5
F1 4.5
F2 4.0
F3 3.0
F5 2.5
probe
B1
B2
s1
s2
s3
s4
s5
s6
10 Mb/s
10 Mb/s
5 Mb/s
6 Mb/s
6 Mb/s
5 Mb/s
5 Mb/s
5 Mb/s
F1
F2
F3
F4
F5
probe
B1
B2
link (TBF-shaped veth, 50 ms queue)
link that a sleep knob can switch off
host colours: blue = elastic TCP demand (rate in Mb/s), green = latency probe, orange = uncontrolled UDP cross-traffic