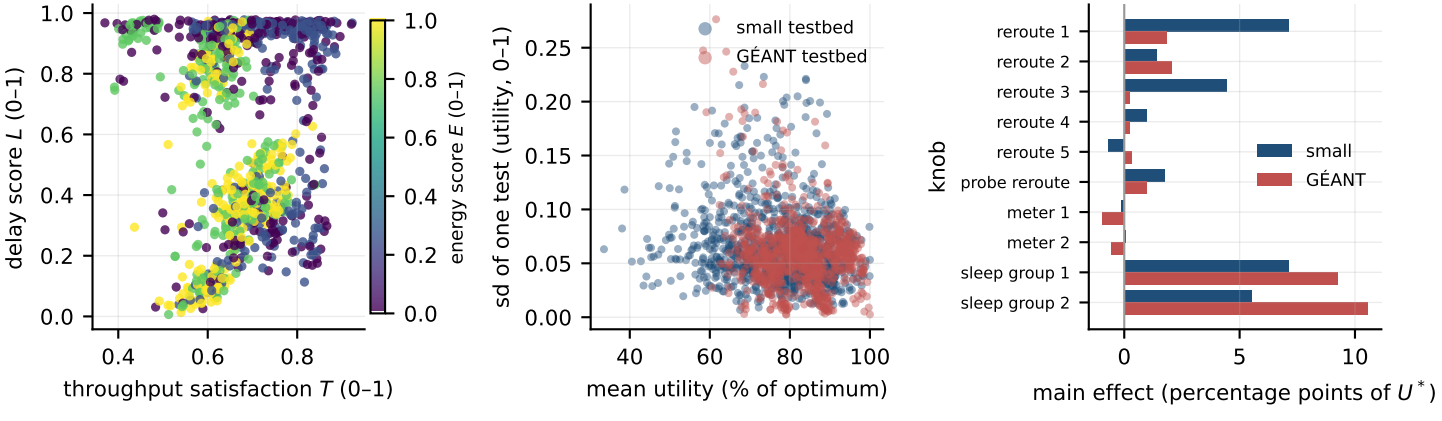

(a) criteria, small testbed
delay score L (0–1)
throughput satisfaction T (0–1)
energy score E (0–1)
(b) noise per configuration
small testbed
GÉANT testbed
sd of one test (utility, 0–1)
mean utility (% of optimum)
(c) effect of each knob
reroute 1
reroute 2
reroute 3
reroute 4
reroute 5
probe reroute
meter 1
meter 2
sleep group 1
sleep group 2
knob
small
GÉANT
main effect (percentage points of U*)