
PinVisual — 30-servo wiring (5 × 6 display)

ESP32 → 2 × PCA9685 over I²C (SDA D21, SCL D22). Servos powered from each board's V+ screw terminal. Firmware: PV_SERVO_BOARDS 1

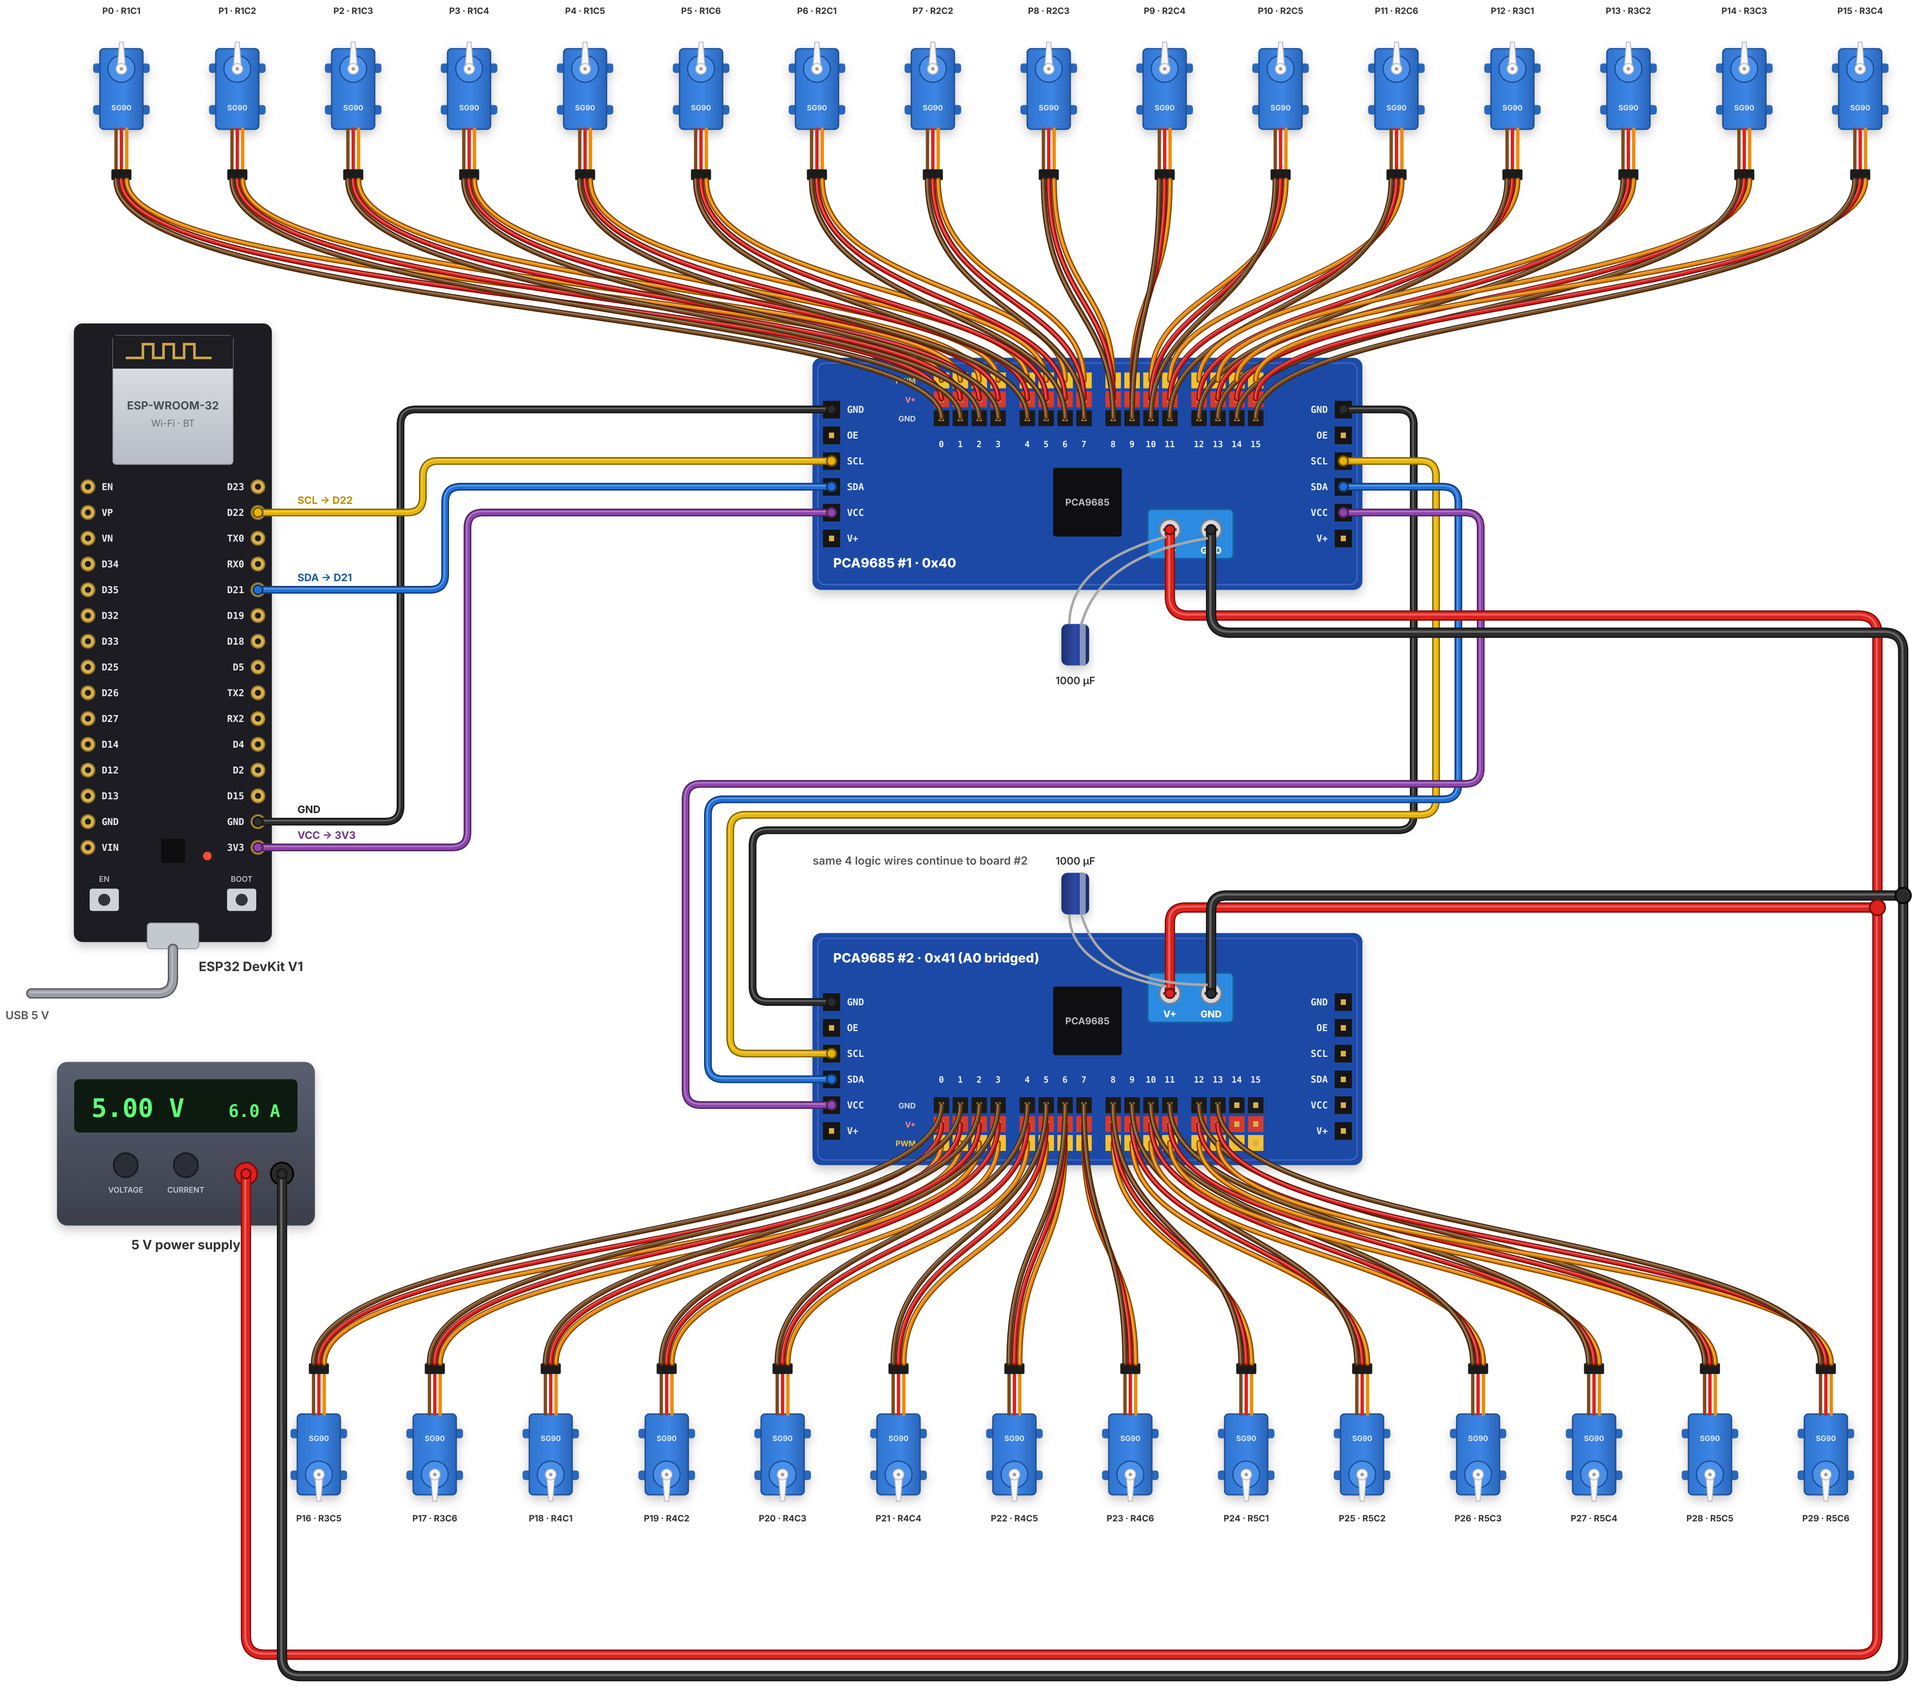

Wires

- +5 V servo power
- GND (all grounds joined)
- 3.3 V logic → VCC
- I²C SDA (D21)
- I²C SCL (D22)
- Servo signal (PWM)
- Servo GND (brown lead)

Board #1 (0x40): P0–P15
Board #2 (0x41): P16–P29 · channels 14–15 spare

P = pin number, R/C = row/column seen from the user's side

5 V → each board's V+ / GND screw terminal (separate pair per board)