


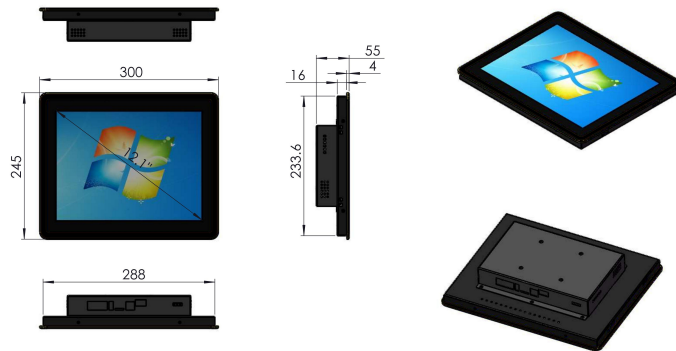

Display	Display	color active matrix TFT
	Resolution	1024 x 768
	Brightness (cd/m ²)	Typ 500nit; min 400nit
	Contrast Ratio	Typ: 1200;min:900
	Backlight Type	PLED
	Backlight Life Time	50K Hours
	Colors	16.7M
	LCD Viewing Angle (T/B/L/R)	88/88/88/88
	Pixel Pitch (mm)	80(H) × 240 (V)
Touch Panel	Type	4-wire Resistive Type
	Accuracy	Active Area Length(X)±2%, Width(Y)±2%
Processor		Quad-core 1.6GHZ frequency
hardware port	Settings button	Reset and IP setting buttons respectively
	SD Card Slot	TfCard
	USB Host	USB 2.0 x 1
	USB Client	Ethernet, Modbus_TCP, IP: 192.168.5.123
	Ethernet	IP: 192.168.1.123
	EtherCAT	Standard EtherCAT communication
	RS232/485	RS-485 4W
	RS-485 Dual Isolation	N/A
	CAN Bus	NO
	Audio Output	N/A
	Video Input	N/A
Power	Input Power	24±20%VDC
	Power Isolation	Built-in
	Power Consumption	1A@24VDC
	Backlight withstand voltage	36V (55mA)
	Vibration Endurance	Seismic 1.2GHZ
Specification	PCB Coating	Yes
	Enclosure	Metal
	Dimensions WxHxD	326.5 x 253.5 x 11.3 mm
Environment	Storage Temperature	-25° ~ 70°C
	Operating Temperature	-5° ~ 50°C
Software		CODESYS