
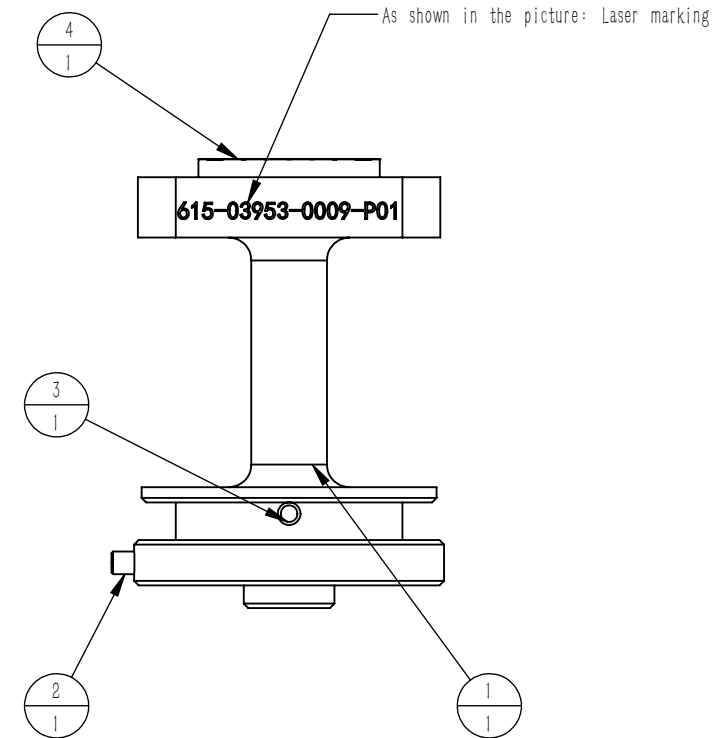
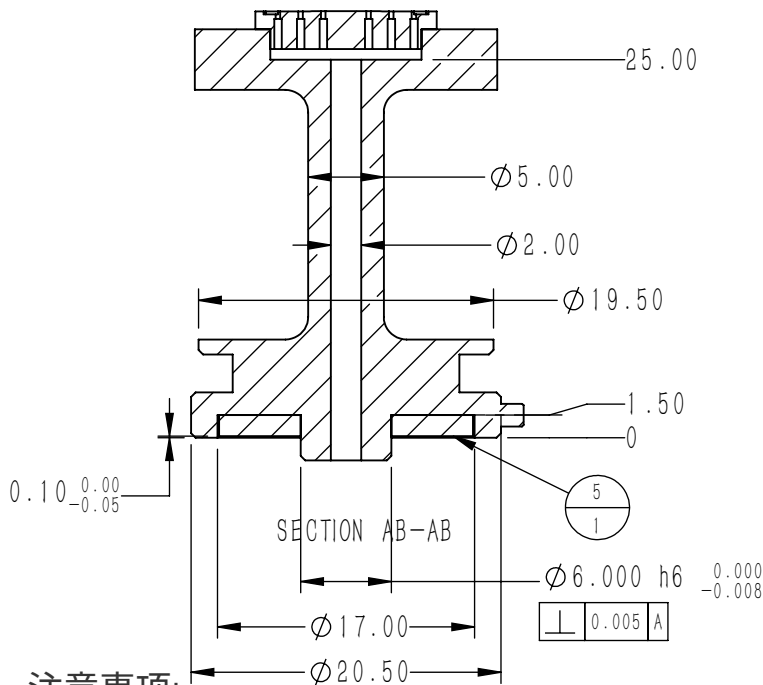
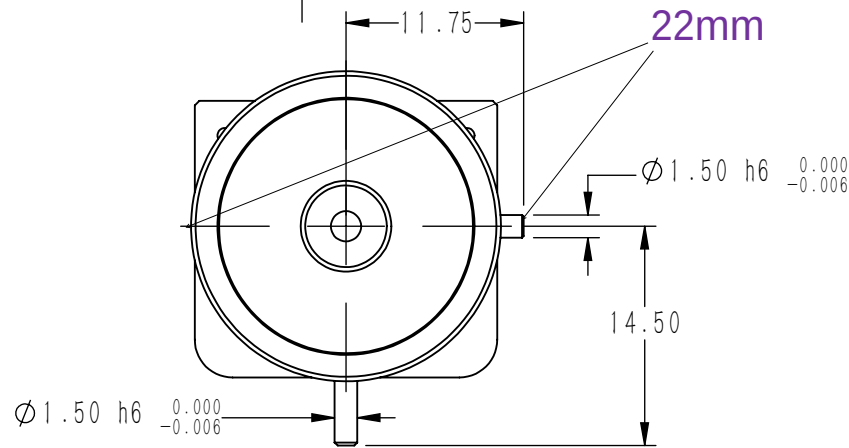
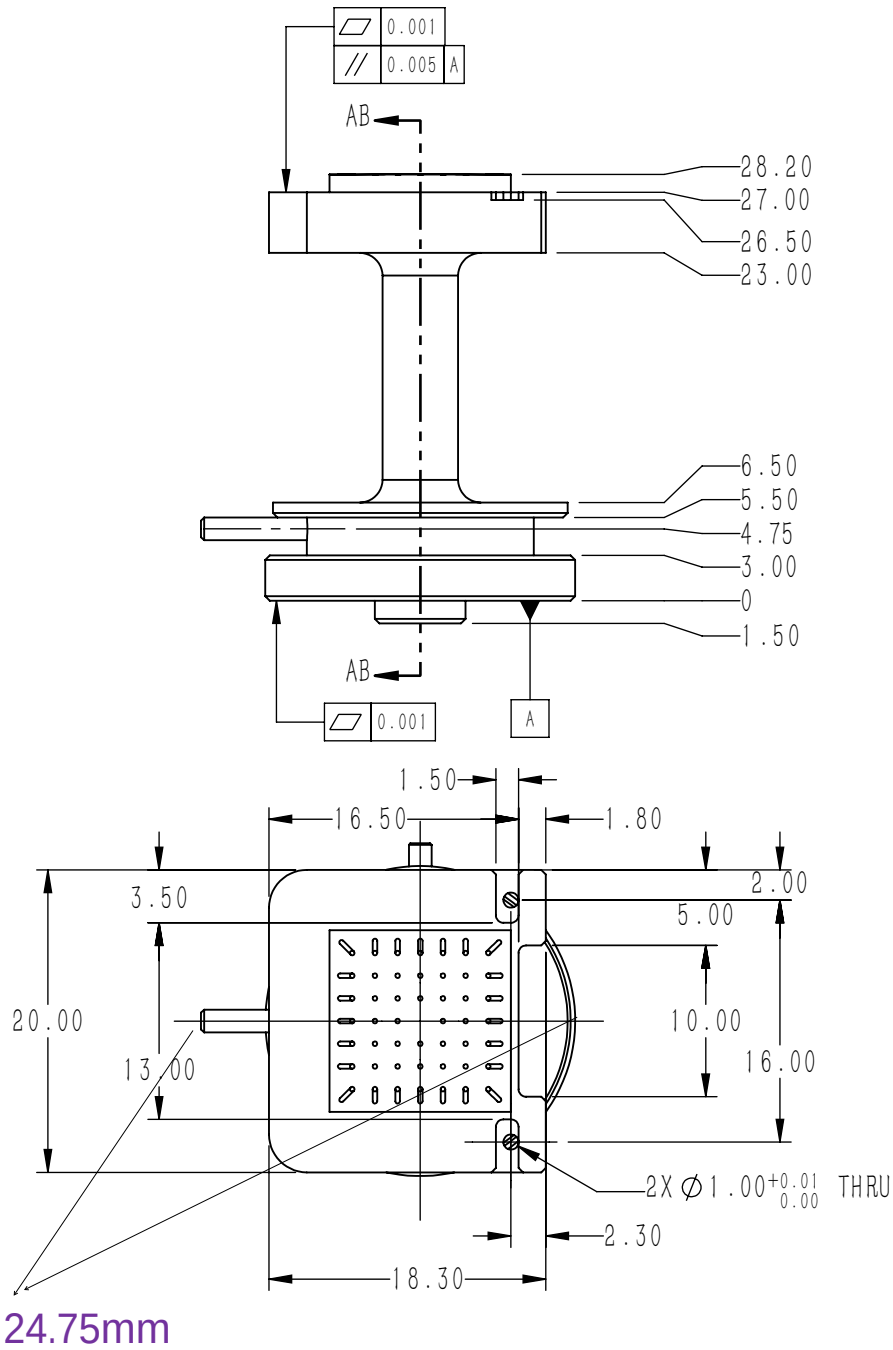







- 注意事项:
- 1、去除所有飞边、毛刺、钝边；
 - 2、弯曲圆直径R(当 $t \leq 1.5$ 时, $R = 1$ ；当 $1.5 < t \leq 2.5$ 时, $R = 2$ ；当 $2.5 < t \leq 3$, $R = 3$ 时)。
 - 3、参照文件180-00089-000进行清洗，达到2级要求；
(1级-在大气中工作所需的清洁度，2级-在真空下工作所需的清洁度 $> 1 \times 10^{-3}$ 托)
 - 4、参考文件180-03890-000包装零件；

Item	Component	Description	QTY	Unit	Material
4	615-03953-0009	Nozzle, 12x12, B30, D2WHS	1	EA	ASTM 7075
2	Locating Pin	1.5x3	1	EA	SUS 304
3	Locating Pin	1.5x10	1	EA	SUS 304
4	Peek	Peek	1	EA	PEEK5600LF30
5	Gasket	Gasket	1	EA	SUS 440C

Notes:

- 1、Remove all flash, burr, edge blunt;
- 2、Bending round diameter R_L (when $t \leq 1.5$, $R = 1$; When $1.5 < t \leq 2.5$, $R = 2$; When $2.5 < t \leq 3$, $R = 3$).
- 3、Refer document 180-00089-000 to clean, reaching to class 2 demand;
(Class 1 - Cleanliness required for service at atmosphere
Class 2 - Cleanliness required for service at vacuum $> 1 \times 10^{-3}$ torr)
- 4、Refer document 180-03890-000 to package parts;

UNLESS OTHERWISE SPECIFIED (mm)		HN			
ASME Y14.5-2009 APPLIES DO NOT SCALE DRWING		SURFACE 6.3 FINISH		TITLE Nozzle, 12x12, B30, D2WHS	
ANGULAR TOL - $\pm 5^\circ$ CHAMFER TOL - $\pm 5^\circ$		LINEAR .XX= ± 0.25 TOL .XXX= ± 0.130		SIZE A3	COMMENTS: 1ST Angle Projection
DRAWN		DATE		SHEET 1 / 2	REV P01
CHECKED		DATE		DWG NO. 615-03953-0009	
APPROVED		DATE			
FINISH SEE NOTES		MATERIAL ASTM 7075			

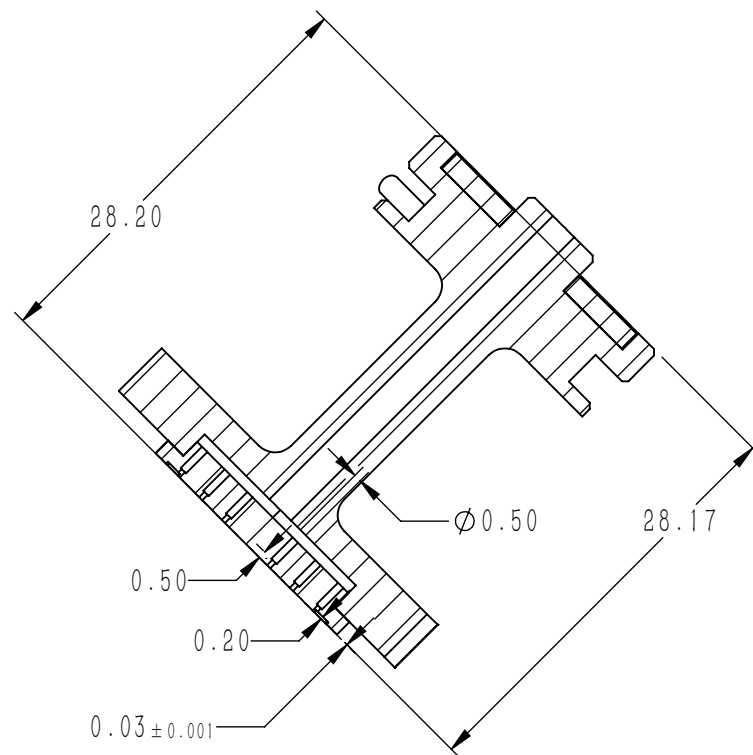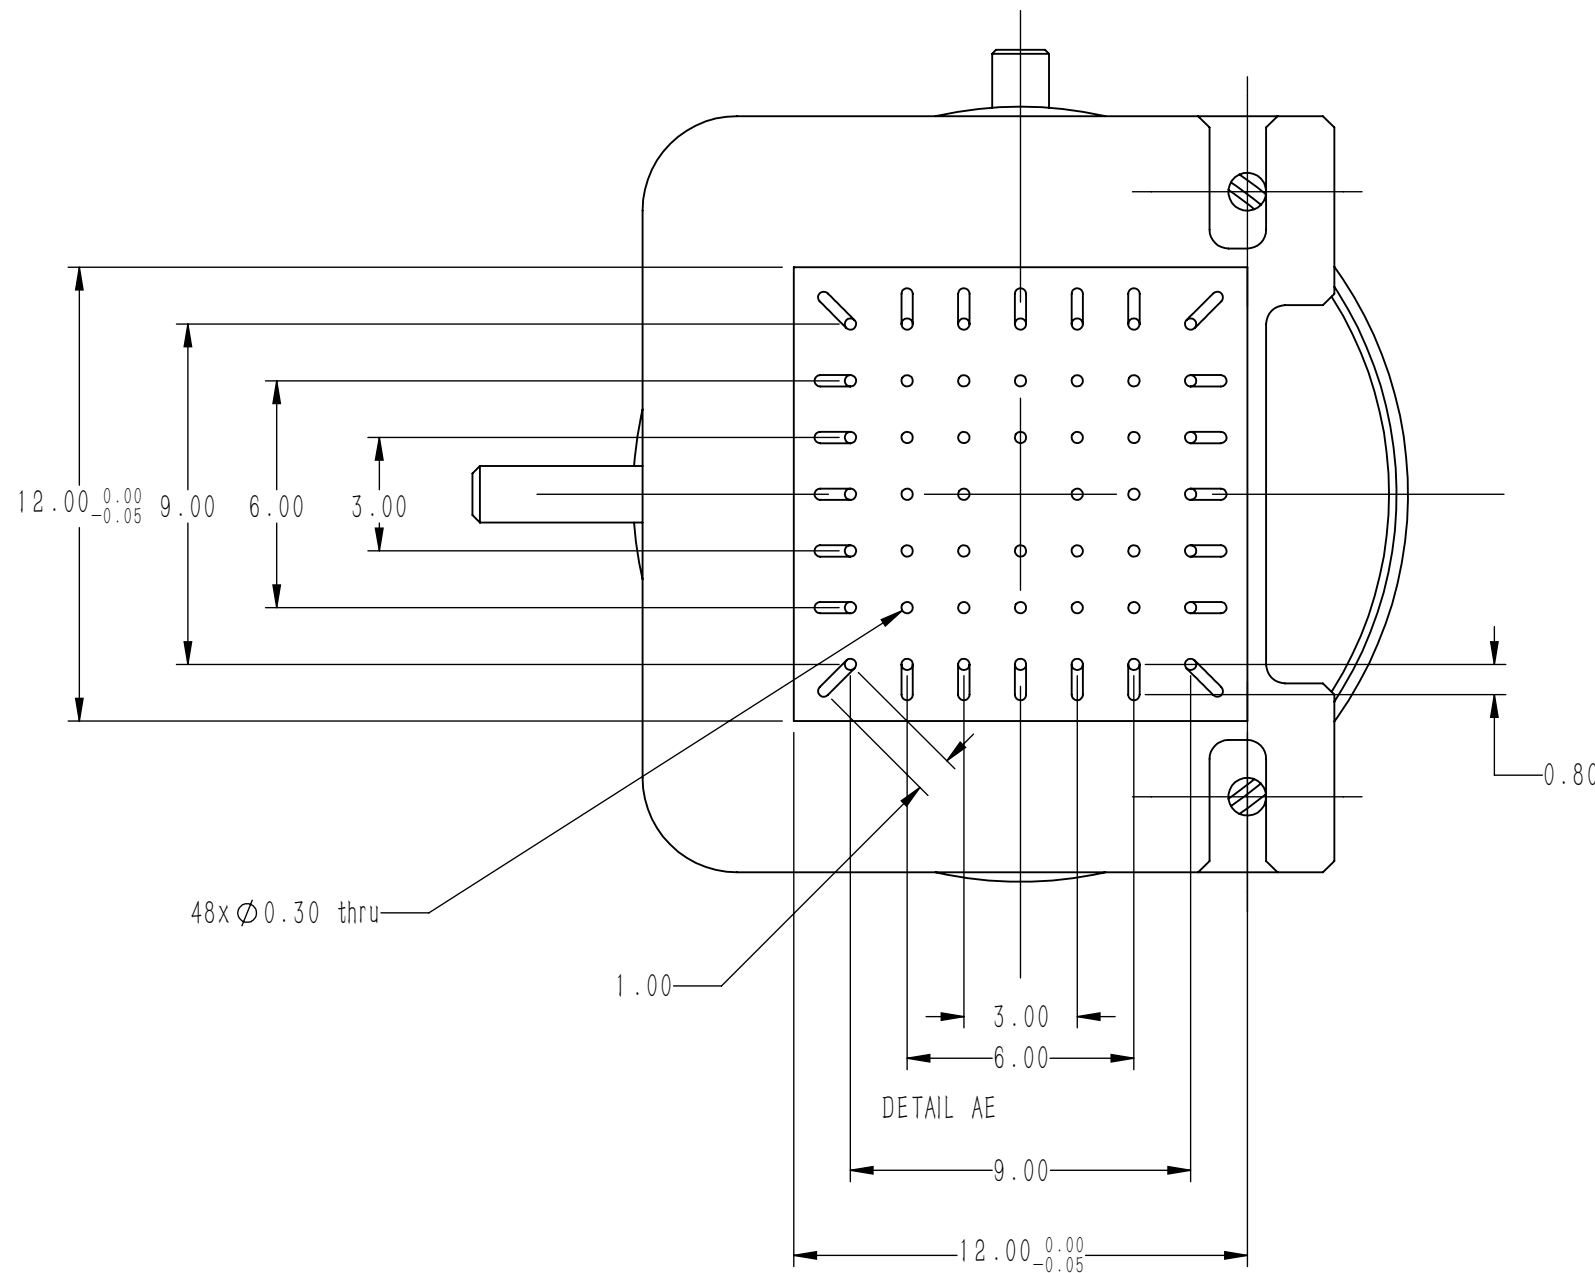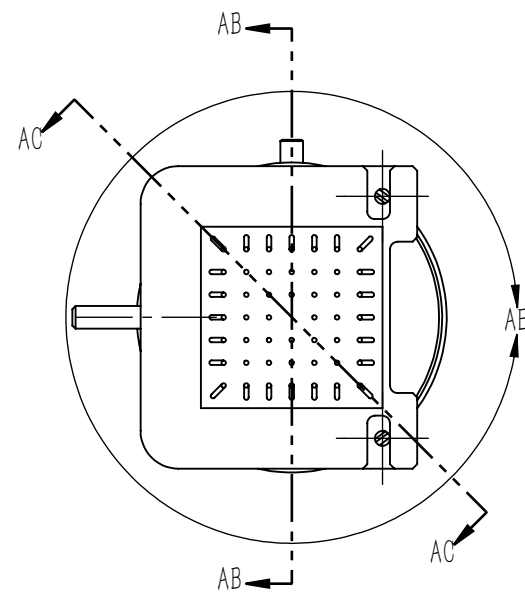

SECTION AC-AC

HN

TITLE			
Nozzle, 12x12, B30, D2WHS			
SIZE	COMMENTS: 1ST	SHEET	REV
A3	Angle Projection	2 / 2	P01
DWG	NO. 615-03953-0009		